



www.myfui.com

Standard Parts List

CORPORATE SALES

DALLAS, TX

3000 AVENUE F

ARLINGTON, TX 76011

(800) 348-8467 (281) 500-9570 FAX

CLEVELAND, OH

(800) 348-8467 (817) 860-8517 FAX

HOUSTON, TX

(800) 633-5340 (281) 500-9570 FAX

SALT LAKE CITY, UT

(800) 348-8467 (817) 860-8517 FAX

CANADA -AURORA, ONTARIO

(877) 644-4403 (905) 713-3927 FAX

ATLANTA, GA

(800) 348-8467 (817) 860-8517 FAX

A large, thin black oval frame containing the text 'International and Conversion Adapters' in a black serif font.


*International and
Conversion Adapters*

TABLE OF CONTENTS

British Parallel Pipe	3-18
British Standard Taper	19-20
Japanese Industrial Standard	21-23
Metric	24-31
Metric Flareless	32-48
Metric Miscellaneous	49

Identifying Metric Connections

German DIN Compression



Series	Oper. Press. (bar)	Tube O.D.	Thread Size
LL	100	4	M 8x1
LL	100	6	M 10x1
LL	100	8	M 12x1
L	250	6	M 12x1.5
L	250	8	M 14x1.5
L	250	10	M 16x1.5
L	250	12	M 18x1.5
L	250	15	M 22x1.5
L	160	18	M 26x1.5
L	160	22	M 30x2
L	100	28	M 36x2
L	100	35	M 45x2
L	100	42	M 52x2
S	630	6	M 14x1.5
S	630	8	M 16x1.5
S	630	10	M 18x1.5
S	630	12	M 20x1.5
S	630	14	M 22x1.5
S	400	16	M 24x1.5
S	400	20	M 30x2
S	400	25	M 36x2
S	250	30	M 42x2
S	250	38	M 52x2

Tube O.D. Light MM	Tube O.D. Heavy MM	Metric Thread Size	Male Thread O.D.		Female Thread I.D.	
			MM	Frac. (in.)	MM	Frac. (in.)
6		M12x1.5	12	15/32	10.5	13/32
8	6	M14x1.5	14	9/16	12.5	1/2
10	8	M16x1.5	16	5/8	14.5	9/16
12	10	M18x1.5	18	23/32	16.5	21/32
	12	M20x1.5	20	25/32	18.5	23/32
15	14	M22x1.5	22	7/8	20.5	13/16
	16	M24x1.5	24	15/16	22.5	7/8
18		M26x1.5	26	1-1/32	24.5	31/32
22	20	M30x2.0	30	1-3/16	28	1-1/8
28	25	M36x2.0	36	1-13/32	34	1-11/32
	30	M42x2.0	42	1-21/32	40	1-9/16
35		M45x2.0	45	1-25/32	43	1-23/32
42	38	M52x2.0	52	2-1/32	50	1-31/32

This connection style consists of a common male and three different female styles.

The male has a straight metric thread, a 24° included angle and a recessed counterbore that matches the tube O.D. used with it. The female may be a tube, nut and sleeve, a globeseal or a globeseal with an O-Ring in the nose.

Metric Thread Size	Male Thread O.D. (A) (mm)	Female Thread I.D. (B) (mm)
M 10x1	10	8.5
M 12x1.5	12	10.5
M 14x1.5	14	12.5
M 16x1.5	16	14.5
M 18x1.5	18	16.5
M 20x1.5	20	18.5
M 22x1.5	22	20.5
M 26x1.5	26	24.5
M 27x2	27	25.5
M 30x2	30	28.5
M 33x2	33	31.5
M 42x2	42	39.9
M 48x2	48	46.5
M 52x2	52	50.5
M 65x2	65	62.9
M 78x2	78	75.9
M 90x2	90	87.9

Common Port Sealing Designs



DIN 3852 Form B: Sealing by means of a sealing "shoulder." Female thread is parallel.



DIN 3852 Form C: Sealing by means of tapered thread. Female thread must be tapered to achieve rated operating pressure.



Form PEFLEX: Sealing by means of a profiled elastomer ring recessed into the fitting body. Female thread is parallel.




DIN 3852 Form A (formerly Form D): Sealing by means of a washer or bonded seal. Female thread is parallel.




Form SAE J514: Sealing by means of an O-Ring in the thread undercut. Female thread is parallel.

British Standard Pipe

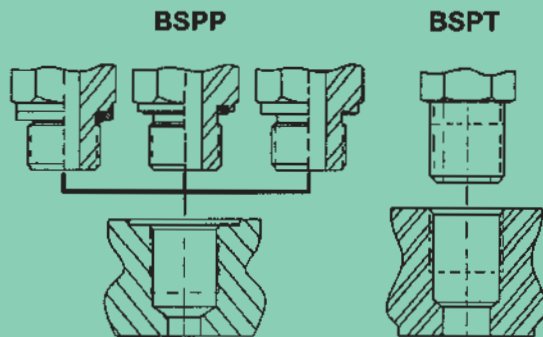


The BSPT (tapered) connection is similar to the NPT except that the thread pitches are different in most sizes. To achieve full pressure rating, a tapered male must be threaded into a tapered female.

Dash Size	Inch Size	Thread	Male Thread O.D.		Female Thread I.D.	
			mm	in	mm	in
-2	1/8	1/8 - 28	9.4	.37	8.1	.32
-4	1/4	1/4 - 19	13.7	.53	12.4	.49
-6	3/8	3/8 - 19	17.2	.68	16.0	.62
-8	1/2	1/2 - 14	21.5	.84	19.8	.77
-10	5/8	5/8 - 14	23.1	.91	20.6	.81
-12	3/4	3/4 - 14	26.9	1.06	25.4	1.00
-16	1	1 - 11	34.0	1.34	31.8	1.25
-20	1 1/4	1 1/4 - 11	42.6	1.68	40.4	1.59
-24	1 1/2	1 1/2 - 11	48.5	1.90	46.2	1.81
-32	2	2	60.4	2.37	58.2	2.29

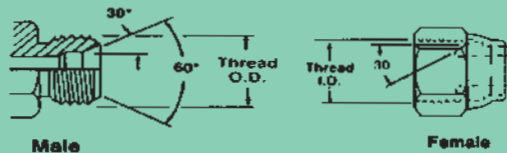

The BSPP (parallel) male is similar to the NPSM male except the thread pitches are different in most sizes. The mating female swivel is a BSP globe seal, which seals on the cone of the male.

JAPANESE Metric and British JIS 30° Flare

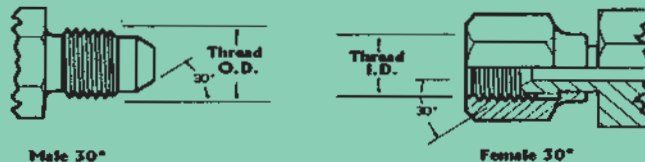

METRIC

Dash No.	Metric Size Equiv.	Metric Thread	Male Thread O.D.		Female Thread I.D.	
			mm	in	mm	in
-4		M14x1.5	14	.55	12.5	
-6	9	M18x1.5	18	.71	16.5	.65
-8	12	M22x1.5	22	.87	20.5	.82
-10	16	M24x1.5	24	.94	22.5	.88
-12	19	M30x1.5	30	1.18	28.5	1.12
-16	25	M33x1.5	33	1.30	31.5	1.24
-20	32	M36x1.5	36	1.42	34.5	1.36
-24	38	M42x1.5	42	1.65	40.5	1.59

METRIC

Used extensively on Komatsu equipment this 30° flare connector has parallel metric threads and is sometimes confused with JIS 30° flare which has BSPP threads.


BSPP

This Japanese connector is similar to the American 37° JIC flare except for the 30° seat angle. The straight (parallel) threads are the same as BSPP.

BSPP

Dash Size	Inch Size	Thread	Male Thread O.D.		Female Thread I.D.	
			mm	in	mm	in
-2	1/8	1/8 - 28	9.4	.37	8.1	.32
-4	1/4	1/4 - 19	13.7	.53	12.4	.49
-6	3/8	3/8 - 19	17.2	.68	16.0	.62
-8	1/2	1/2 - 14	21.5	.84	19.8	.77
-10	5/8	5/8 - 14	23.1	.91	20.6	.81
-12	3/4	3/4 - 14	26.9	1.06	25.4	1.00
-16	1	1 - 11	34.0	1.34	31.8	1.25
-20	1 1/4	1 1/4 - 11	42.6	1.68	40.4	1.59
-24	1 1/2	1 1/2 - 11	48.5	1.90	46.2	1.81
-32	2	2	60.4	2.37	58.2	2.29

DIGITAL CALIPER

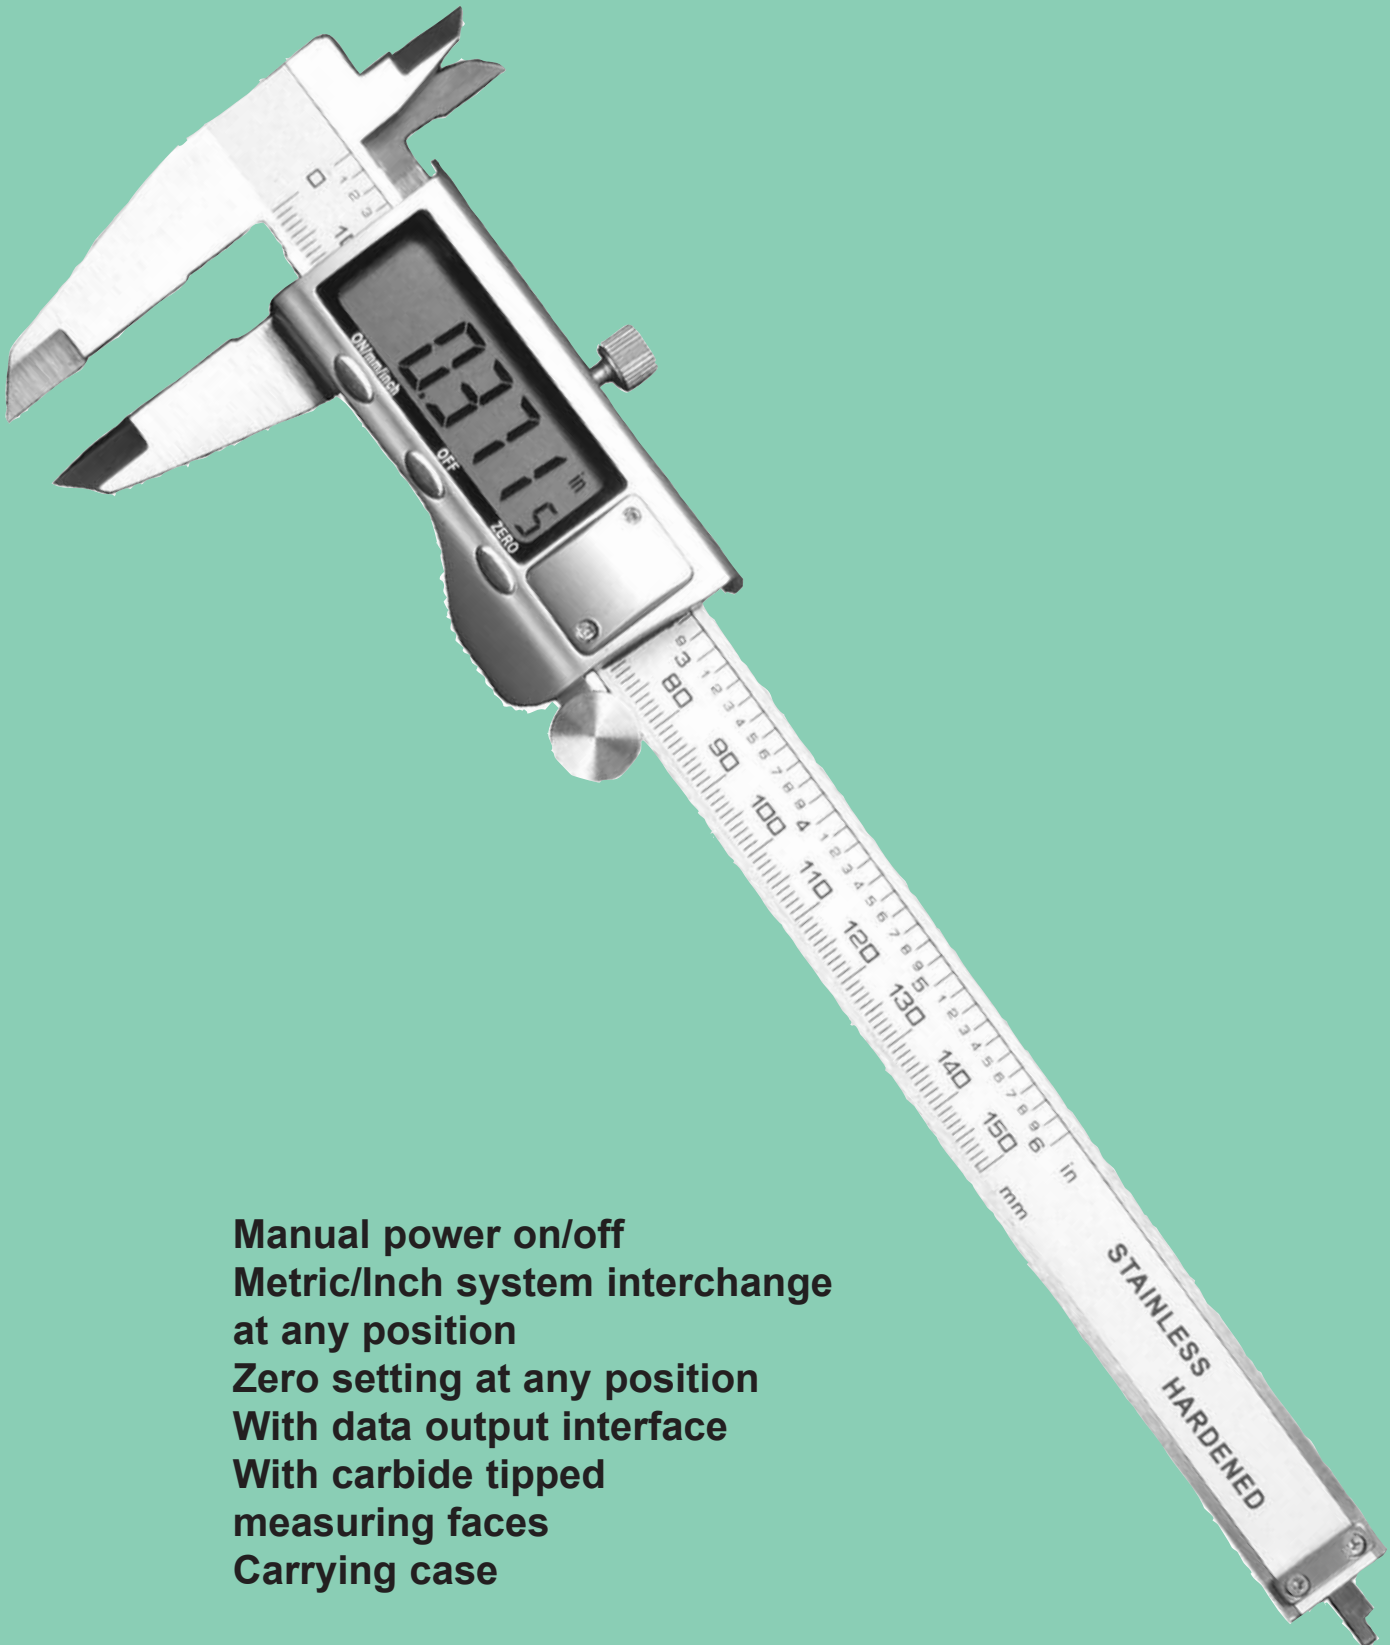

Manual power on/off
Metric/Inch system interchange
at any position
Zero setting at any position
With data output interface
With carbide tipped
measuring faces
Carrying case

List price \$195.65

THREAD IDENTIFICATION KIT



Thread Identification Kit for male and female threads includes:

1/8-28 BSP through 2-11 BSP thread gauges
M8 x 1.0 through M52 x2.0 metric thread gauges
Thread and Port Guide

This kit includes carrying case and 31 dual threaded gauges that allow you to identify BSP and Metric threads quickly. Fittings Unlimited, Inc. also carries optional Digital Calipers.

Metric ID kit 31pieces and box
List price \$1486.25

BRITISH PARALLEL PIPE

Styles may vary from picture



BPP-0304-C

Fem. BPP Swivel Cap

BPP-0304-C-02
BPP-0304-C-04
BPP-0304-C-06
BPP-0304-C-08
BPP-0304-C-10
BPP-0304-C-12
BPP-0304-C-16
BPP-0304-C-20
BPP-0304-C-24
BPP-0304-C-32



BPP-0306

Bulkhead Lock Nut

BPP-0306-02
BPP-0306-04
BPP-0306-06
BPP-0306-08
BPP-0306-10
BPP-0306-12
BPP-0306-16
BPP-0306-20
BPP-0306-24
BPP-0306-32



BPP-1404-Str.

(1) Male BPP
(2) Fem. BPP Swivel

BPP-1404-02-02
BPP-1404-02-04
BPP-1404-04-02
BPP-1404-04-04
BPP-1404-04-06
BPP-1404-04-08
BPP-1404-06-02
BPP-1404-06-04
BPP-1404-06-06
BPP-1404-06-08
BPP-1404-06-12


BPP-1404-08-04
BPP-1404-08-06
BPP-1404-08-08
BPP-1404-08-10
BPP-1404-08-12
BPP-1404-08-16
BPP-1404-10-06
BPP-1404-10-08
BPP-1404-10-10
BPP-1404-10-12
BPP-1404-12-06
BPP-1404-12-08
BPP-1404-12-10
BPP-1404-12-12
BPP-1404-12-16
BPP-1404-12-20
BPP-1404-16-08
BPP-1404-16-10
BPP-1404-16-12
BPP-1404-16-16
BPP-1404-16-20
BPP-1404-16-24
BPP-1404-20-12
BPP-1404-20-16
BPP-1404-20-20
BPP-1404-20-24
BPP-1404-20-32
BPP-1404-24-16
BPP-1404-24-20
BPP-1404-24-24
BPP-1404-24-32
BPP-1404-32-24
BPP-1404-32-32



BPP-1406-Str.

(1) (2) Fem. BPP Swivel


BPP-1406-02-02
BPP-1406-04-02
BPP-1406-04-04
BPP-1406-06-04
BPP-1406-06-06
BPP-1406-08-04
BPP-1406-08-06
BPP-1406-08-08
BPP-1406-10-08
BPP-1406-10-10
BPP-1406-12-04
BPP-1406-12-06
BPP-1406-12-08
BPP-1406-12-10
BPP-1406-12-12
BPP-1406-16-08
BPP-1406-16-10
BPP-1406-16-12
BPP-1406-16-16
BPP-1406-20-16
BPP-1406-20-20
BPP-1406-24-24
BPP-1406-32-32



BPP-1501-90°

(1) Male BPP
(2) Fem. BPP Swivel

BPP-1501-02-02
BPP-1501-04-04
BPP-1501-04-06
BPP-1501-06-04
BPP-1501-06-06
BPP-1501-06-08
BPP-1501-08-06
BPP-1501-08-08
BPP-1501-10-10
BPP-1501-12-12
BPP-1501-16-12
BPP-1501-16-16
BPP-1501-20-20
BPP-1501-24-24
BPP-1501-32-32




BPP-1501-L-90°

(1) Male BPP
(2) Fem. BPP Swivel - Long

BPP-1501-L-04-04
BPP-1501-L-06-06
BPP-1501-L-08-08
BPP-1501-L-10-10
BPP-1501-L-12-12
BPP-1501-L-16-16
BPP-1501-L-20-20
BPP-1501-L-24-24
BPP-1501-L-32-32

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-1503-L - 45°

(1) Male BPP
(2) Fem. BPP Swivel - Long


BPP-1503-L-04-04
BPP-1503-L-06-06
BPP-1503-L-08-08
BPP-1503-L-10-10
BPP-1503-L-12-12
BPP-1503-L-16-16
BPP-1503-L-20-20
BPP-1503-L-24-24



BPP-1506 - 90°

(1) (2) Fem. BPP Swivel


BPP-1506-02-02
BPP-1506-04-04
BPP-1506-06-06
BPP-1506-08-08
BPP-1506-10-10
BPP-1506-12-12
BPP-1506-16-16
BPP-1506-20-20
BPP-1506-24-24
BPP-1506-32-32



BPP-1506-L - 90°

(1) (2) Fem. BPP Swivel - Long


BPP-1506-L-04-04
BPP-1506-L-06-06
BPP-1506-L-08-08
BPP-1506-L-10-10
BPP-1506-L-12-12
BPP-1506-L-16-16
BPP-1506-L-20-20
BPP-1506-L-24-24



BPP-1514-L - 45°

(1) (2) Fem. BPP Swivel - Long


BPP-1514-L-04-04
BPP-1514-L-06-06
BPP-1514-L-08-08
BPP-1514-L-10-10
BPP-1514-L-12-12
BPP-1514-L-16-16
BPP-1514-L-20-20



BPP-1603 - Tee

(1) (2) (3) Fem. BPP Swivel


BPP-1603-02-02-02
BPP-1603-04-04-04
BPP-1603-06-06-06
BPP-1603-08-08-08
BPP-1603-10-10-10
BPP-1603-12-12-12
BPP-1603-16-16-16
BPP-1603-20-20-20
BPP-1603-24-24-24
BPP-1603-32-32-32



BPP-1652 - Cross

(1) (2) (3) (4) Fem. BPP Swivel


BPP-1652-04-04-04-04
BPP-1652-06-06-06-06
BPP-1652-08-08-08-08
BPP-1652-10-10-10-10
BPP-1652-12-12-12-12
BPP-1652-16-16-16-16
BPP-1652-20-20-20-20
BPP-1652-24-24-24-24
BPP-1652-32-32-32-32



BPP-1660 - Tee

(1) (2) Male BPP
(3) Fem. BPP Swivel

BPP-1660-02-02-02
BPP-1660-04-04-04
BPP-1660-06-06-06
BPP-1660-08-08-08
BPP-1660-10-10-10
BPP-1660-12-12-12
BPP-1660-16-16-16
BPP-1660-20-20-20
BPP-1660-24-24-24
BPP-1660-32-32-32




BPP-1662 - Tee

(1) (3) Male BPP
(2) Fem. BPP Swivel

BPP-1662-02-02-02
BPP-1662-04-04-04
BPP-1662-06-06-06
BPP-1662-08-08-08
BPP-1662-10-10-10
BPP-1662-12-12-12
BPP-1662-16-16-16
BPP-1662-20-20-20
BPP-1662-24-24-24
BPP-1662-32-32-32

BRITISH PARALLEL PIPE

Styles may vary from picture



BPP-1663 - Tee

(1) Male BPP
(2) (3) Fem. BPP Swivel

BPP-1663-02-02-02
BPP-1663-04-04-04
BPP-1663-06-06-06
BPP-1663-08-08-08
BPP-1663-10-10-10
BPP-1663-12-12-12
BPP-1663-16-16-16
BPP-1663-20-20-20



BPP-4000

O-Ring (use w/ retainer washer)

BPP-4000-02
BPP-4000-04
BPP-4000-06
BPP-4000-08
BPP-4000-10
BPP-4000-12
BPP-4000-16
BPP-4000-20
BPP-4000-24



BPP-4000-EO

Reflex Seal


BPP-4000-EO-02
BPP-4000-EO-04
BPP-4000-EO-06
BPP-4000-EO-08
BPP-4000-EO-12
BPP-4000-EO-16
BPP-4000-EO-20
BPP-4000-EO-24



BPP-5000 - Str.

(1) (2) Fem. BPP

BPP-5000-02-02
BPP-5000-04-02
BPP-5000-04-04
BPP-5000-06-02
BPP-5000-06-04
BPP-5000-06-06
BPP-5000-08-04
BPP-5000-08-06
BPP-5000-08-08
BPP-5000-10-08
BPP-5000-10-10
BPP-5000-12-04
BPP-5000-12-06
BPP-5000-12-08
BPP-5000-12-10
BPP-5000-12-12
BPP-5000-16-06
BPP-5000-16-08
BPP-5000-16-12
BPP-5000-16-16
BPP-5000-20-08
BPP-5000-20-12
BPP-5000-20-16
BPP-5000-20-20
BPP-5000-24-16
BPP-5000-24-20
BPP-5000-24-24
BPP-5000-32-24
BPP-5000-32-32




BPP-5404 - Str.

(1) (2) Male BPP

BPP-5404-02-02
BPP-5404-04-02
BPP-5404-04-04
BPP-5404-06-02
BPP-5404-06-04
BPP-5404-06-06
BPP-5404-08-02
BPP-5404-08-04
BPP-5404-08-06
BPP-5404-08-08
BPP-5404-10-04
BPP-5404-10-06
BPP-5404-10-08
BPP-5404-10-10
BPP-5404-12-04
BPP-5404-12-06
BPP-5404-12-08
BPP-5404-12-10
BPP-5404-12-12
BPP-5404-16-04
BPP-5404-16-06
BPP-5404-16-08
BPP-5404-16-10
BPP-5404-16-12
BPP-5404-16-16
BPP-5404-20-06
BPP-5404-20-08
BPP-5404-20-10
BPP-5404-20-12
BPP-5404-20-16
BPP-5404-20-20
BPP-5404-24-08
BPP-5404-24-10
BPP-5404-24-12
BPP-5404-24-16
BPP-5404-24-20
BPP-5404-24-24
BPP-5404-32-12
BPP-5404-32-16
BPP-5404-32-20
BPP-5404-32-24
BPP-5404-32-32
BPP-5404-40-24
BPP-5404-40-32
BPP-5404-40-40
BPP-5404-48-32
BPP-5404-48-40
BPP-5404-48-48

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-5404-BH-LN - Str.

(1) Male BPP
(2) Male BPP Bulkhead w/ locknut

BPP-5404-BH-LN-02-02
BPP-5404-BH-LN-04-04
BPP-5404-BH-LN-04-06
BPP-5404-BH-LN-06-06
BPP-5404-BH-LN-06-08
BPP-5404-BH-LN-08-06
BPP-5404-BH-LN-08-08
BPP-5404-BH-LN-08-12
BPP-5404-BH-LN-10-10
BPP-5404-BH-LN-12-06
BPP-5404-BH-LN-12-08
BPP-5404-BH-LN-12-12
BPP-5404-BH-LN-12-16
BPP-5404-BH-LN-16-12
BPP-5404-BH-LN-16-16
BPP-5404-BH-LN-20-20
BPP-5404-BH-LN-24-24
BPP-5404-BH-LN-32-32




***BPP-5405 - Str.**

(1) Male BPP
(2) Fem. BPP

BPP-5405-02-02
BPP-5405-02-04
BPP-5405-02-06
BPP-5405-04-02
BPP-5405-04-04
BPP-5405-04-06
BPP-5405-04-08
BPP-5405-04-12
BPP-5405-06-04
BPP-5405-06-06
BPP-5405-06-08
BPP-5405-06-12
BPP-5405-08-06
BPP-5405-08-08
BPP-5405-08-10
BPP-5405-08-12
BPP-5405-08-16
BPP-5405-08-20
BPP-5405-10-08
BPP-5405-10-10
BPP-5405-10-12
BPP-5405-12-08

BPP-5405-12-10
BPP-5405-12-12
BPP-5405-12-16
BPP-5405-12-20
BPP-5405-12-24
BPP-5405-16-12
BPP-5405-16-16
BPP-5405-16-20
BPP-5405-16-24
BPP-5405-16-32
BPP-5405-20-16
BPP-5405-20-20
BPP-5405-20-24
BPP-5405-20-32
BPP-5405-24-20
BPP-5405-24-24
BPP-5405-24-32
BPP-5405-32-24
BPP-5405-32-32




***BPP-5406 - Str. Bushing**

(1) Male BPP
(2) Fem. BPP

BPP-5406-06-02
BPP-5406-08-02
BPP-5406-08-04
BPP-5406-10-06
BPP-5406-12-04
BPP-5406-12-06
BPP-5406-16-04
BPP-5406-16-06
BPP-5406-16-08
BPP-5406-20-08
BPP-5406-20-12
BPP-5406-20-16
BPP-5406-24-08
BPP-5406-24-12
BPP-5406-24-16
BPP-5406-32-12
BPP-5406-32-16
BPP-5406-32-20
BPP-5406-32-24


* Some BPP may not be Chamfer



BPP-5500 - 90°

(1) (2) Male BPP


BPP-5500-02-02
BPP-5500-04-04
BPP-5500-06-04
BPP-5500-06-06
BPP-5500-08-06
BPP-5500-08-08
BPP-5500-10-10
BPP-5500-12-08
BPP-5500-12-12
BPP-5500-16-12
BPP-5500-16-16
BPP-5500-20-20
BPP-5500-24-24
BPP-5500-32-32



BPP-5502 - 90°

(1) Male BPP
(2) Fem. BPP

BPP-5502-02-02
BPP-5502-04-04
BPP-5502-06-06
BPP-5502-08-08
BPP-5502-10-10
BPP-5502-12-12
BPP-5502-16-16




BPP-5504 - 90°

(1) (2) Fem. BPP

BPP-5504-02-02
BPP-5504-04-04
BPP-5504-06-06
BPP-5504-08-08
BPP-5504-10-10
BPP-5504-12-12
BPP-5504-16-16


BRITISH PARALLEL PIPE

Styles may vary from picture




BPP-5505 - 45°
(1) (2) Fem. BPP

BPP-5505-02-02
BPP-5505-04-04
BPP-5505-06-06
BPP-5505-08-08
BPP-5505-10-10
BPP-5505-12-12




BPP-5600 - Tee
(1) (2) (3) Male BPP

BPP-5600-02-02-02
BPP-5600-04-04-04
BPP-5600-06-06-06
BPP-5600-08-08-08
BPP-5600-10-10-10
BPP-5600-12-12-12
BPP-5600-16-16-16
BPP-5600-20-20-20
BPP-5600-24-24-24
BPP-5600-32-32-32

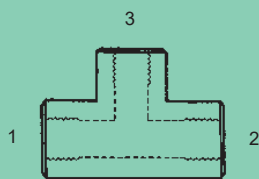


BPP-5605 - Tee
(1) (2) (3) Fem. BPP

BPP-5605-02-02-02
BPP-5605-04-04-04
BPP-5605-06-06-06
BPP-5605-08-08-08
BPP-5605-10-10-10
BPP-5605-12-12-12
BPP-5605-16-16-16



BPP-6000
BPP Retainer Washer

BPP-6000-02
BPP-6000-04
BPP-6000-06
BPP-6000-08
BPP-6000-10
BPP-6000-12
BPP-6000-16
BPP-6000-20
BPP-6000-24
BPP-6000-32




BPP-6000-C
Copper Crush Washer

BPP-6000-C-02
BPP-6000-C-04
BPP-6000-C-06
BPP-6000-C-08
BPP-6000-C-10
BPP-6000-C-12
BPP-6000-C-16
BPP-6000-C-20
BPP-6000-C-24
BPP-6000-C-32




BPP-6001
BPP Bonded Seal

BPP-6001-02
BPP-6001-04
BPP-6001-06
BPP-6001-08
BPP-6001-10
BPP-6001-12
BPP-6001-16
BPP-6001-20
BPP-6001-24
BPP-6001-32
BPP-6001-40
BPP-6001-48

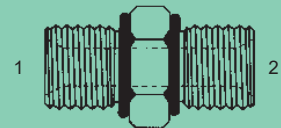

BPP-6403-EO - Str.
(1) Male BPP w/ Peflex Seal
(2) Male BPP w/ Peflex Seal

BPP-6403-02-02-EO
BPP-6403-04-04-EO
BPP-6403-06-06-EO
BPP-6403-08-08-EO
BPP-6403-12-12-EO
BPP-6403-16-16-EO
BPP-6403-20-20-EO
BPP-6403-24-24-EO




BPP-6408
(1) Male BPP Plug

BPP-6408-02
BPP-6408-04
BPP-6408-06
BPP-6408-08
BPP-6408-10
BPP-6408-12
BPP-6408-16
BPP-6408-20
BPP-6408-24
BPP-6408-32
BPP-6408-40
BPP-6408-48

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-6408-HHP-EO - Str.

(1) Male BPP Hollow Hex Plug
w/ Peflex Seal


BPP-6408-HHP-02-EO
BPP-6408-HHP-04-EO
BPP-6408-HHP-06-EO
BPP-6408-HHP-08-EO
BPP-6408-HHP-12-EO
BPP-6408-HHP-16-EO
BPP-6408-HHP-20-EO
BPP-6408-HHP-24-EO



BPP-6410-EO - Str.

(1) Male BPP w/ Peflex Seal
(2) Fem. BPP


BPP-6410-02-04-EO
BPP-6410-02-06-EO
BPP-6410-04-02-EO
BPP-6410-04-06-EO
BPP-6410-04-08-EO
BPP-6410-04-12-EO
BPP-6410-06-02-EO
BPP-6410-06-04-EO
BPP-6410-06-08-EO
BPP-6410-06-12-EO
BPP-6410-08-02-EO
BPP-6410-08-04-EO
BPP-6410-08-06-EO
BPP-6410-08-12-EO
BPP-6410-08-16-EO
BPP-6410-08-20-EO
BPP-6410-12-04-EO
BPP-6410-12-06-EO
BPP-6410-12-08-EO
BPP-6410-12-16-EO
BPP-6410-12-20-EO
BPP-6410-16-04-EO
BPP-6410-16-06-EO
BPP-6410-16-08-EO
BPP-6410-16-12-EO
BPP-6410-16-20-EO
BPP-6410-16-24-EO
BPP-6410-20-08-EO
BPP-6410-20-12-EO
BPP-6410-20-16-EO
BPP-6410-20-24-EO
BPP-6410-24-08-EO
BPP-6410-24-12-EO
BPP-6410-24-16-EO
BPP-6410-24-20-EO
BPP-6410-32-24-EO



BPP-7801-NW0 - 90°

(1) Male BPP
(2) Male BPP Adj. O-Ring


BPP-7801-02-02-NW0
BPP-7801-04-04-NW0
BPP-7801-04-06-NW0
BPP-7801-06-04-NW0
BPP-7801-06-06-NW0
BPP-7801-08-06-NW0
BPP-7801-08-08-NW0
BPP-7801-12-12-NW0
BPP-7801-16-16-NW0



BPP-7802-NW0 - 45°

(1) Male BPP
(2) Male BPP Adj. O-Ring


BPP-7802-04-04-NW0
BPP-7802-06-04-NW0
BPP-7802-06-06-NW0
BPP-7802-08-06-NW0
BPP-7802-08-08-NW0
BPP-7802-12-12-NW0
BPP-7802-16-16-NW0



BPP-7803-NW0 - Tee

(1) (2) Male BPP
(3) Male BPP Adj. O-Ring


BPP-7803-04-04-04-NW0
BPP-7803-06-06-04-NW0
BPP-7803-06-06-06-NW0
BPP-7803-08-08-06-NW0
BPP-7803-08-08-08-NW0
BPP-7803-12-12-12-NW0
BPP-7803-16-16-16-NW0



BPP-7804-NW0 - Tee

(1) (3) Male BPP
(2) Male BPP Adj. O-Ring

BPP-7804-04-04-04-NW0
BPP-7804-06-06-04-NW0
BPP-7804-06-06-06-NW0
BPP-7804-08-08-06-NW0
BPP-7804-08-08-08-NW0
BPP-7804-12-12-12-NW0
BPP-7804-16-16-16-NW0



BPP-BST-5404 - Str.


(1) Male BPP
(2) Male BSPT

BPP-BST-5404-02-02
BPP-BST-5404-02-04
BPP-BST-5404-02-06
BPP-BST-5404-02-08
BPP-BST-5404-04-02
BPP-BST-5404-04-04
BPP-BST-5404-04-06
BPP-BST-5404-04-08
BPP-BST-5404-06-02
BPP-BST-5404-06-04
BPP-BST-5404-06-06
BPP-BST-5404-06-08
BPP-BST-5404-06-12
BPP-BST-5404-06-16
BPP-BST-5404-08-02
BPP-BST-5404-08-04
BPP-BST-5404-08-06
BPP-BST-5404-08-08
BPP-BST-5404-08-10
BPP-BST-5404-08-12
BPP-BST-5404-08-16
BPP-BST-5404-10-04
BPP-BST-5404-10-06
BPP-BST-5404-10-08
BPP-BST-5404-10-10
BPP-BST-5404-10-12
BPP-BST-5404-10-16
BPP-BST-5404-12-04
BPP-BST-5404-12-06
BPP-BST-5404-12-08
BPP-BST-5404-12-12
BPP-BST-5404-12-16
BPP-BST-5404-12-20
BPP-BST-5404-16-04
BPP-BST-5404-16-06
BPP-BST-5404-16-08

BRITISH PARALLEL PIPE

Styles may vary from picture


BPP-BST-5404-16-12
BPP-BST-5404-16-16
BPP-BST-5404-16-20
BPP-BST-5404-16-24
BPP-BST-5404-16-32
BPP-BST-5404-20-12
BPP-BST-5404-20-16
BPP-BST-5404-20-20
BPP-BST-5404-20-24
BPP-BST-5404-20-32
BPP-BST-5404-24-12
BPP-BST-5404-24-16
BPP-BST-5404-24-20
BPP-BST-5404-24-24
BPP-BST-5404-24-32
BPP-BST-5404-32-16
BPP-BST-5404-32-20
BPP-BST-5404-32-24
BPP-BST-5404-32-32
BPP-BST-5404-40-40
BPP-BST-5404-48-48



BPP-BST-5500 - 90°

(1) Male BPP
(2) Male BSPT


BPP-BST-5500-02-02
BPP-BST-5500-04-04
BPP-BST-5500-06-04
BPP-BST-5500-06-06
BPP-BST-5500-06-08
BPP-BST-5500-08-06
BPP-BST-5500-08-08
BPP-BST-5500-10-10
BPP-BST-5500-12-12
BPP-BST-5500-16-12
BPP-BST-5500-16-16



BPP-BST-5501 - 45°

(1) Male BPP
(2) Male BSPT


BPP-BST-5501-04-02
BPP-BST-5501-04-04
BPP-BST-5501-04-06
BPP-BST-5501-06-04
BPP-BST-5501-06-06
BPP-BST-5501-08-06
BPP-BST-5501-08-08
BPP-BST-5501-12-12
BPP-BST-5501-16-16



BPP-FB-6410 - Str.

(1) Male BPP
(2) Fem. O-Ring


BPP-FB-6410-02-04
BPP-FB-6410-04-04
BPP-FB-6410-06-06
BPP-FB-6410-08-08
BPP-FB-6410-08-10
BPP-FB-6410-12-12
BPP-FB-6410-16-16



BPP-FB-6410-WO - Str.

(1) Male BPP w/ Washer O-ring
(2) Fem. O-Ring


BPP-FB-6410-02-04-WO
BPP-FB-6410-04-02-WO
BPP-FB-6410-04-04-WO
BPP-FB-6410-04-06-WO
BPP-FB-6410-06-04-WO
BPP-FB-6410-06-06-WO
BPP-FB-6410-06-08-WO
BPP-FB-6410-08-06-WO
BPP-FB-6410-08-08-WO
BPP-FB-6410-12-06-WO
BPP-FB-6410-12-08-WO
BPP-FB-6410-12-10-WO
BPP-FB-6410-12-12-WO
BPP-FB-6410-12-16-WO
BPP-FB-6410-16-12-WO
BPP-FB-6410-16-16-WO
BPP-FB-6410-20-20-WO
BPP-FB-6410-24-24-WO



BPP-FBST-1405 - Str.

(1) Fem. BSPT
(2) Fem. BPP Swivel


BPP-FBST-1405-04-04
BPP-FBST-1405-06-06
BPP-FBST-1405-08-08
BPP-FBST-1405-12-12
BPP-FBST-1405-16-16



BPP-FBST-5405 - Str.

(1) Male BPP
(2) Fem. BSPT

BPP-FBST-5405-04-04
BPP-FBST-5405-06-06
BPP-FBST-5405-08-08
BPP-FBST-5405-12-08
BPP-FBST-5405-12-12
BPP-FBST-5405-16-16




BPP-FJX-6402-DS - Str.

(1) 37° Fem. Swivel
(2) Male BPP w/ Bonded Seal

BPP-FJX-6402-04-02-DS
BPP-FJX-6402-04-04-DS
BPP-FJX-6402-04-06-DS
BPP-FJX-6402-05-04-DS
BPP-FJX-6402-06-04-DS
BPP-FJX-6402-06-06-DS
BPP-FJX-6402-06-08-DS
BPP-FJX-6402-08-04-DS
BPP-FJX-6402-08-06-DS
BPP-FJX-6402-08-08-DS
BPP-FJX-6402-08-10-DS
BPP-FJX-6402-08-12-DS
BPP-FJX-6402-10-06-DS
BPP-FJX-6402-10-08-DS
BPP-FJX-6402-10-10-DS
BPP-FJX-6402-10-12-DS
BPP-FJX-6402-12-08-DS
BPP-FJX-6402-12-12-DS
BPP-FJX-6402-12-16-DS
BPP-FJX-6402-14-12-DS
BPP-FJX-6402-16-16-DS
BPP-FJX-6402-20-16-DS
BPP-FJX-6402-20-20-DS
BPP-FJX-6402-24-24-DS


BRITISH PARALLEL PIPE

Styles may vary from picture




BPP-FJX-6402-EO - Str.
(1) 37° Fem. Swivel
(2) Male BPP w/ Peflex Seal

BPP-FJX-6402-04-02-EO
BPP-FJX-6402-04-04-EO
BPP-FJX-6402-04-06-EO
BPP-FJX-6402-05-04-EO
BPP-FJX-6402-06-04-EO
BPP-FJX-6402-06-06-EO
BPP-FJX-6402-08-04-EO
BPP-FJX-6402-08-06-EO
BPP-FJX-6402-08-08-EO
BPP-FJX-6402-10-06-EO
BPP-FJX-6402-10-08-EO
BPP-FJX-6402-12-08-EO
BPP-FJX-6402-12-12-EO
BPP-FJX-6402-16-16-EO
BPP-FJX-6402-20-16-EO
BPP-FJX-6402-20-20-EO
BPP-FJX-6402-24-20-EO
BPP-FJX-6402-24-24-EO
BPP-FJX-6402-32-32-EO




BPP-FJX-6402-WO - Str.
(1) 37° Fem. Swivel
(2) Male BPP w/ Washer O-Ring

BPP-FJX-6402-04-02-WO
BPP-FJX-6402-04-04-WO
BPP-FJX-6402-05-04-WO
BPP-FJX-6402-06-04-WO
BPP-FJX-6402-06-06-WO
BPP-FJX-6402-08-06-WO
BPP-FJX-6402-10-08-WO
BPP-FJX-6402-12-12-WO
BPP-FJX-6402-16-16-WO
BPP-FJX-6402-20-20-WO
BPP-FJX-6402-24-24-WO



BPP-FJX-6501 - 90°
(1) 37° Fem. Swivel
(2) Male BPP

BPP-FJX-6501-04-04
BPP-FJX-6501-06-06
BPP-FJX-6501-06-08
BPP-FJX-6501-08-06
BPP-FJX-6501-08-08
BPP-FJX-6501-10-08
BPP-FJX-6501-12-12




BPP-FJX-6505 - Str.
(1) 37° Fem. Swivel
(2) Male BPP

BPP-FJX-6505-04-02
BPP-FJX-6505-04-04
BPP-FJX-6505-04-06
BPP-FJX-6505-05-04
BPP-FJX-6505-06-02
BPP-FJX-6505-06-04
BPP-FJX-6505-06-06
BPP-FJX-6505-06-08
BPP-FJX-6505-08-04
BPP-FJX-6505-08-06
BPP-FJX-6505-08-08
BPP-FJX-6505-08-10
BPP-FJX-6505-08-12
BPP-FJX-6505-10-06
BPP-FJX-6505-10-08
BPP-FJX-6505-10-10
BPP-FJX-6505-10-12
BPP-FJX-6505-12-08
BPP-FJX-6505-12-12
BPP-FJX-6505-12-16
BPP-FJX-6505-14-12
BPP-FJX-6505-16-12
BPP-FJX-6505-16-16
BPP-FJX-6505-20-16
BPP-FJX-6505-20-20
BPP-FJX-6505-24-24
BPP-FJX-6505-32-32



BPP-FJX-6565 - Str.
(1) 37° Fem. Swivel
(2) Fem. BPP Swivel

BPP-FJX-6565-04-04
BPP-FJX-6565-04-06
BPP-FJX-6565-05-04
BPP-FJX-6565-05-06
BPP-FJX-6565-06-04
BPP-FJX-6565-06-06
BPP-FJX-6565-06-08
BPP-FJX-6565-08-06
BPP-FJX-6565-08-08
BPP-FJX-6565-08-12
BPP-FJX-6565-10-08
BPP-FJX-6565-10-10
BPP-FJX-6565-10-12
BPP-FJX-6565-12-12
BPP-FJX-6565-16-12
BPP-FJX-6565-16-16
BPP-FJX-6565-16-20
BPP-FJX-6565-20-16
BPP-FJX-6565-20-20
BPP-FJX-6565-24-24
BPP-FJX-6565-32-32




BPP-FOFS-6510 - Str.
(1) Male BPP
(2) Fem. O-Ring Face Seal Swivel (SAE)

BPP-FOFS-6510-02-04
BPP-FOFS-6510-04-04
BPP-FOFS-6510-04-06
BPP-FOFS-6510-06-06
BPP-FOFS-6510-06-08
BPP-FOFS-6510-08-06
BPP-FOFS-6510-08-08
BPP-FOFS-6510-08-10
BPP-FOFS-6510-08-12
BPP-FOFS-6510-12-12

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-FP-5000 - Str.

(1) Fem. BPP
(2) Fem. Pipe


BPP-FP-5000-04-04
BPP-FP-5000-06-06
BPP-FP-5000-08-08
BPP-FP-5000-10-08
BPP-FP-5000-12-12
BPP-FP-5000-16-16
BPP-FP-5000-20-20
BPP-FP-5000-24-24
BPP-FP-5000-32-32
BPP-FP-5000-40-40
BPP-FP-5000-48-48



BPP-FP-5405 - Str.

(1) Male BPP
(2) Fem. Pipe


BPP-FP-5405-02-02
BPP-FP-5405-02-04
BPP-FP-5405-04-02
BPP-FP-5405-04-04
BPP-FP-5405-04-06
BPP-FP-5405-06-02
BPP-FP-5405-06-04
BPP-FP-5405-06-06
BPP-FP-5405-06-08
BPP-FP-5405-08-02
BPP-FP-5405-08-04
BPP-FP-5405-08-06
BPP-FP-5405-08-08
BPP-FP-5405-12-04
BPP-FP-5405-12-06
BPP-FP-5405-12-08
BPP-FP-5405-12-12
BPP-FP-5405-16-04
BPP-FP-5405-16-06
BPP-FP-5405-16-08
BPP-FP-5405-16-12
BPP-FP-5405-16-16
BPP-FP-5405-16-20
BPP-FP-5405-20-12
BPP-FP-5405-20-16
BPP-FP-5405-20-20
BPP-FP-5405-24-20
BPP-FP-5405-24-24
BPP-FP-5405-24-32
BPP-FP-5405-32-24
BPP-FP-5405-32-32
BPP-FP-5405-40-32
BPP-FP-5405-40-40
BPP-FP-5405-48-32



BPP-FP-6405-DS - Str.

(1) Male BPP w/ Bonded Seal
(2) Fem. Pipe


BPP-FP-6405-02-02-DS
BPP-FP-6405-02-04-DS
BPP-FP-6405-04-02-DS
BPP-FP-6405-04-04-DS
BPP-FP-6405-04-06-DS
BPP-FP-6405-06-02-DS
BPP-FP-6405-06-04-DS
BPP-FP-6405-06-06-DS
BPP-FP-6405-08-02-DS
BPP-FP-6405-08-04-DS
BPP-FP-6405-08-06-DS
BPP-FP-6405-08-08-DS
BPP-FP-6405-12-04-DS
BPP-FP-6405-12-06-DS
BPP-FP-6405-12-08-DS
BPP-FP-6405-12-12-DS
BPP-FP-6405-16-04-DS
BPP-FP-6405-16-06-DS
BPP-FP-6405-16-08-DS
BPP-FP-6405-16-16-DS
BPP-FP-6405-20-16-DS
BPP-FP-6405-20-20-DS
BPP-FP-6405-24-20-DS
BPP-FP-6405-24-24-DS
BPP-FP-6405-32-24-DS
BPP-FP-6405-32-32-DS
BPP-FP-6405-40-32-DS
BPP-FP-6405-40-40-DS



BPP-FP-6405-WO - Str.

(1) Male BPP w/ Washer O-Ring
(2) Fem. Pipe

BPP-FP-6405-02-02-WO
BPP-FP-6405-02-04-WO
BPP-FP-6405-04-02-WO
BPP-FP-6405-04-04-WO
BPP-FP-6405-04-06-WO
BPP-FP-6405-06-04-WO
BPP-FP-6405-06-06-WO
BPP-FP-6405-06-08-WO
BPP-FP-6405-08-06-WO
BPP-FP-6405-08-08-WO
BPP-FP-6405-12-08-WO
BPP-FP-6405-12-12-WO
BPP-FP-6405-16-16-WO
BPP-FP-6405-20-16-WO
BPP-FP-6405-20-20-WO
BPP-FP-6405-24-24-WO
BPP-FP-6405-32-32-WO




BPP-M-5404 - Str.

(1) Male BPP
(2) Male Metric

BPP-M-5404-02-10X1.0
BPP-M-5404-02-12
BPP-M-5404-02-14
BPP-M-5404-04-08X1.0
BPP-M-5404-04-10
BPP-M-5404-04-12
BPP-M-5404-04-14
BPP-M-5404-04-16
BPP-M-5404-04-18
BPP-M-5404-04-20
BPP-M-5404-04-22
BPP-M-5404-06-12
BPP-M-5404-06-14
BPP-M-5404-06-16
BPP-M-5404-06-18
BPP-M-5404-06-20
BPP-M-5404-06-22
BPP-M-5404-06-24
BPP-M-5404-08-12
BPP-M-5404-08-14
BPP-M-5404-08-16
BPP-M-5404-08-18
BPP-M-5404-08-20
BPP-M-5404-08-22
BPP-M-5404-08-24
BPP-M-5404-08-26
BPP-M-5404-08-27
BPP-M-5404-10-22
BPP-M-5404-10-26
BPP-M-5404-12-16
BPP-M-5404-12-18
BPP-M-5404-12-20
BPP-M-5404-12-22
BPP-M-5404-12-24
BPP-M-5404-12-26
BPP-M-5404-12-27
BPP-M-5404-12-30
BPP-M-5404-16-18
BPP-M-5404-16-22
BPP-M-5404-16-24
BPP-M-5404-16-26
BPP-M-5404-16-27
BPP-M-5404-16-30
BPP-M-5404-16-33
BPP-M-5404-20-30
BPP-M-5404-20-38
BPP-M-5404-20-48
BPP-M-5404-24-38
BPP-M-5404-24-45
BPP-M-5404-32-45
BPP-M-5404-32-52

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-MB-6401-O - Str.

- (1) Male O-Ring (SAE)
(2) Male BPP


BPP-MB-6401-04-04-O
BPP-MB-6401-04-06-O
BPP-MB-6401-05-04-O
BPP-MB-6401-05-06-O
BPP-MB-6401-06-04-O
BPP-MB-6401-06-06-O
BPP-MB-6401-06-08-O
BPP-MB-6401-08-04-O
BPP-MB-6401-08-06-O
BPP-MB-6401-08-08-O
BPP-MB-6401-08-10-O
BPP-MB-6401-08-12-O
BPP-MB-6401-10-06-O
BPP-MB-6401-10-08-O
BPP-MB-6401-10-10-O
BPP-MB-6401-10-12-O
BPP-MB-6401-12-06-O
BPP-MB-6401-12-08-O
BPP-MB-6401-12-10-O
BPP-MB-6401-12-12-O
BPP-MB-6401-12-16-O
BPP-MB-6401-16-12-O
BPP-MB-6401-16-16-O
BPP-MB-6401-16-20-O
BPP-MB-6401-20-12-O
BPP-MB-6401-20-16-O
BPP-MB-6401-20-20-O
BPP-MB-6401-20-24-O
BPP-MB-6401-24-16-O
BPP-MB-6401-24-20-O
BPP-MB-6401-24-24-O



BPP-MB-6803-NWO - Tee

- (1) (2) Male BPP
(3) Male Adj. O-Ring (SAE)


BPP-MB-6803-02-02-04-NWO
BPP-MB-6803-06-06-08-NWO
BPP-MB-6803-08-08-08-NWO
BPP-MB-6803-08-08-10-NWO
BPP-MB-6803-12-12-12-NWO
BPP-MB-6803-16-16-16-NWO



BPP-MB-6804-NWO - Tee

- (1) (3) Male BPP
(2) Male Adj. O-Ring (SAE)

BPP-MB-6804-02-04-02-NWO
BPP-MB-6804-04-06-04-NWO
BPP-MB-6804-06-08-06-NWO
BPP-MB-6804-08-10-08-NWO
BPP-MB-6804-12-12-12-NWO
BPP-MB-6804-16-16-16-NWO



BPP-MB-6806-NWO - Tee

- (1) Male BPP
(2) Male Adj. O-Ring (SAE)


BPP-MB-6806-02-04-NWO
BPP-MB-6806-04-06-NWO
BPP-MB-6806-06-06-NWO
BPP-MB-6806-06-08-NWO
BPP-MB-6806-08-08-NWO
BPP-MB-6806-08-10-NWO
BPP-MB-6806-12-12-NWO
BPP-MB-6806-16-16-NWO



BPP-MBST-1404 - Str.

- (1) Male BSPT
(2) Fem. BPP Swivel

BPP-MBST-1404-02-02
BPP-MBST-1404-04-04
BPP-MBST-1404-06-06
BPP-MBST-1404-08-08
BPP-MBST-1404-12-12
BPP-MBST-1404-16-16
BPP-MBST-1404-20-20
BPP-MBST-1404-24-24




BPP-MBST-1501 - 90°

- (1) Male BSPT
(2) Fem. BPP Swivel

BPP-MBST-1501-04-04
BPP-MBST-1501-06-06
BPP-MBST-1501-08-08
BPP-MBST-1501-12-12
BPP-MBST-1501-16-16

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-MJ-2404 - Str.

- (1) Male 37°
- (2) Male BPP 30° Seat


BPP-MJ-2404-04-02
BPP-MJ-2404-04-04
BPP-MJ-2404-04-06
BPP-MJ-2404-04-08
BPP-MJ-2404-04-12
BPP-MJ-2404-05-02
BPP-MJ-2404-05-04
BPP-MJ-2404-05-06
BPP-MJ-2404-05-08
BPP-MJ-2404-05-12
BPP-MJ-2404-06-02
BPP-MJ-2404-06-04
BPP-MJ-2404-06-06
BPP-MJ-2404-06-08
BPP-MJ-2404-06-10
BPP-MJ-2404-06-12
BPP-MJ-2404-08-04
BPP-MJ-2404-08-06
BPP-MJ-2404-08-08
BPP-MJ-2404-08-10
BPP-MJ-2404-08-12
BPP-MJ-2404-08-16
BPP-MJ-2404-10-04
BPP-MJ-2404-10-06
BPP-MJ-2404-10-08
BPP-MJ-2404-10-10
BPP-MJ-2404-10-12
BPP-MJ-2404-10-16
BPP-MJ-2404-12-06
BPP-MJ-2404-12-08
BPP-MJ-2404-12-10
BPP-MJ-2404-12-12
BPP-MJ-2404-12-16
BPP-MJ-2404-12-20
BPP-MJ-2404-14-08
BPP-MJ-2404-14-12
BPP-MJ-2404-14-16
BPP-MJ-2404-16-06
BPP-MJ-2404-16-08
BPP-MJ-2404-16-10
BPP-MJ-2404-16-12
BPP-MJ-2404-16-16
BPP-MJ-2404-16-20
BPP-MJ-2404-16-24
BPP-MJ-2404-20-12
BPP-MJ-2404-20-16
BPP-MJ-2404-20-20
BPP-MJ-2404-20-24
BPP-MJ-2404-20-32
BPP-MJ-2404-24-16
BPP-MJ-2404-24-20
BPP-MJ-2404-24-24
BPP-MJ-2404-24-32
BPP-MJ-2404-32-16
BPP-MJ-2404-32-20
BPP-MJ-2404-32-24
BPP-MJ-2404-32-32



BPP-MJ-2405 - Str.

- (1) Male 37°
- (2) Fem. BPP (Rigid)


BPP-MJ-2405-04-02
BPP-MJ-2405-04-04
BPP-MJ-2405-04-06
BPP-MJ-2405-05-02
BPP-MJ-2405-05-04
BPP-MJ-2405-06-04
BPP-MJ-2405-06-06
BPP-MJ-2405-08-06
BPP-MJ-2405-08-08
BPP-MJ-2405-10-08
BPP-MJ-2405-12-12
BPP-MJ-2405-16-16
BPP-MJ-2405-20-20
BPP-MJ-2405-24-24
BPP-MJ-2405-32-32



BPP-MJ-2501 - 90°

- (1) Male 37°
- (2) Male BPP 30° Seat

BPP-MJ-2501-04-02
BPP-MJ-2501-04-04
BPP-MJ-2501-06-04
BPP-MJ-2501-06-06
BPP-MJ-2501-08-06
BPP-MJ-2501-08-08
BPP-MJ-2501-12-12
BPP-MJ-2501-16-16
BPP-MJ-2501-20-20
BPP-MJ-2501-24-24
BPP-MJ-2501-32-32




BPP-MJ-6400-DS - Str.

- (1) Male 37°
- (2) Male BPP w/ Bonded Seal

BPP-MJ-6400-04-02-DS
BPP-MJ-6400-04-04-DS
BPP-MJ-6400-04-06-DS
BPP-MJ-6400-04-08-DS
BPP-MJ-6400-04-12-DS
BPP-MJ-6400-05-02-DS
BPP-MJ-6400-05-04-DS
BPP-MJ-6400-05-06-DS
BPP-MJ-6400-05-08-DS
BPP-MJ-6400-06-02-DS
BPP-MJ-6400-06-04-DS
BPP-MJ-6400-06-06-DS
BPP-MJ-6400-06-08-DS
BPP-MJ-6400-06-10-DS
BPP-MJ-6400-06-12-DS
BPP-MJ-6400-08-04-DS
BPP-MJ-6400-08-06-DS
BPP-MJ-6400-08-08-DS
BPP-MJ-6400-08-10-DS
BPP-MJ-6400-08-12-DS
BPP-MJ-6400-08-16-DS
BPP-MJ-6400-10-04-DS
BPP-MJ-6400-10-06-DS
BPP-MJ-6400-10-08-DS
BPP-MJ-6400-10-10-DS
BPP-MJ-6400-10-12-DS
BPP-MJ-6400-10-16-DS
BPP-MJ-6400-12-06-DS
BPP-MJ-6400-12-08-DS
BPP-MJ-6400-12-10-DS
BPP-MJ-6400-12-12-DS
BPP-MJ-6400-12-16-DS
BPP-MJ-6400-12-20-DS
BPP-MJ-6400-14-12-DS
BPP-MJ-6400-14-16-DS
BPP-MJ-6400-16-08-DS
BPP-MJ-6400-16-12-DS
BPP-MJ-6400-16-16-DS
BPP-MJ-6400-16-20-DS
BPP-MJ-6400-16-24-DS
BPP-MJ-6400-20-12-DS
BPP-MJ-6400-20-16-DS
BPP-MJ-6400-20-20-DS
BPP-MJ-6400-20-24-DS
BPP-MJ-6400-24-20-DS
BPP-MJ-6400-24-24-DS
BPP-MJ-6400-24-32-DS
BPP-MJ-6400-32-16-DS
BPP-MJ-6400-32-20-DS
BPP-MJ-6400-32-24-DS
BPP-MJ-6400-32-32-DS

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-MJ-6400-WO - Str.

- (1) Male 37°
- (2) Male BPP w/ Washer O-Ring


BPP-MJ-6400-04-02-WO
BPP-MJ-6400-04-04-WO
BPP-MJ-6400-04-06-WO
BPP-MJ-6400-04-08-WO
BPP-MJ-6400-05-02-WO
BPP-MJ-6400-05-04-WO
BPP-MJ-6400-05-06-WO
BPP-MJ-6400-06-02-WO
BPP-MJ-6400-06-04-WO
BPP-MJ-6400-06-06-WO
BPP-MJ-6400-06-08-WO
BPP-MJ-6400-06-12-WO
BPP-MJ-6400-08-04-WO
BPP-MJ-6400-08-06-WO
BPP-MJ-6400-08-08-WO
BPP-MJ-6400-08-12-WO
BPP-MJ-6400-10-06-WO
BPP-MJ-6400-10-08-WO
BPP-MJ-6400-10-12-WO
BPP-MJ-6400-10-16-WO
BPP-MJ-6400-12-06-WO
BPP-MJ-6400-12-08-WO
BPP-MJ-6400-12-10-WO
BPP-MJ-6400-12-12-WO
BPP-MJ-6400-12-16-WO
BPP-MJ-6400-12-20-WO
BPP-MJ-6400-14-12-WO
BPP-MJ-6400-14-16-WO
BPP-MJ-6400-16-12-WO
BPP-MJ-6400-16-16-WO
BPP-MJ-6400-16-20-WO
BPP-MJ-6400-16-24-WO
BPP-MJ-6400-20-16-WO
BPP-MJ-6400-20-20-WO
BPP-MJ-6400-20-24-WO
BPP-MJ-6400-24-20-WO
BPP-MJ-6400-24-24-WO



BPP-MJ-6400-L-WO - Str.

- (1) Male 37°
- (2) Male BPP - Long w/ Washer & O-Ring


BPP-MJ-6400-L-06-04-WO
BPP-MJ-6400-L-08-06-WO
BPP-MJ-6400-L-08-08-WO
BPP-MJ-6400-L-10-08-WO
BPP-MJ-6400-L-12-12-WO
BPP-MJ-6400-L-12-16-WO
BPP-MJ-6400-L-16-16-WO
BPP-MJ-6400-L-20-20-WO



BPP-MJ-6500 - 90°

- (1) Male 37°
- (2) Fem. BPP Swivel


BPP-MJ-6500-04-04
BPP-MJ-6500-06-06
BPP-MJ-6500-08-08
BPP-MJ-6500-12-12
BPP-MJ-6500-16-16



BPP-MJ-6500-L - 90°

- (1) Male 37°
- (2) Fem. BPP Swivel - Long


BPP-MJ-6500-L-04-04
BPP-MJ-6500-L-06-06
BPP-MJ-6500-L-08-08
BPP-MJ-6500-L-10-10
BPP-MJ-6500-L-12-12
BPP-MJ-6500-L-16-16



BPP-MJ-6502-L - 45°

- (1) Male 37°
- (2) Fem. BPP Swivel - Long

BPP-MJ-6502-L-04-04
BPP-MJ-6502-L-06-06
BPP-MJ-6502-L-08-08
BPP-MJ-6502-L-12-12
BPP-MJ-6502-L-16-16




BPP-MJ-6510 - Str.

- (1) Male 37°
- (2) Fem. BPP Swivel

BPP-MJ-6510-04-02
BPP-MJ-6510-04-04
BPP-MJ-6510-04-06
BPP-MJ-6510-05-04
BPP-MJ-6510-05-06
BPP-MJ-6510-06-04
BPP-MJ-6510-06-06
BPP-MJ-6510-06-08
BPP-MJ-6510-08-06
BPP-MJ-6510-08-08
BPP-MJ-6510-08-10
BPP-MJ-6510-08-12
BPP-MJ-6510-10-06
BPP-MJ-6510-10-08
BPP-MJ-6510-10-10
BPP-MJ-6510-10-12
BPP-MJ-6510-12-12
BPP-MJ-6510-12-16
BPP-MJ-6510-16-12
BPP-MJ-6510-16-16
BPP-MJ-6510-20-20
BPP-MJ-6510-24-24
BPP-MJ-6510-32-32

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-MJ-6801-NWO - 90°

(1) Male 37°
(2) Male BPP Adj. O-Ring w/ Retainer Washer


BPP-MJ-6801-04-02-NWO
BPP-MJ-6801-04-04-NWO
BPP-MJ-6801-04-06-NWO
BPP-MJ-6801-05-02-NWO
BPP-MJ-6801-05-04-NWO
BPP-MJ-6801-05-06-NWO
BPP-MJ-6801-06-04-NWO
BPP-MJ-6801-06-06-NWO
BPP-MJ-6801-06-08-NWO
BPP-MJ-6801-08-04-NWO
BPP-MJ-6801-08-06-NWO
BPP-MJ-6801-08-08-NWO
BPP-MJ-6801-08-12-NWO
BPP-MJ-6801-10-06-NWO
BPP-MJ-6801-10-08-NWO
BPP-MJ-6801-10-12-NWO
BPP-MJ-6801-12-08-NWO
BPP-MJ-6801-12-10-NWO
BPP-MJ-6801-12-12-NWO
BPP-MJ-6801-12-16-NWO
BPP-MJ-6801-14-08-NWO
BPP-MJ-6801-14-12-NWO
BPP-MJ-6801-16-12-NWO
BPP-MJ-6801-16-16-NWO
BPP-MJ-6801-16-20-NWO
BPP-MJ-6801-20-16-NWO
BPP-MJ-6801-20-20-NWO
BPP-MJ-6801-24-20-NWO
BPP-MJ-6801-24-24-NWO
BPP-MJ-6801-32-32-NWO



BPP-MJ-6801-L-NWO - 90°

(1) Male 37°
(2) Male BPP Adj. O-Ring w/ Retainer Washer - Long


BPP-MJ-6801-L-06-06-NWO
BPP-MJ-6801-L-08-06-NWO
BPP-MJ-6801-L-08-08-NWO



BPP-MJ-6802-NWO - 45°

(1) Male 37°
(2) Male BPP Adj. O-Ring w/ Retainer Washer


BPP-MJ-6802-04-02-NWO
BPP-MJ-6802-04-04-NWO
BPP-MJ-6802-06-04-NWO
BPP-MJ-6802-06-06-NWO
BPP-MJ-6802-08-06-NWO
BPP-MJ-6802-08-08-NWO
BPP-MJ-6802-10-08-NWO
BPP-MJ-6802-12-08-NWO
BPP-MJ-6802-12-12-NWO
BPP-MJ-6802-16-16-NWO
BPP-MJ-6802-20-20-NWO
BPP-MJ-6802-24-24-NWO



BPP-MJ-6803-NWO - Tee

(1) (2) Male 37°
(3) Male BPP Adj. O-Ring w/ Retainer Washer


BPP-MJ-6803-04-04-02-NWO
BPP-MJ-6803-04-04-04-NWO
BPP-MJ-6803-05-05-04-NWO
BPP-MJ-6803-06-06-04-NWO
BPP-MJ-6803-06-06-06-NWO
BPP-MJ-6803-08-08-06-NWO
BPP-MJ-6803-08-08-08-NWO
BPP-MJ-6803-10-10-08-NWO
BPP-MJ-6803-12-12-12-NWO
BPP-MJ-6803-16-16-16-NWO
BPP-MJ-6803-20-20-20-NWO



BPP-MJ-6804-NWO - Tee

(1) (3) Male 37°
(2) Male BPP Adj. O-Ring w/ Retainer Washer


BPP-MJ-6804-04-02-04-NWO
BPP-MJ-6804-04-04-04-NWO
BPP-MJ-6804-06-04-06-NWO
BPP-MJ-6804-06-06-06-NWO
BPP-MJ-6804-08-06-08-NWO
BPP-MJ-6804-08-08-08-NWO
BPP-MJ-6804-10-08-10-NWO
BPP-MJ-6804-12-12-12-NWO
BPP-MJ-6804-16-16-16-NWO
BPP-MJ-6804-20-20-20-NWO



BPP-MP-1404 - Str.

- (1) Male NPT Pipe
(2) Fem. BPP Swivel


BPP-MP-1404-02-02
BPP-MP-1404-04-04
BPP-MP-1404-04-06
BPP-MP-1404-06-04
BPP-MP-1404-06-06
BPP-MP-1404-06-08
BPP-MP-1404-08-06
BPP-MP-1404-08-08
BPP-MP-1404-12-08
BPP-MP-1404-12-12
BPP-MP-1404-12-16
BPP-MP-1404-16-12
BPP-MP-1404-16-16
BPP-MP-1404-20-20
BPP-MP-1404-24-24
BPP-MP-1404-32-32



BPP-MP-1501 - 90°

- (1) Male NPT Pipe
(2) Fem. BPP Swivel


BPP-MP-1501-02-02
BPP-MP-1501-04-04
BPP-MP-1501-06-06
BPP-MP-1501-08-08
BPP-MP-1501-12-12
BPP-MP-1501-16-16
BPP-MP-1501-20-20
BPP-MP-1501-24-24
BPP-MP-1501-32-32



BPP-MP-5404 - Str.

- (1) Male BPP 30°
(2) Male NPT Pipe


BPP-MP-5404-02-02
BPP-MP-5404-02-04
BPP-MP-5404-02-06
BPP-MP-5404-02-08
BPP-MP-5404-04-02
BPP-MP-5404-04-04
BPP-MP-5404-04-06
BPP-MP-5404-04-08
BPP-MP-5404-04-12
BPP-MP-5404-06-02
BPP-MP-5404-06-04
BPP-MP-5404-06-06
BPP-MP-5404-06-08
BPP-MP-5404-06-12
BPP-MP-5404-06-16
BPP-MP-5404-08-02
BPP-MP-5404-08-04
BPP-MP-5404-08-06
BPP-MP-5404-08-08
BPP-MP-5404-08-12
BPP-MP-5404-08-16
BPP-MP-5404-10-08
BPP-MP-5404-10-12
BPP-MP-5404-12-04
BPP-MP-5404-12-06
BPP-MP-5404-12-08
BPP-MP-5404-12-12
BPP-MP-5404-12-16
BPP-MP-5404-12-20
BPP-MP-5404-16-06
BPP-MP-5404-16-08
BPP-MP-5404-16-12
BPP-MP-5404-16-16
BPP-MP-5404-16-20
BPP-MP-5404-16-24
BPP-MP-5404-16-32
BPP-MP-5404-20-12
BPP-MP-5404-20-16
BPP-MP-5404-20-20
BPP-MP-5404-20-24
BPP-MP-5404-20-32
BPP-MP-5404-24-12
BPP-MP-5404-24-16
BPP-MP-5404-24-20
BPP-MP-5404-24-24
BPP-MP-5404-24-32
BPP-MP-5404-32-16
BPP-MP-5404-32-20
BPP-MP-5404-32-24
BPP-MP-5404-32-32
BPP-MP-5404-40-32
BPP-MP-5404-40-40
BPP-MP-5404-48-48



BPP-MP-5405 - Str.

- (1) Male NPT Pipe
(2) Fem. BPP (Rigid)

BPP-MP-5405-02-02
BPP-MP-5405-02-04
BPP-MP-5405-04-02
BPP-MP-5405-04-04
BPP-MP-5405-04-06
BPP-MP-5405-04-08
BPP-MP-5405-06-04
BPP-MP-5405-06-06
BPP-MP-5405-06-08
BPP-MP-5405-08-04
BPP-MP-5405-08-06
BPP-MP-5405-08-08
BPP-MP-5405-12-04
BPP-MP-5405-12-06
BPP-MP-5405-12-08
BPP-MP-5405-12-12
BPP-MP-5405-16-04
BPP-MP-5405-16-12
BPP-MP-5405-16-16
BPP-MP-5405-20-08
BPP-MP-5405-20-12
BPP-MP-5405-20-16
BPP-MP-5405-20-20
BPP-MP-5405-24-20
BPP-MP-5405-24-24
BPP-MP-5405-32-32




BPP-MP-5500 - 90°

- (1) Male BPP 30°
(2) Male NPT Pipe

BPP-MP-5500-02-02
BPP-MP-5500-04-04
BPP-MP-5500-06-06
BPP-MP-5500-08-08
BPP-MP-5500-12-12
BPP-MP-5500-16-16
BPP-MP-5500-20-20
BPP-MP-5500-24-24

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-OFS-2404 - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male BPP 30°


BPP-OFS-2404-04-02
BPP-OFS-2404-04-04
BPP-OFS-2404-06-04
BPP-OFS-2404-06-06
BPP-OFS-2404-08-06
BPP-OFS-2404-08-08
BPP-OFS-2404-10-08
BPP-OFS-2404-12-08
BPP-OFS-2404-12-12
BPP-OFS-2404-16-16
BPP-OFS-2404-20-20
BPP-OFS-2404-24-24



BPP-OFS-6400-EO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male BPP w/ Reflex Seal


BPP-OFS-6400-04-02-EO
BPP-OFS-6400-04-04-EO
BPP-OFS-6400-04-06-EO
BPP-OFS-6400-04-08-EO
BPP-OFS-6400-06-02-EO
BPP-OFS-6400-06-04-EO
BPP-OFS-6400-06-06-EO
BPP-OFS-6400-06-08-EO
BPP-OFS-6400-06-12-EO
BPP-OFS-6400-08-04-EO
BPP-OFS-6400-08-06-EO
BPP-OFS-6400-08-08-EO
BPP-OFS-6400-08-12-EO
BPP-OFS-6400-10-06-EO
BPP-OFS-6400-10-08-EO
BPP-OFS-6400-10-12-EO
BPP-OFS-6400-12-08-EO
BPP-OFS-6400-12-12-EO
BPP-OFS-6400-12-16-EO
BPP-OFS-6400-12-20-EO
BPP-OFS-6400-16-12-EO
BPP-OFS-6400-16-16-EO
BPP-OFS-6400-16-20-EO
BPP-OFS-6400-16-24-EO
BPP-OFS-6400-20-16-EO
BPP-OFS-6400-20-20-EO
BPP-OFS-6400-20-24-EO
BPP-OFS-6400-24-24-EO



BPP-OFS-6400-WO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male BPP w/ Washer & O-Ring


BPP-OFS-6400-04-02-WO
BPP-OFS-6400-04-04-WO
BPP-OFS-6400-04-06-WO
BPP-OFS-6400-06-04-WO
BPP-OFS-6400-06-06-WO
BPP-OFS-6400-06-08-WO
BPP-OFS-6400-08-06-WO
BPP-OFS-6400-08-08-WO
BPP-OFS-6400-08-12-WO
BPP-OFS-6400-10-08-WO
BPP-OFS-6400-10-12-WO
BPP-OFS-6400-12-08-WO
BPP-OFS-6400-12-12-WO
BPP-OFS-6400-12-16-WO
BPP-OFS-6400-16-12-WO
BPP-OFS-6400-16-16-WO
BPP-OFS-6400-20-16-WO
BPP-OFS-6400-20-20-WO
BPP-OFS-6400-24-24-WO



BPP-OFS-6400-L-WO - Str.

- (1) Male O-Ring Face Seal - Long (SAE)
(2) Male BPP w/ Washer & O-Ring

BPP-OFS-6400-L-08-06-WO
BPP-OFS-6400-L-08-08-WO
BPP-OFS-6400-L-10-08-WO
BPP-OFS-6400-L-10-12-WO
BPP-OFS-6400-L-12-12-WO
BPP-OFS-6400-L-16-16-WO
BPP-OFS-6400-L-20-20-WO




BPP-OFS-6801-NWO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male BPP Adj. O-Ring w/ Retainer Washer

BPP-OFS-6801-04-02-NWO
BPP-OFS-6801-04-04-NWO
BPP-OFS-6801-04-06-NWO
BPP-OFS-6801-06-04-NWO


BPP-OFS-6801-06-06-NWO
BPP-OFS-6801-06-08-NWO
BPP-OFS-6801-08-04-NWO
BPP-OFS-6801-08-06-NWO
BPP-OFS-6801-08-08-NWO
BPP-OFS-6801-10-08-NWO
BPP-OFS-6801-10-12-NWO
BPP-OFS-6801-12-08-NWO
BPP-OFS-6801-12-12-NWO
BPP-OFS-6801-12-16-NWO
BPP-OFS-6801-16-12-NWO
BPP-OFS-6801-16-16-NWO
BPP-OFS-6801-16-20-NWO
BPP-OFS-6801-20-16-NWO
BPP-OFS-6801-20-20-NWO
BPP-OFS-6801-24-24-NWO



BPP-OFS-6802-NWO - 45°

- (1) Male O-Ring Face Seal (SAE)
(2) Male BPP Adj. O-Ring w/ Retainer Washer

BPP-OFS-6802-04-02-NWO
BPP-OFS-6802-04-04-NWO
BPP-OFS-6802-06-04-NWO
BPP-OFS-6802-06-06-NWO
BPP-OFS-6802-08-06-NWO
BPP-OFS-6802-08-08-NWO
BPP-OFS-6802-10-08-NWO
BPP-OFS-6802-12-12-NWO
BPP-OFS-6802-16-16-NWO




BPP-OFS-6803-NWO - Tee

- (1) (2) Male O-Ring Face Seal (SAE)
(3) Male BPP Adj. O-Ring w/ Retainer Washer

BPP-OFS-6803-04-04-02-NWO
BPP-OFS-6803-04-04-04-NWO
BPP-OFS-6803-06-06-04-NWO
BPP-OFS-6803-06-06-06-NWO
BPP-OFS-6803-08-08-06-NWO
BPP-OFS-6803-08-08-08-NWO
BPP-OFS-6803-10-10-08-NWO
BPP-OFS-6803-12-12-12-NWO
BPP-OFS-6803-16-16-16-NWO

BRITISH PARALLEL PIPE


Styles may vary from picture



BPP-OFS-6804-NWO - Tee

- (1) (3) Male O-Ring Face Seal (SAE)
- (2) Male BPP Adj. O-Ring w/ Retainer Washer

BPP-OFS-6804-04-02-04-NWO
 BPP-OFS-6804-04-04-04-NWO
 BPP-OFS-6804-06-04-06-NWO
 BPP-OFS-6804-06-06-06-NWO
 BPP-OFS-6804-08-06-08-NWO
 BPP-OFS-6804-08-08-08-NWO
 BPP-OFS-6804-10-08-10-NWO
 BPP-OFS-6804-12-12-12-NWO
 BPP-OFS-6804-12-16-12-NWO
 BPP-OFS-6804-16-16-16-NWO



BPP-SPO-2272-Str.

- (1) Steel Push On
- (2) Male BPP


BPP-SPO-2272-04-02
 BPP-SPO-2272-04-04
 BPP-SPO-2272-06-04
 BPP-SPO-2272-06-06
 BPP-SPO-2272-08-08
 BPP-SPO-2272-12-12
 BPP-SPO-2272-16-16



BPP-SPO-2278-Str.

- (1) Steel Push On
- (2) Fem. BPP Swivel


BPP-SPO-2278-04-04
 BPP-SPO-2278-06-06
 BPP-SPO-2278-08-08
 BPP-SPO-2278-10-10
 BPP-SPO-2278-12-12
 BPP-SPO-2278-16-16



BPP-SPO-2305 - 45°

- (1) Steel Push On
- (2) Fem. BPP (30° Cone) Bent Tube Swivel


BPP-SPO-2305-04-04
 BPP-SPO-2305-06-06
 BPP-SPO-2305-08-08
 BPP-SPO-2305-10-10
 BPP-SPO-2305-12-12
 BPP-SPO-2305-16-16



BPP-SPO-2306 - 90°

- (1) Steel Push On
- (2) Fem. BPP (30° Cone) Bent Tube Swivel

BPP-SPO-2306-04-04
 BPP-SPO-2306-06-06
 BPP-SPO-2306-08-08
 BPP-SPO-2306-10-10
 BPP-SPO-2306-12-12
 BPP-SPO-2306-16-16




BPPOFS-MJ-6510 - Str.

- (1) Male 37°
- (2) Fem. BPP O-Ring Face Seal Swivel

BPPOFS-MJ-6510-06-06
 BPPOFS-MJ-6510-06-08
 BPPOFS-MJ-6510-08-08
 BPPOFS-MJ-6510-08-10
 BPPOFS-MJ-6510-08-12
 BPPOFS-MJ-6510-10-08
 BPPOFS-MJ-6510-10-12
 BPPOFS-MJ-6510-12-12


BRITISH STANDARD TAPER PIPE

Styles may vary from picture



BST-5404 - Str.
(1) (2) Male BSPT

BST-5404-02-02
BST-5404-04-02
BST-5404-04-04
BST-5404-06-02
BST-5404-06-04
BST-5404-06-06
BST-5404-08-04
BST-5404-08-06
BST-5404-08-08
BST-5404-10-10
BST-5404-12-08
BST-5404-12-12
BST-5404-16-12
BST-5404-16-16
BST-5404-20-16
BST-5404-20-20
BST-5404-24-20
BST-5404-24-24
BST-5404-32-24
BST-5404-32-32



BST-5406 - Str.
(1) Male BSPT
(2) Fem. BSPT

BST-5406-04-02
BST-5406-06-02
BST-5406-06-04
BST-5406-08-04
BST-5406-08-06
BST-5406-12-06
BST-5406-12-08
BST-5406-16-08
BST-5406-16-12



BST-5406-HHP
(1) BSPT Hollow Hex Plug

BST-5406-HHP-02
BST-5406-HHP-04
BST-5406-HHP-06
BST-5406-HHP-08
BST-5406-HHP-12
BST-5406-HHP-16



BST-5406-P
(1) Male BSPT Plug

BST-5406-P-02
BST-5406-P-04
BST-5406-P-06
BST-5406-P-08
BST-5406-P-10
BST-5406-P-12
BST-5406-P-16
BST-5406-P-20
BST-5406-P-24
BST-5406-P-32




BST-BPO-2272 - Str.
(1) Brass Push On
(2) Male BSPT

BST-BPO-2272-04-04
BST-BPO-2272-06-04
BST-BPO-2272-06-06
BST-BPO-2272-08-06
BST-BPO-2272-08-08
BST-BPO-2272-12-12




BST-SPO-2272 - Str.
(1) Steel Push On
(2) Male BSPT

BST-SPO-2272-04-04
BST-SPO-2272-06-06
BST-SPO-2272-06-08
BST-SPO-2272-08-06
BST-SPO-2272-08-08
BST-SPO-2272-12-12
BST-SPO-2272-16-16



BST-FBPP-5405 - Str.
(1) Male BSPT
(2) Fem. BPP

BST-FBPP-5405-04-02
BST-FBPP-5405-04-04
BST-FBPP-5405-06-02
BST-FBPP-5405-06-04
BST-FBPP-5405-06-06
BST-FBPP-5405-08-04
BST-FBPP-5405-08-08
BST-FBPP-5405-12-04
BST-FBPP-5405-12-06
BST-FBPP-5405-16-08




BST-FJX-6505 - Str.
(1) Fem. 37° Swivel
(2) Male BSPT

BST-FJX-6505-04-02
BST-FJX-6505-04-04
BST-FJX-6505-05-04
BST-FJX-6505-06-04
BST-FJX-6505-06-06
BST-FJX-6505-08-04
BST-FJX-6505-08-06
BST-FJX-6505-08-08
BST-FJX-6505-10-08
BST-FJX-6505-12-08
BST-FJX-6505-12-12
BST-FJX-6505-16-12
BST-FJX-6505-16-16
BST-FJX-6505-20-20

BRITISH STANDARD TAPER PIPE


Styles may vary from picture



BST-FP-5405 - Str.

(1) Male BSPT
(2) Fem. NPT Pipe


BST-FP-5405-02-02
BST-FP-5405-02-04
BST-FP-5405-04-02
BST-FP-5405-04-04
BST-FP-5405-06-06
BST-FP-5405-08-08
BST-FP-5405-12-12
BST-FP-5405-16-16
BST-FP-5405-20-20
BST-FP-5405-24-24
BST-FP-5405-32-32



BST-MJ-2404 - Str.

(1) Male 37°
(2) Male BSPT


BST-MJ-2404-02-02
BST-MJ-2404-04-02
BST-MJ-2404-04-04
BST-MJ-2404-04-06
BST-MJ-2404-05-02
BST-MJ-2404-05-04
BST-MJ-2404-05-06
BST-MJ-2404-06-02
BST-MJ-2404-06-04
BST-MJ-2404-06-06
BST-MJ-2404-06-08
BST-MJ-2404-08-04
BST-MJ-2404-08-06
BST-MJ-2404-08-08
BST-MJ-2404-08-12
BST-MJ-2404-08-16
BST-MJ-2404-10-06
BST-MJ-2404-10-08
BST-MJ-2404-10-12
BST-MJ-2404-12-08
BST-MJ-2404-12-12
BST-MJ-2404-12-16
BST-MJ-2404-14-12
BST-MJ-2404-16-08
BST-MJ-2404-16-12
BST-MJ-2404-16-16
BST-MJ-2404-16-20
BST-MJ-2404-20-16
BST-MJ-2404-20-20
BST-MJ-2404-24-20
BST-MJ-2404-24-24
BST-MJ-2404-32-32



BST-MJ-2501 - 90°

(1) Male 37°
(2) Male BSPT


BST-MJ-2501-02-02
BST-MJ-2501-04-02
BST-MJ-2501-04-04
BST-MJ-2501-04-06
BST-MJ-2501-05-02
BST-MJ-2501-05-04
BST-MJ-2501-06-02
BST-MJ-2501-06-04
BST-MJ-2501-06-06
BST-MJ-2501-06-08
BST-MJ-2501-08-04
BST-MJ-2501-08-06
BST-MJ-2501-08-08
BST-MJ-2501-10-06
BST-MJ-2501-10-08
BST-MJ-2501-10-12
BST-MJ-2501-12-08
BST-MJ-2501-12-12
BST-MJ-2501-16-12
BST-MJ-2501-16-16
BST-MJ-2501-20-16
BST-MJ-2501-20-20
BST-MJ-2501-24-24



BST-MJ-2503 - 45°

(1) Male 37°
(2) Male BSPT


BST-MJ-2503-04-02
BST-MJ-2503-04-04
BST-MJ-2503-06-04
BST-MJ-2503-06-06
BST-MJ-2503-08-06
BST-MJ-2503-08-08
BST-MJ-2503-10-08
BST-MJ-2503-12-12
BST-MJ-2503-16-16
BST-MJ-2503-20-20



BST-MJ-2601 - Tee

(1) (2) Male 37°
(3) Male BSPT


BST-MJ-2601-04-04-04
BST-MJ-2601-06-06-04
BST-MJ-2601-08-08-06
BST-MJ-2601-10-10-08
BST-MJ-2601-12-12-12



BST-MJ-2605 - Tee

(1) (3) Male 37°
(2) Male BSPT

BST-MJ-2605-04-04-04
BST-MJ-2605-06-04-06
BST-MJ-2605-08-06-08
BST-MJ-2605-10-08-10
BST-MJ-2605-12-12-12



BST-MP-5404 - Str.


(1) Male BSPT
(2) Male NPT Pipe

BST-MP-5404-02-02
BST-MP-5404-04-04
BST-MP-5404-04-06
BST-MP-5404-06-04
BST-MP-5404-06-06
BST-MP-5404-08-08
BST-MP-5404-12-12
BST-MP-5404-16-16
BST-MP-5404-20-20
BST-MP-5404-24-24
BST-MP-5404-32-32
BST-MP-5404-40-40



JISBP-0304-C
(1) Fem. 30° BPP (Flare) Cap

JISBP-0304-C-04
JISBP-0304-C-06
JISBP-0304-C-08
JISBP-0304-C-12
JISBP-0304-C-16
JISBP-0304-C-20
JISBP-0304-C-24
JISBP-0304-C-32



JISBP-0321
JIS Sealing Seat
(Converts Male 30° BPP
Coneseat To 30° JIS Flare)


JISBP-0321-04
JISBP-0321-06
JISBP-0321-08
JISBP-0321-12
JISBP-0321-16
JISBP-0321-20
JISBP-0321-24

Styles may vary from picture




JISBP-2403 - Str.
(1) (2) Male 30° BPP (Flare)

JISBP-2403-04-04
JISBP-2403-06-06
JISBP-2403-08-08
JISBP-2403-12-12
JISBP-2403-16-16




JISBP-2408
(1) Male 30° BPP (Flare) Plug

JISBP-2408-02
JISBP-2408-04
JISBP-2408-06
JISBP-2408-08
JISBP-2408-12
JISBP-2408-16
JISBP-2408-20
JISBP-2408-24
JISBP-2408-32




JISBP-6500 - 90°
(1) Male 30° BPP (Flare)
(2) Fem. 30° BPP (Flare) Swivel

JISBP-6500-04-04
JISBP-6500-06-06
JISBP-6500-08-08
JISBP-6500-12-12

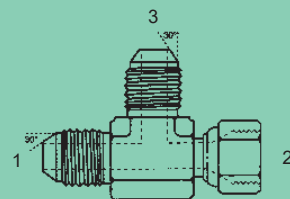


JISBP-6602 - Tee
(1) (3) Male 30° BPP (Flare)
(2) Fem. 30° BPP (Flare) Swivel

JISBP-6602-04-04-04
JISBP-6602-06-06-06
JISBP-6602-08-08-08
JISBP-6602-12-12-12



JISBP-BPP-6801-NWO - 90°
(1) Male 30° BPP (Flare)
(2) Male BPP Adj. O-Ring

JISBP-BPP-6801-06-06-NWO
JISBP-BPP-6801-08-08-NWO




JISBP-BST-2404 - Str.
(1) Male 30° BPP (Flare)
(2) Male BSPT

JISBP-BST-2404-04-04
JISBP-BST-2404-04-06
JISBP-BST-2404-06-06
JISBP-BST-2404-06-08
JISBP-BST-2404-08-08
JISBP-BST-2404-12-12
JISBP-BST-2404-16-16


JAPANESE INDUSTRIAL STANDARD

Styles may vary from picture
All JISM - Komatsu 1.5mm thread



JISBP-BST-2501 - 90°
(1) Male 30° BPP (Flare)
(2) Male BSPT

JISBP-BST-2501-04-02
JISBP-BST-2501-04-04
JISBP-BST-2501-06-06
JISBP-BST-2501-08-08
JISBP-BST-2501-12-12
JISBP-BST-2501-16-16

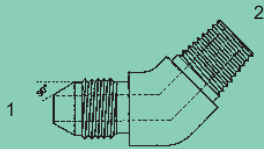


JISBP-BST-2503 - 90°
(1) Male 30° BPP (Flare)
(2) Male BSPT

JISBP-BST-2503-04-04
JISBP-BST-2503-06-06
JISBP-BST-2503-08-08
JISBP-BST-2503-12-12
JISBP-BST-2503-16-16




JISBP-MB-6400-O - Str.
(1) Male 30° BPP (Flare)
(2) Male O-Ring (SAE)

JISBP-MB-6400-04-04-O
JISBP-MB-6400-06-06-O
JISBP-MB-6400-08-06-O
JISBP-MB-6400-08-08-O
JISBP-MB-6400-12-12-O
JISBP-MB-6400-16-16-O
JISBP-MB-6400-20-20-O




JISBP-MJ-2403 - Str.
(1) Male 30° BPP (Flare)
(2) Male 37°

JISBP-MJ-2403-04-04
JISBP-MJ-2403-06-06
JISBP-MJ-2403-08-08
JISBP-MJ-2403-12-12



JISBP-MJ-2406 - Str.
(1) Fem. 30° BPP (Flare)
(2) Male 37°

JISBP-MJ-2406-04-04
JISBP-MJ-2406-04-06
JISBP-MJ-2406-06-06
JISBP-MJ-2406-08-08
JISBP-MJ-2406-12-12
JISBP-MJ-2406-16-16
JISBP-MJ-2406-20-20
JISBP-MJ-2406-24-24
JISBP-MJ-2406-32-32




JISBP-MOFS-2406 - Str.
(1) Fem. 30° BPP (Flare)
(2) Male O-Ring Face Seal (SAE)

JISBP-MOFS-2406-04-04
JISBP-MOFS-2406-06-06
JISBP-MOFS-2406-08-08
JISBP-MOFS-2406-12-12




JISBP-MP-2404 - Str.
(1) Male 30° BPP (Flare)
(2) Male NPT Pipe

JISBP-MP-2404-04-02
JISBP-MP-2404-04-04
JISBP-MP-2404-06-06
JISBP-MP-2404-08-08
JISBP-MP-2404-12-12

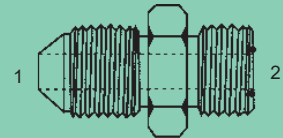

JISBP-OFS-2403 - Str.
(1) Male 30° BPP (Flare)
(2) Male O-Ring Face Seal (SAE)

JISBP-OFS-2403-04-04
JISBP-OFS-2403-06-06
JISBP-OFS-2403-08-08



JISM-0304-C
(1) Fem. 30° Metric Komatsu Cap


JISM-0304-C-14
JISM-0304-C-16
JISM-0304-C-18
JISM-0304-C-22
JISM-0304-C-24
JISM-0304-C-30
JISM-0304-C-33

JAPANESE INDUSTRIAL STANDARD




JISM-2403 - Str.
(1) (2) Male 30° Metric Komatsu Union

JISM-2403-14-14
JISM-2403-16-16
JISM-2403-18-18
JISM-2403-22-22
JISM-2403-24-24
JISM-2403-30-30
JISM-2403-33-33



JISM-2408
(1) Male 30° Metric Komatsu Plug


JISM-2408-14
JISM-2408-16
JISM-2408-18
JISM-2408-22
JISM-2408-24
JISM-2408-30
JISM-2408-33



JISM-6500 - 90°
(1) Male 30° Metric Komatsu Swivel
(2) Fem. 30° Metric Komatsu Swivel


JISM-6500-14-14
JISM-6500-18-18
JISM-6500-22-22
JISM-6500-24-24
JISM-6500-30-30
JISM-6500-33-33

Styles may vary from picture
All JISM - Komatsu 1.5mm thread

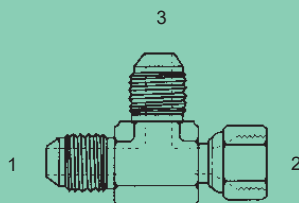


JISM-6602 - Tee
(1) (3) Male 30° Metric Komatsu Tee
(2) Fem. 30° Metric Komatsu Swivel

JISM-6602-14-14-14
JISM-6602-18-18-18
JISM-6602-22-22-22
JISM-6602-24-24-24
JISM-6602-30-30-30

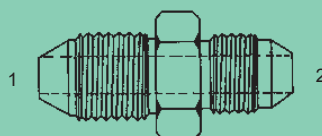


JISM-MJ-2403 - Str.
(1) Male 30° Metric Komatsu Tee
(2) Male 37° Tee

JISM-MJ-2403-14-04
JISM-MJ-2403-18-06
JISM-MJ-2403-22-08
JISM-MJ-2403-24-10
JISM-MJ-2403-30-12
JISM-MJ-2403-33-16

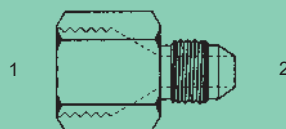

JISM-MJ-2406 - Str.
(1) Fem. 30° Metric Komatsu Tee
(2) Male 37° Tee

JISM-MJ-2406-14-04
JISM-MJ-2406-16-06
JISM-MJ-2406-18-06
JISM-MJ-2406-22-08
JISM-MJ-2406-24-10
JISM-MJ-2406-30-12
JISM-MJ-2406-33-16




JISM-MOFS-2406 - Str.
(1) Fem. 30° Metric Komatsu Tee
(2) Male O-Ring Face Seal (SAE)

JISM-MOFS-2406-14-04
JISM-MOFS-2406-18-06
JISM-MOFS-2406-22-08
JISM-MOFS-2406-24-10



JISM-MP-2404 - Str.
(1) Male 30° Metric Komatsu Tee
(2) Male NPT Pipe

JISM-MP-2404-14-04
JISM-MP-2404-16-06
JISM-MP-2404-18-06
JISM-MP-2404-22-08
JISM-MP-2404-24-08
JISM-MP-2404-30-12
JISM-MP-2404-33-16

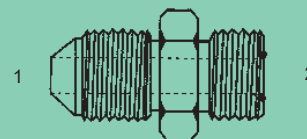

JISM-OFS-2403 - Str.
(1) Male 30° Metric Komatsu Tee
(2) Male O-Ring Face Seal (SAE)

JISM-OFS-2403-14-04
JISM-OFS-2403-18-06
JISM-OFS-2403-22-08
JISM-OFS-2403-24-10
JISM-OFS-2403-30-12
JISM-OFS-2403-33-16

METRIC

Styles may vary from picture



M-0319

37° Tube Sleeve (SAE)
for Metric Tubing

Sleeve #	Required JIC Size
M-0319-06	04
M-0319-08	05
M-0319-10	06
M-0319-12	08
M-0319-14	10
M-0319-15	10
M-0319-16	10
M-0319-18	12
M-0319-20	12
M-0319-22	14
M-0319-25	16
M-0319-30	20
M-0319-32	20
M-0319-38	24



M-4000

Metric Buna-N 90 Duro O-Ring
(for use w/ M-6000)

M-4000-10
M-4000-12
M-4000-14
M-4000-16
M-4000-18
M-4000-20
M-4000-22
M-4000-24
M-4000-26
M-4000-27
M-4000-33
M-4000-42
M-4000-48



M-4000-EO

Metric Peflex Seal


M-4000-EO-08
M-4000-EO-10
M-4000-EO-12
M-4000-EO-14
M-4000-EO-16
M-4000-EO-18
M-4000-EO-20
M-4000-EO-22
M-4000-EO-26
M-4000-EO-27
M-4000-EO-33
M-4000-EO-42
M-4000-EO-48



M-4000-ISO

Metric ISO O-Ring (6149)


M-4000-ISO-08
M-4000-ISO-10
M-4000-ISO-12
M-4000-ISO-14
M-4000-ISO-16
M-4000-ISO-18
M-4000-ISO-22
M-4000-ISO-27
M-4000-ISO-33
M-4000-ISO-38
M-4000-ISO-42
M-4000-ISO-48
M-4000-ISO-60



M-5000 - Str.

(1) (2) Fem. Metric (Rigid, Parallel)

M-5000-10X1.0-10X1.0
M-5000-12X1.5-12X1.5
M-5000-14X1.5-14X1.5
M-5000-16X1.5-16X1.5
M-5000-18X1.5-18X1.5
M-5000-20X1.5-20X1.5
M-5000-22X1.5-22X1.5
M-5000-26X1.5-26X1.5




M-5404 - Str.

(1) (2) Male Metric (Parallel)

M-5404-10X1.5-10X1.5
M-5404-12X1.5-10X1.5
M-5404-12X1.5-12X1.5
M-5404-14X1.5-12X1.5
M-5404-14X1.5-14X1.5
M-5404-16X1.5-12X1.5
M-5404-16X1.5-14X1.5
M-5404-16X1.5-16X1.5
M-5404-18X1.5-16X1.5
M-5404-18X1.5-18X1.5
M-5404-20X1.5-18X1.5
M-5404-20X1.5-20X1.5
M-5404-22X1.5-18X1.5
M-5404-22X1.5-20X1.5
M-5404-22X1.5-22X1.5
M-5404-24X1.5-20X1.5
M-5404-24X1.5-22X1.5
M-5404-24X1.5-24X1.5
M-5404-26X1.5-24X1.5
M-5404-26X1.5-26X1.5
M-5404-30X1.5-30X1.5

METRIC

Styles may vary from picture



M-6000

Metric Steel Retaining Ring
(use w/ M-4000)


M-6000-10
M-6000-12
M-6000-14
M-6000-16
M-6000-18
M-6000-20
M-6000-22
M-6000-24
M-6000-26
M-6000-27
M-6000-33
M-6000-42
M-6000-48



M-6001

Metric Bonded Seal


M-6001-06
M-6001-08
M-6001-10
M-6001-12
M-6001-14
M-6001-16
M-6001-18
M-6001-20
M-6001-22
M-6001-24
M-6001-26
M-6001-27
M-6001-30
M-6001-33
M-6001-36
M-6001-42
M-6001-45
M-6001-50
M-6001-52



M-6408 - Str.

(1) Metric Hex Plug
(Parallel, use w/ M-6001)


M-6408-08X1.0
M-6408-10X1.0
M-6408-10X1.5
M-6408-12X1.0
M-6408-12X1.5
M-6408-14X1.5
M-6408-16X1.5
M-6408-18X1.5
M-6408-20X1.5
M-6408-22X1.5
M-6408-24X1.5
M-6408-26X1.5
M-6408-30X1.5



M-6408-ISO - Str.

(1) Metric Hex Plug
(Parallel) w/ ISO O-Ring

M-6408-08X1.0-ISO
M-6408-10X1.0-ISO
M-6408-12X1.5-ISO
M-6408-14X1.5-ISO
M-6408-16X1.5-ISO
M-6408-18X1.5-ISO
M-6408-22X1.5-ISO
M-6408-27X2.0-ISO
M-6408-33X2.0-ISO
M-6408-42X2.0-ISO



M-6408-HHP-EO - Str.

(1) Metric Countersunk Hollow Hex
Plug w/ Peflex Seal

M-6408-HHP-08X1.0-EO
M-6408-HHP-10X1.0-EO
M-6408-HHP-12X1.5-EO
M-6408-HHP-14X1.5-EO
M-6408-HHP-16X1.5-EO
M-6408-HHP-18X1.5-EO


M-6408-HHP-20X1.5-EO
M-6408-HHP-22X1.5-EO
M-6408-HHP-24X1.5-EO
M-6408-HHP-26X1.5-EO
M-6408-HHP-27X2.0-EO
M-6408-HHP-33X2.0-EO
M-6408-HHP-42X2.0-EO
M-6408-HHP-48X2.0-EO



M-6408-HHP-ISO - Str.

(1) Metric Countersunk Hollow Hex
Plug w/ ISO O-Ring 6149

M-6408-HHP-10X1.0-ISO
M-6408-HHP-12X1.5-ISO
M-6408-HHP-14X1.5-ISO
M-6408-HHP-16X1.5-ISO
M-6408-HHP-18X1.5-ISO
M-6408-HHP-20X1.5-ISO
M-6408-HHP-22X1.5-ISO
M-6408-HHP-27X2.0-ISO
M-6408-HHP-42X2.0-ISO

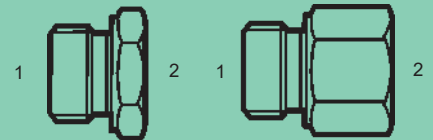


M-6410 - Str.

(1) Male Metric (Parallel)
(2) Fem. Metric (Parallel)
(Length of Hex may vary)

M-6410-12X1.5-12X1.5
M-6410-12X1.5-14X1.5
M-6410-16X1.5-10X1.0
M-6410-16X1.5-22X1.5
M-6410-18X1.5-10X1.0
M-6410-18X1.5-12X1.5
M-6410-22X1.5-10X1.0
M-6410-22X1.5-12X1.5
M-6410-22X1.5-14X1.5
M-6410-22X1.5-16X1.5
M-6410-22X1.5-22X1.5
M-6410-22X1.5-26X1.5
M-6410-26X1.5-22X1.5


METRIC

Styles may vary from picture

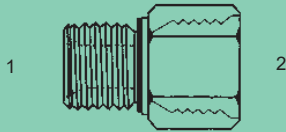


M-FB-6410-WO - Str.
(1) Male Metric w/ Washer O-Ring
(2) Fem. O-Ring (SAE)

M-FB-6410-10X1.0-04-WO
M-FB-6410-14X1.5-06-WO
M-FB-6410-16X1.5-08-WO
M-FB-6410-18X1.5-08-WO

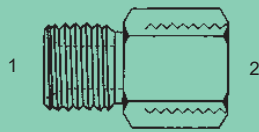


M-FBPP-5405 - Str.
(1) Male Metric (Parallel)
(2) Fem. BPP (Rigid)

M-FBPP-5405-08X1.0-02
M-FBPP-5405-12X1.5-04
M-FBPP-5405-14X1.5-04
M-FBPP-5405-16X1.5-04
M-FBPP-5405-16X1.5-06
M-FBPP-5405-16X1.5-08
M-FBPP-5405-18X1.5-02
M-FBPP-5405-18X1.5-04
M-FBPP-5405-18X1.5-06
M-FBPP-5405-18X1.5-08
M-FBPP-5405-22X1.5-08




M-FBPP-6510 - Str.
(1) Male Metric (Parallel)
(2) Fem. BPP Pipe Swivel

M-FBPP-6510-12X1.5-04
M-FBPP-6510-14X1.5-04
M-FBPP-6510-14X1.5-06
M-FBPP-6510-16X1.5-06
M-FBPP-6510-18X1.5-06
M-FBPP-6510-18X1.5-08
M-FBPP-6510-20X1.5-08
M-FBPP-6510-22X1.5-08
M-FBPP-6510-22X1.5-12
M-FBPP-6510-26X1.5-08
M-FBPP-6510-26X1.5-12
M-FBPP-6510-30X2.0-06
M-FBPP-6510-30X2.0-08




M-FJX-6402-DS - Str.
(1) Fem. 37° Swivel
(2) Male Metric w/ Dowty Seal (Parallel)

M-FJX-6402-06-14X1.5-DS
M-FJX-6402-06-22X1.5-DS
M-FJX-6402-08-18X1.5-DS
M-FJX-6402-08-20X1.5-DS
M-FJX-6402-08-22X1.5-DS
M-FJX-6402-10-16X1.5-DS
M-FJX-6402-10-18X1.5-DS
M-FJX-6402-10-20X1.5-DS




M-FJX-6402-WO - Str.
(1) Fem. 37° Swivel
(2) Male Metric w/ Washer & O-Ring (Parallel)

M-FJX-6402-04-10X1.0-WO
M-FJX-6402-05-12X1.5-WO
M-FJX-6402-06-14X1.5-WO
M-FJX-6402-08-16X1.5-WO
M-FJX-6402-10-22X1.5-WO
M-FJX-6402-12-27X2.0-WO
M-FJX-6402-16-33X2.0-WO



M-FJX-6505 - Str.
(1) Fem. 37° Swivel
(2) Male Metric (Parallel)

M-FJX-6505-05-12X1.5
M-FJX-6505-06-14X1.5
M-FJX-6505-06-16X1.5
M-FJX-6505-06-18X1.5
M-FJX-6505-06-20X1.5
M-FJX-6505-06-22X1.5
M-FJX-6505-08-16X1.5
M-FJX-6505-08-18X1.5
M-FJX-6505-08-20X1.5
M-FJX-6505-08-22X1.5
M-FJX-6505-10-16X1.5
M-FJX-6505-10-18X1.5
M-FJX-6505-10-20X1.5
M-FJX-6505-10-22X1.5

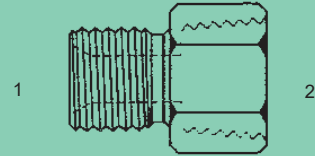


M-FP-5405 - Str.
(1) Male Metric (Parallel)
(2) Fem. NPT Pipe

M-FP-5405-06X.75-02
M-FP-5405-06X1.0-02
M-FP-5405-08X1.0-02
M-FP-5405-10X1.0-02
M-FP-5405-10X1.0-04
M-FP-5405-10X1.25-02
M-FP-5405-10X1.5-02
M-FP-5405-12X1.0-04
M-FP-5405-12X1.25-04
M-FP-5405-12X1.5-02
M-FP-5405-12X1.5-04
M-FP-5405-12X1.5-06
M-FP-5405-14X1.5-02
M-FP-5405-14X1.5-04
M-FP-5405-14X1.5-06
M-FP-5405-16X1.5-02
M-FP-5405-16X1.5-04
M-FP-5405-16X1.5-06
M-FP-5405-16X1.5-08
M-FP-5405-18X1.5-04
M-FP-5405-18X1.5-06
M-FP-5405-18X1.5-08
M-FP-5405-20X1.5-06
M-FP-5405-22X1.5-06
M-FP-5405-22X1.5-08
M-FP-5405-22X1.5-12
M-FP-5405-24X1.5-12
M-FP-5405-26X1.5-12
M-FP-5405-27X2.0-12
M-FP-5405-30X1.5-08
M-FP-5405-30X1.5-12
M-FP-5405-30X2.0-12
M-FP-5405-33X2.0-16
M-FP-5405-42X2.0-16

METRIC


Styles may vary from picture



M-FP-6405-DS - Str.

- (1) Male Metric w/ Bonded Seal
(2) Fem. NPT Pipe


M-FP-6405-06X.75-02-DS
M-FP-6405-08X1.0-02-DS
M-FP-6405-10X1.0-02-DS
M-FP-6405-10X1.0-04-DS
M-FP-6405-10X1.5-02-DS
M-FP-6405-12X1.25-04-DS
M-FP-6405-12X1.5-02-DS
M-FP-6405-12X1.5-04-DS
M-FP-6405-12X1.5-06-DS
M-FP-6405-14X1.5-02-DS
M-FP-6405-14X1.5-04-DS
M-FP-6405-14X1.5-06-DS
M-FP-6405-16X1.5-02-DS
M-FP-6405-16X1.5-06-DS
M-FP-6405-16X1.5-08-DS
M-FP-6405-18X1.5-04-DS
M-FP-6405-18X1.5-06-DS
M-FP-6405-18X1.5-08-DS
M-FP-6405-20X1.5-06-DS
M-FP-6405-22X1.5-06-DS
M-FP-6405-22X1.5-08-DS
M-FP-6405-22X1.5-12-DS
M-FP-6405-24X1.5-08-DS
M-FP-6405-24X1.5-12-DS
M-FP-6405-26X1.5-12-DS
M-FP-6405-27X2.0-12-DS
M-FP-6405-33X2.0-16-DS
M-FP-6405-42X2.0-16-DS



M-FP-6405-WO - Str.

- (1) Male Metric w/ Washer & O-Ring
(2) Fem. NPT Pipe

M-FP-6405-10X1.0-02-WO
M-FP-6405-10X1.0-04-WO
M-FP-6405-12X1.5-02-WO
M-FP-6405-12X1.5-04-WO
M-FP-6405-14X1.5-02-WO
M-FP-6405-14X1.5-04-WO
M-FP-6405-14X1.5-06-WO
M-FP-6405-14X1.5-08-WO
M-FP-6405-16X1.5-02-WO
M-FP-6405-16X1.5-04-WO
M-FP-6405-16X1.5-06-WO
M-FP-6405-16X1.5-08-WO
M-FP-6405-18X1.5-04-WO
M-FP-6405-18X1.5-06-WO
M-FP-6405-18X1.5-08-WO
M-FP-6405-20X1.5-06-WO
M-FP-6405-22X1.5-06-WO
M-FP-6405-22X1.5-08-WO
M-FP-6405-22X1.5-12-WO
M-FP-6405-24X1.5-08-WO
M-FP-6405-24X1.5-12-WO
M-FP-6405-26X1.5-12-WO
M-FP-6405-27X1.5-12-WO
M-FP-6405-27X2.0-12-WO
M-FP-6405-30X1.5-08-WO
M-FP-6405-30X1.5-12-WO
M-FP-6405-33X2.0-12-WO
M-FP-6405-33X2.0-16-WO
M-FP-6405-42X2.0-16-WO




M-MJ-2404 - Str.

- (1) Male 37°
(2) Male Metric (Parallel)
(Some w/ 30° seat and some w/ 24° seat)

M-MJ-2404-04-08X1.0
M-MJ-2404-04-08X1.25
M-MJ-2404-04-10X1.0
M-MJ-2404-04-10X1.25
M-MJ-2404-04-10X1.5
M-MJ-2404-04-12X1.5
M-MJ-2404-04-14X1.5
M-MJ-2404-04-16X1.5
M-MJ-2404-05-10X1.0
M-MJ-2404-06-10X1.0
M-MJ-2404-06-12X1.0
M-MJ-2404-06-12X1.25
M-MJ-2404-06-12X1.5
M-MJ-2404-06-14X1.5
M-MJ-2404-06-16X1.5
M-MJ-2404-06-18X1.5
M-MJ-2404-06-20X1.5
M-MJ-2404-06-22X1.5
M-MJ-2404-08-12X1.5
M-MJ-2404-08-14X1.5
M-MJ-2404-08-16X1.5
M-MJ-2404-08-18X1.5
M-MJ-2404-08-20X1.5
M-MJ-2404-08-22X1.5
M-MJ-2404-08-24X1.5
M-MJ-2404-10-16X1.5
M-MJ-2404-10-18X1.5
M-MJ-2404-10-20X1.5
M-MJ-2404-10-22X1.5
M-MJ-2404-10-24X1.5
M-MJ-2404-10-26X1.5
M-MJ-2404-10-30X2.0
M-MJ-2404-12-22X1.5
M-MJ-2404-12-24X1.5
M-MJ-2404-12-26X1.5
M-MJ-2404-12-30X1.5
M-MJ-2404-12-30X2.0
M-MJ-2404-12-34X1.5
M-MJ-2404-12-36X1.5
M-MJ-2404-12-36X2.0
M-MJ-2404-16-30X1.5
M-MJ-2404-16-36X2.0
M-MJ-2404-16-40X1.5
M-MJ-2404-16-42X2.0
M-MJ-2404-16-45X1.5
M-MJ-2404-20-38X1.5
M-MJ-2404-20-45X2.0
M-MJ-2404-20-48X1.5
M-MJ-2404-24-52X2.0


Styles may vary from picture



M-MJ-6400-DS - Str.

- (1) Male 37°
- (2) Male Metric w/ Bonded Seal

M-MJ-6400-04-10X1.25-DS
M-MJ-6400-04-10X1.5-DS
M-MJ-6400-04-12X1.5-DS
M-MJ-6400-04-14X1.5-DS
M-MJ-6400-04-16X1.5-DS
M-MJ-6400-05-10X1.0-DS
M-MJ-6400-06-10X1.0-DS
M-MJ-6400-06-12X1.0-DS
M-MJ-6400-06-12X1.25-DS
M-MJ-6400-06-12X1.5-DS
M-MJ-6400-06-14X1.5-DS
M-MJ-6400-06-16X1.5-DS
M-MJ-6400-06-18X1.5-DS
M-MJ-6400-06-20X1.5-DS
M-MJ-6400-06-22X1.5-DS
M-MJ-6400-08-12X1.5-DS
M-MJ-6400-08-14X1.5-DS
M-MJ-6400-08-16X1.5-DS
M-MJ-6400-08-18X1.5-DS
M-MJ-6400-08-20X1.5-DS
M-MJ-6400-08-22X1.5-DS
M-MJ-6400-08-24X1.5-DS
M-MJ-6400-10-16X1.5-DS
M-MJ-6400-10-18X1.5-DS
M-MJ-6400-10-20X1.5-DS
M-MJ-6400-10-22X1.5-DS
M-MJ-6400-10-24X1.5-DS
M-MJ-6400-10-26X1.5-DS
M-MJ-6400-12-22X1.5-DS
M-MJ-6400-12-24X1.5-DS
M-MJ-6400-12-26X1.5-DS
M-MJ-6400-12-30X1.5-DS
M-MJ-6400-12-30X2.0-DS
M-MJ-6400-12-36X1.5-DS
M-MJ-6400-12-36X2.0-DS
M-MJ-6400-16-30X1.5-DS
M-MJ-6400-16-30X2.0-DS
M-MJ-6400-16-36X2.0-DS
M-MJ-6400-16-42X2.0-DS
M-MJ-6400-16-45X1.5-DS
M-MJ-6400-20-45X2.0-DS
M-MJ-6400-24-52X2.0-DS




M-MJ-6400-WO - Str.

- (1) Male 37°
- (2) Male Metric w/ Washer & O-Ring

M-MJ-6400-04-08X1.0-WO
M-MJ-6400-04-10X1.0-WO

M-MJ-6400-04-12X1.5-WO
M-MJ-6400-04-14X1.5-WO
M-MJ-6400-04-16X1.5-WO
M-MJ-6400-05-10X1.0-WO
M-MJ-6400-05-12X1.5-WO
M-MJ-6400-05-14X1.5-WO
M-MJ-6400-06-12X1.5-WO
M-MJ-6400-06-14X1.5-WO
M-MJ-6400-06-16X1.5-WO
M-MJ-6400-06-18X1.5-WO
M-MJ-6400-08-12X1.5-WO
M-MJ-6400-08-14X1.5-WO
M-MJ-6400-08-16X1.5-WO
M-MJ-6400-08-18X1.5-WO
M-MJ-6400-08-20X1.5-WO
M-MJ-6400-08-22X1.5-WO
M-MJ-6400-08-24X1.5-WO
M-MJ-6400-10-16X1.5-WO
M-MJ-6400-10-18X1.5-WO
M-MJ-6400-10-20X1.5-WO
M-MJ-6400-10-22X1.5-WO
M-MJ-6400-10-24X1.5-WO
M-MJ-6400-10-26X1.5-WO
M-MJ-6400-12-22X1.5-WO
M-MJ-6400-12-24X1.5-WO
M-MJ-6400-12-26X1.5-WO
M-MJ-6400-12-27X2.0-WO
M-MJ-6400-14-22X1.5-WO
M-MJ-6400-14-26X1.5-WO
M-MJ-6400-16-26X1.5-WO
M-MJ-6400-16-27X2.0-WO
M-MJ-6400-16-33X2.0-WO
M-MJ-6400-20-42X2.0-WO
M-MJ-6400-24-48X2.0-WO




M-MJ-6801-NWO - 90°

- (1) Male 37°
- (2) Male Metric Adj. w/ Washer & O-Ring

M-MJ-6801-04-10X1.0-NWO
M-MJ-6801-04-12X1.5-NWO
M-MJ-6801-04-14X1.5-NWO
M-MJ-6801-05-10X1.0-NWO
M-MJ-6801-05-12X1.5-NWO
M-MJ-6801-05-14X1.5-NWO
M-MJ-6801-06-12X1.5-NWO
M-MJ-6801-06-14X1.5-NWO
M-MJ-6801-06-16X1.5-NWO


M-MJ-6801-06-18X1.5-NWO
M-MJ-6801-08-16X1.5-NWO
M-MJ-6801-08-18X1.5-NWO
M-MJ-6801-08-20X1.5-NWO
M-MJ-6801-08-22X1.5-NWO
M-MJ-6801-10-16X1.5-NWO
M-MJ-6801-10-18X1.5-NWO
M-MJ-6801-10-20X1.5-NWO
M-MJ-6801-10-22X1.5-NWO
M-MJ-6801-12-22X1.5-NWO
M-MJ-6801-12-26X1.5-NWO
M-MJ-6801-12-27X2.0-NWO
M-MJ-6801-14-26X1.5-NWO
M-MJ-6801-16-27X2.0-NWO
M-MJ-6801-16-33X2.0-NWO
M-MJ-6801-20-42X2.0-NWO
M-MJ-6801-24-48X2.0-NWO



M-MJ-6801-L-NWO - 90°

- (1) Male 37°
- (2) Male Metric Adj. w/ Washer & O-Ring - Long

M-MJ-6801-L-08-18X1.5-NWO
M-MJ-6801-L-10-22X1.5-NWO




M-MJ-6802-NWO - 45°

- (1) Male 37°
- (2) Male Metric Adj. w/ Washer & O-Ring

M-MJ-6802-04-10X1.0-NWO
M-MJ-6802-04-12X1.5-NWO
M-MJ-6802-06-14X1.5-NWO
M-MJ-6802-06-16X1.5-NWO
M-MJ-6802-08-16X1.5-NWO
M-MJ-6802-08-18X1.5-NWO
M-MJ-6802-10-18X1.5-NWO
M-MJ-6802-10-22X1.5-NWO
M-MJ-6802-12-22X1.5-NWO
M-MJ-6802-12-27X2.0-NWO
M-MJ-6802-16-27X2.0-NWO
M-MJ-6802-16-33X2.0-NWO

METRIC


Styles may vary from picture



M-MJ-6803-NWO - Tee

- (1) (2) Male 37°
(3) Male Metric Adj. w/ Washer & O-Ring


M-MJ-6803-04-04-10X1.0-NWO
M-MJ-6803-04-04-12X1.5-NWO
M-MJ-6803-06-06-14X1.5-NWO
M-MJ-6803-08-08-16X1.5-NWO
M-MJ-6803-08-08-18X1.5-NWO
M-MJ-6803-10-10-22X1.5-NWO
M-MJ-6803-12-12-27X2.0-NWO
M-MJ-6803-16-16-33X2.0-NWO



M-MJ-6804-NWO - Tee

- (1) (3) Male 37°
(2) Male Metric Adj. w/ Washer & O-Ring


M-MJ-6804-04-10X1.0-04-NWO
M-MJ-6804-04-12X1.5-04-NWO
M-MJ-6804-06-14X1.5-06-NWO
M-MJ-6804-08-16X1.5-08-NWO
M-MJ-6804-08-18X1.5-08-NWO
M-MJ-6804-10-22X1.5-10-NWO
M-MJ-6804-12-27X2.0-12-NWO



M-MP-5405 - Str.

- (1) Male NPT Pipe
(2) Fem. Metric (Parallel)


M-MP-5405-04-14X1.5
M-MP-5405-06-16X1.5
M-MP-5405-06-18X1.5
M-MP-5405-08-22X1.5



M-OFS-6400-EO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric w/ Peflex Seal

M-OFS-6400-04-12X1.5-EO
M-OFS-6400-06-14X1.5-EO
M-OFS-6400-06-16X1.5-EO
M-OFS-6400-08-18X1.5-EO
M-OFS-6400-10-22X1.5-EO
M-OFS-6400-12-27X2.0-EO
M-OFS-6400-16-33X2.0-EO



M-OFS-6400-WO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric w/ Peflex Seal


M-OFS-6400-04-08X1.0-WO
M-OFS-6400-04-10X1.0-WO
M-OFS-6400-04-12X1.5-WO
M-OFS-6400-04-14X1.5-WO
M-OFS-6400-06-12X1.5-WO
M-OFS-6400-06-14X1.5-WO
M-OFS-6400-06-16X1.5-WO
M-OFS-6400-06-18X1.5-WO
M-OFS-6400-08-14X1.5-WO
M-OFS-6400-08-16X1.5-WO
M-OFS-6400-08-22X1.5-WO
M-OFS-6400-08-27X2.0-WO
M-OFS-6400-08-33X2.0-WO
M-OFS-6400-10-16X1.5-WO
M-OFS-6400-10-18X1.5-WO
M-OFS-6400-10-22X1.5-WO
M-OFS-6400-10-27X2.0-WO
M-OFS-6400-12-18X1.5-WO
M-OFS-6400-12-22X1.5-WO
M-OFS-6400-12-26X1.5-WO
M-OFS-6400-12-27X2.0-WO
M-OFS-6400-12-33X2.0-WO
M-OFS-6400-16-27X2.0-WO
M-OFS-6400-16-33X2.0-WO
M-OFS-6400-20-33X2.0-WO
M-OFS-6400-20-42X2.0-WO
M-OFS-6400-24-38X2.0-WO
M-OFS-6400-24-42X2.0-WO



M-OFS-6400-L-WO - Str.

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric w/ Washer & O-Ring

M-OFS-6400-L-06-14X1.5-WO
M-OFS-6400-L-06-16X1.5-WO
M-OFS-6400-L-08-18X1.5-WO
M-OFS-6400-L-10-22X1.5-WO
M-OFS-6400-L-12-27X2.0-WO




M-OFS-6801-NWO - 90°

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric Adj. w/ Washer O-Ring

M-OFS-6801-04-12X1.5-NWO
M-OFS-6801-04-14X1.5-NWO
M-OFS-6801-06-10X1.5-NWO
M-OFS-6801-06-12X1.5-NWO
M-OFS-6801-06-14X1.5-NWO
M-OFS-6801-06-16X1.5-NWO
M-OFS-6801-06-18X1.5-NWO
M-OFS-6801-08-12X1.5-NWO
M-OFS-6801-08-14X1.5-NWO
M-OFS-6801-08-16X1.5-NWO
M-OFS-6801-08-18X1.5-NWO
M-OFS-6801-08-22X1.5-NWO
M-OFS-6801-08-27X2.0-NWO
M-OFS-6801-10-18X1.5-NWO
M-OFS-6801-10-22X1.5-NWO
M-OFS-6801-10-27X2.0-NWO
M-OFS-6801-12-22X1.5-NWO
M-OFS-6801-12-27X2.0-NWO
M-OFS-6801-16-27X2.0-NWO
M-OFS-6801-16-33X2.0-NWO
M-OFS-6801-20-33X2.0-NWO
M-OFS-6801-20-42X2.0-NWO

METRIC


Styles may vary from picture



M-OFS-6801-NWO-ISO - 90°

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric Adj. w/ Washer ISO O-Ring 6149


M-OFS-6801-04-12X1.5-NWO-ISO
M-OFS-6801-06-12X1.5-NWO-ISO
M-OFS-6801-06-14X1.5-NWO-ISO
M-OFS-6801-06-16X1.5-NWO-ISO
M-OFS-6801-08-14X1.5-NWO-ISO
M-OFS-6801-08-18X1.5-NWO-ISO
M-OFS-6801-08-22X1.5-NWO-ISO
M-OFS-6801-10-18X1.5-NWO-ISO
M-OFS-6801-10-22X1.5-NWO-ISO
M-OFS-6801-12-22X1.5-NWO-ISO
M-OFS-6801-12-27X2.0-NWO-ISO
M-OFS-6801-16-33X2.0-NWO-ISO
M-OFS-6801-20-42X2.0-NWO-ISO



M-OFS-6802-NWO-ISO - 45°

- (1) Male O-Ring Face Seal (SAE)
(2) Male Metric Adj. w/ Washer ISO O-Ring 6149


M-OFS-6802-04-12X1.5-NWO-ISO
M-OFS-6802-04-14X1.5-NWO-ISO
M-OFS-6802-06-16X1.5-NWO-ISO
M-OFS-6802-08-18X1.5-NWO-ISO
M-OFS-6802-10-22X1.5-NWO-ISO
M-OFS-6802-12-27X2.0-NWO-ISO



M-OFS-6803-NWO-ISO - Tee

- (1) (2) Male O-Ring Face Seal (SAE)
(3) Male Metric Adj. w/ Washer ISO O-Ring 6149

M-OFS-6803-04-14X1.5-NWO-ISO
M-OFS-6803-08-18X1.5-NWO-ISO
M-OFS-6803-10-22X1.5-NWO-ISO
M-OFS-6803-16-33X2.0-NWO-ISO



M-OFS-6804-NWO - Tee

- (1) (3) Male O-Ring Face Seal (SAE)
(2) Male Metric Adj. w/ Washer O-Ring

M-OFS-6804-04-10X1.0-04-NWO
M-OFS-6804-04-12X1.5-04-NWO
M-OFS-6804-06-16X1.5-06-NWO
M-OFS-6804-08-14X1.5-08-NWO
M-OFS-6804-08-16X1.5-08-NWO
M-OFS-6804-08-18X1.5-08-NWO
M-OFS-6804-10-22X1.5-10-NWO
M-OFS-6804-12-27X2.0-12-NWO
M-OFS-6804-20-42X2.0-20-NWO



M-SBT-2404 - Str.

- (1) Male 37°
(2) Metric O-Ring Bump Tube Port Adapter

M-SBT-2404-06-14X1.5
M-SBT-2404-06-16X1.5
M-SBT-2404-06-18X1.5

METRIC FLARELESS

Styles may vary from picture



MFL-0304-C
Cap Nut
Light

MFL-0304-C-06
MFL-0304-C-08
MFL-0304-C-10
MFL-0304-C-12
MFL-0304-C-15
MFL-0304-C-18
MFL-0304-C-22
MFL-0304-C-28
MFL-0304-C-35
MFL-0304-C-42



MFL-0304-C-H
Cap Nut
Heavy

MFL-0304-C-H-06
MFL-0304-C-H-08
MFL-0304-C-H-10
MFL-0304-C-H-12
MFL-0304-C-H-14
MFL-0304-C-H-16
MFL-0304-C-H-20
MFL-0304-C-H-25
MFL-0304-C-H-30
MFL-0304-C-H-38



MFL-0306
Bulkhead Lock Nut
Light

MFL-0306-06
MFL-0306-08
MFL-0306-10
MFL-0306-12
MFL-0306-15
MFL-0306-18
MFL-0306-22
MFL-0306-28
MFL-0306-35
MFL-0306-42



MFL-0306-H
Bulkhead Lock Nut
Heavy

MFL-0306-H-06
MFL-0306-H-08
MFL-0306-H-10
MFL-0306-H-12
MFL-0306-H-14
MFL-0306-H-16
MFL-0306-H-20
MFL-0306-H-25
MFL-0306-H-30
MFL-0306-H-38



MFL-0318-LL
Flareless Nut
Extra Light

MFL-0318-LL-04
MFL-0318-LL-06
MFL-0318-LL-08
MFL-0318-LL-10
MFL-0318-LL-12



MFL-0318
Flareless Nut
Light

MFL-0318-06
MFL-0318-08
MFL-0318-10
MFL-0318-12
MFL-0318-15
MFL-0318-18
MFL-0318-22
MFL-0318-28
MFL-0318-35
MFL-0318-42



MFL-0318-H
Flareless Nut
Heavy

MFL-0318-H-06
MFL-0318-H-08
MFL-0318-H-10
MFL-0318-H-12
MFL-0318-H-14
MFL-0318-H-16
MFL-0318-H-20
MFL-0318-H-25
MFL-0318-H-30
MFL-0318-H-38



MFL-0319-LL
Flareless Sleeve
Extra Light

MFL-0319-LL-04
MFL-0319-LL-06
MFL-0319-LL-08
MFL-0319-LL-10
MFL-0319-LL-12



MFL-0319
Flareless Sleeve
Light

MFL-0319-06
MFL-0319-08
MFL-0319-10
MFL-0319-12
MFL-0319-15
MFL-0319-18
MFL-0319-22
MFL-0319-28
MFL-0319-35
MFL-0319-42

METRIC FLARELESS

Styles may vary from picture



MFL-0319-H
Flareless Sleeve
Heavy

MFL-0319-H-06
MFL-0319-H-08
MFL-0319-H-10
MFL-0319-H-12
MFL-0319-H-14
MFL-0319-H-16
MFL-0319-H-20
MFL-0319-H-25
MFL-0319-H-30
MFL-0319-H-38



MFL-0320
Blanking Plug w/ O-Ring
Light

MFL-0320-06
MFL-0320-08
MFL-0320-10
MFL-0320-12
MFL-0320-15
MFL-0320-18
MFL-0320-22
MFL-0320-28
MFL-0320-35
MFL-0320-42



MFL-0320-H
Blanking Plug w/ O-Ring
Heavy

MFL-0320-H-06
MFL-0320-H-08
MFL-0320-H-10
MFL-0320-H-12
MFL-0320-H-14
MFL-0320-H-16
MFL-0320-H-20
MFL-0320-H-25
MFL-0320-H-30
MFL-0320-H-38



MFL-2403-LL - Str.
(1) (2) Male Flareless Union
Extra Light

MFL-2403-LL-04-04
MFL-2403-LL-06-04
MFL-2403-LL-06-06
MFL-2403-LL-08-04
MFL-2403-LL-08-06
MFL-2403-LL-08-08
MFL-2403-LL-10-10
MFL-2403-LL-12-12



MFL-2403 - Str.
(1) (2) Male Flareless Union
Light

MFL-2403-06-06
MFL-2403-08-06
MFL-2403-08-08
MFL-2403-10-06
MFL-2403-10-08
MFL-2403-10-10
MFL-2403-12-06
MFL-2403-12-08
MFL-2403-12-10
MFL-2403-12-12
MFL-2403-15-10
MFL-2403-15-12
MFL-2403-15-15
MFL-2403-18-10
MFL-2403-18-12
MFL-2403-18-15
MFL-2403-18-18
MFL-2403-22-12
MFL-2403-22-15
MFL-2403-22-18
MFL-2403-22-22
MFL-2403-28-18
MFL-2403-28-22
MFL-2403-28-28
MFL-2403-35-22
MFL-2403-35-28
MFL-2403-35-35
MFL-2403-42-35
MFL-2403-42-42




MFL-2403-H - Str.
(1) (2) Male Flareless Union
Heavy

MFL-2403-H-06-06
MFL-2403-H-08-06
MFL-2403-H-08-08
MFL-2403-H-10-06
MFL-2403-H-10-08
MFL-2403-H-10-10
MFL-2403-H-12-06
MFL-2403-H-12-08
MFL-2403-H-12-10
MFL-2403-H-12-12
MFL-2403-H-14-12
MFL-2403-H-14-14
MFL-2403-H-16-10
MFL-2403-H-16-12
MFL-2403-H-16-14
MFL-2403-H-16-16
MFL-2403-H-20-10
MFL-2403-H-20-12
MFL-2403-H-20-16
MFL-2403-H-20-20
MFL-2403-H-25-16
MFL-2403-H-25-20
MFL-2403-H-25-25
MFL-2403-H-30-20
MFL-2403-H-30-25
MFL-2403-H-30-30
MFL-2403-H-38-30
MFL-2403-H-38-38

METRIC FLARELESS

Styles may vary from picture




MFL-2406 - Str. - Reducer

(1) Metric Standpipe
(2) Male Flareless

Light

MFL-2406-08-06
MFL-2406-10-06
MFL-2406-10-08
MFL-2406-12-06
MFL-2406-12-08
MFL-2406-12-10
MFL-2406-15-06
MFL-2406-15-08
MFL-2406-15-10
MFL-2406-15-12
MFL-2406-18-06
MFL-2406-18-08
MFL-2406-18-10
MFL-2406-18-12
MFL-2406-18-15
MFL-2406-22-06
MFL-2406-22-08
MFL-2406-22-10
MFL-2406-22-12
MFL-2406-22-15
MFL-2406-22-18
MFL-2406-28-06
MFL-2406-28-08
MFL-2406-28-10
MFL-2406-28-12
MFL-2406-28-15
MFL-2406-28-18
MFL-2406-28-22
MFL-2406-35-15
MFL-2406-35-18
MFL-2406-35-22
MFL-2406-35-28
MFL-2406-42-15
MFL-2406-42-18
MFL-2406-42-22
MFL-2406-42-28
MFL-2406-42-35



MFL-2406-H - Str. - Reducer

(1) Metric Standpipe
(2) Male Flareless

Heavy

MFL-2406-H-08-06
MFL-2406-H-10-06
MFL-2406-H-10-08
MFL-2406-H-12-06

MFL-2406-H-12-08
MFL-2406-H-12-10
MFL-2406-H-14-06
MFL-2406-H-14-08
MFL-2406-H-14-10
MFL-2406-H-14-12
MFL-2406-H-16-06
MFL-2406-H-16-08
MFL-2406-H-16-10
MFL-2406-H-16-12
MFL-2406-H-16-14
MFL-2406-H-20-06
MFL-2406-H-20-08
MFL-2406-H-20-10
MFL-2406-H-20-12
MFL-2406-H-20-14
MFL-2406-H-20-16
MFL-2406-H-25-08
MFL-2406-H-25-10
MFL-2406-H-25-12
MFL-2406-H-25-14
MFL-2406-H-25-16
MFL-2406-H-25-20
MFL-2406-H-30-08
MFL-2406-H-30-10
MFL-2406-H-30-12
MFL-2406-H-30-14
MFL-2406-H-30-16
MFL-2406-H-30-20
MFL-2406-H-30-25
MFL-2406-H-38-12
MFL-2406-H-38-16
MFL-2406-H-38-20
MFL-2406-H-38-25
MFL-2406-H-38-30



MFL-2408

(1) Male Flareless Plug
Light


MFL-2408-06
MFL-2408-08
MFL-2408-10
MFL-2408-12
MFL-2408-15
MFL-2408-18
MFL-2408-22
MFL-2408-28
MFL-2408-35
MFL-2408-42



MFL-2408-H

(1) Male Flareless Plug
Heavy


MFL-2408-H-06
MFL-2408-H-08
MFL-2408-H-10
MFL-2408-H-12
MFL-2408-H-14
MFL-2408-H-16
MFL-2408-H-20
MFL-2408-H-25
MFL-2408-H-30
MFL-2408-H-38



MFL-2500-LL - 90°

(1) (2) Male Flareless
Extra Light

MFL-2500-LL-04-04
MFL-2500-LL-06-06
MFL-2500-LL-08-08
MFL-2500-LL-10-10
MFL-2500-LL-12-12




MFL-2500 - 90°

(1) Male Flareless Plug
Light

MFL-2500-06-06
MFL-2500-08-08
MFL-2500-10-10
MFL-2500-12-12
MFL-2500-15-15
MFL-2500-18-18
MFL-2500-22-22
MFL-2500-28-28
MFL-2500-35-35
MFL-2500-42-42


METRIC FLARELESS

Styles may vary from picture




MFL-2500-H - 90°
(1) (2) Male Flareless
Heavy

MFL-2500-H-06-06
MFL-2500-H-08-08
MFL-2500-H-10-10
MFL-2500-H-12-12
MFL-2500-H-14-14
MFL-2500-H-16-16
MFL-2500-H-20-20
MFL-2500-H-25-25
MFL-2500-H-30-30
MFL-2500-H-38-38

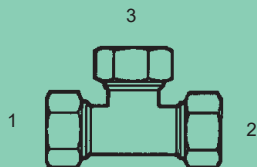

MFL-2603-LL - Tee
(1) (2) (3) Male Flareless
Extra Light


MFL-2603-LL-04-04-04
MFL-2603-LL-06-06-06
MFL-2603-LL-08-08-08
MFL-2603-LL-10-10-10
MFL-2603-LL-12-12-12

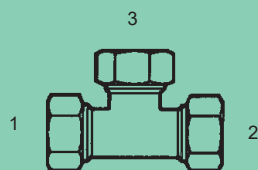

MFL-2603 - Tee
(1) (2) (3) Male Flareless
Light


MFL-2603-06-06-06
MFL-2603-06-06-08
MFL-2603-06-06-10
MFL-2603-08-08-06
MFL-2603-08-08-08
MFL-2603-08-08-10
MFL-2603-08-08-12
MFL-2603-10-06-10
MFL-2603-10-10-06
MFL-2603-10-10-08
MFL-2603-10-10-10
MFL-2603-10-10-15

MFL-2603-12-08-08
MFL-2603-12-10-10
MFL-2603-12-10-12
MFL-2603-12-12-08
MFL-2603-12-12-10
MFL-2603-12-12-12
MFL-2603-12-12-15
MFL-2603-12-12-18
MFL-2603-15-12-12
MFL-2603-15-15-06
MFL-2603-15-15-10
MFL-2603-15-15-12
MFL-2603-15-15-15
MFL-2603-18-10-10
MFL-2603-18-10-18
MFL-2603-18-18-10
MFL-2603-18-18-12
MFL-2603-18-18-15
MFL-2603-18-18-18
MFL-2603-22-18-18
MFL-2603-22-22-12
MFL-2603-22-22-15
MFL-2603-22-22-18
MFL-2603-22-22-22
MFL-2603-28-28-10
MFL-2603-28-28-12
MFL-2603-28-28-18
MFL-2603-28-28-22
MFL-2603-28-28-28
MFL-2603-35-35-35
MFL-2603-42-42-42

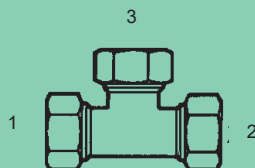


MFL-2603-H - Tee
(1) (2) (3) Male Flareless
Heavy

MFL-2603-H-06-06-06
MFL-2603-H-08-08-08
MFL-2603-H-10-10-10
MFL-2603-H-12-12-12
MFL-2603-H-12-12-16
MFL-2603-H-14-14-14
MFL-2603-H-16-16-08
MFL-2603-H-16-16-12
MFL-2603-H-16-16-16
MFL-2603-H-16-16-20
MFL-2603-H-20-20-10
MFL-2603-H-20-20-12
MFL-2603-H-20-20-16
MFL-2603-H-20-20-20
MFL-2603-H-20-20-25
MFL-2603-H-25-25-16
MFL-2603-H-25-25-20
MFL-2603-H-25-25-25
MFL-2603-H-30-30-30
MFL-2603-H-38-38-38

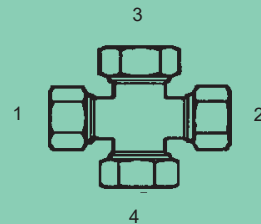


MFL-2650-LL - Cross
(1) (2) (3) (4) Male Flareless
Extra Light

MFL-2650-LL-04-04-04-04
MFL-2650-LL-06-06-06-06
MFL-2650-LL-08-08-08-08

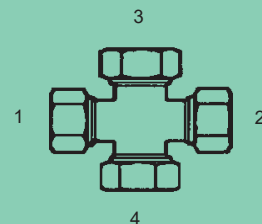

MFL-2650 - Cross
(1) (2) (3) (4) Male Flareless
Light

MFL-2650-06-06-06-06
MFL-2650-08-08-08-08
MFL-2650-10-10-10-10
MFL-2650-12-12-12-12
MFL-2650-15-15-15-15
MFL-2650-18-18-18-18
MFL-2650-22-22-22-22
MFL-2650-28-28-28-28
MFL-2650-35-35-35-35
MFL-2650-42-42-42-42

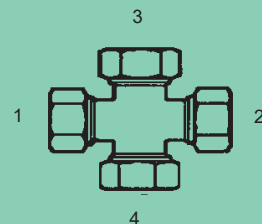


MFL-2650-H - Cross
(1) (2) (3) (4) Male Flareless
Heavy

MFL-2650-H-06-06-06-06
MFL-2650-H-08-08-08-08
MFL-2650-H-10-10-10-10
MFL-2650-H-12-12-12-12
MFL-2650-H-14-14-14-14
MFL-2650-H-16-16-16-16
MFL-2650-H-20-20-20-20
MFL-2650-H-25-25-25-25
MFL-2650-H-30-30-30-30
MFL-2650-H-38-38-38-38

METRIC FLARELESS


Styles may vary from picture



MFL-2700-LN - Str.

- (1) Male Flareless
(2) Male Flareless Bulkhead w/ Lock Nut
Light

MFL-2700-LN-06-06
MFL-2700-LN-08-08
MFL-2700-LN-10-10
MFL-2700-LN-12-12
MFL-2700-LN-15-15
MFL-2700-LN-18-18
MFL-2700-LN-22-22
MFL-2700-LN-28-28
MFL-2700-LN-35-35
MFL-2700-LN-42-42



MFL-2700-H-LN - Str.

- (1) Male Flareless
(2) Male Flareless Bulkhead w/ Lock Nut
Heavy

MFL-2700-H-LN-06-06
MFL-2700-H-LN-08-08
MFL-2700-H-LN-10-10
MFL-2700-H-LN-12-12
MFL-2700-H-LN-14-14
MFL-2700-H-LN-16-16
MFL-2700-H-LN-20-20
MFL-2700-H-LN-25-25
MFL-2700-H-LN-30-30
MFL-2700-H-LN-38-38



MFL-2701-LN - Str.

- (1) Male Flareless
(2) Male Flareless Bulkhead w/ Lock Nut
Light


MFL-2701-LN-06-06
MFL-2701-LN-08-08
MFL-2701-LN-10-10
MFL-2701-LN-12-12
MFL-2701-LN-15-15
MFL-2701-LN-18-18
MFL-2701-LN-22-22
MFL-2701-LN-28-28
MFL-2701-LN-35-35
MFL-2701-LN-42-42



MFL-2701-H-LN - 90°

- (1) Male Flareless
(2) Male Flareless Bulkhead w/ Lock Nut
Light


MFL-2701-H-LN-06-06
MFL-2701-H-LN-08-08
MFL-2701-H-LN-10-10
MFL-2701-H-LN-12-12
MFL-2701-H-LN-14-14
MFL-2701-H-LN-16-16
MFL-2701-H-LN-20-20
MFL-2701-H-LN-25-25
MFL-2701-H-LN-30-30
MFL-2701-H-LN-38-38



MFL-6500 - 90°

- (1) Male Flareless
(2) Fem. Flareless Swivel
Light


MFL-6500-06-06
MFL-6500-08-08
MFL-6500-10-10
MFL-6500-12-12
MFL-6500-15-15
MFL-6500-18-18
MFL-6500-22-22
MFL-6500-28-28
MFL-6500-35-35
MFL-6500-42-42



MFL-6500-H - 90°

- (1) Male Flareless
(2) Fem. Flareless Swivel
Heavy


MFL-6500-H-06-06
MFL-6500-H-08-08
MFL-6500-H-10-10
MFL-6500-H-12-12
MFL-6500-H-14-14
MFL-6500-H-16-16
MFL-6500-H-20-20
MFL-6500-H-25-25
MFL-6500-H-30-30
MFL-6500-H-38-38



MFL-6565 - Str.

- (1) (2) Fem. Flareless Swivel
Light


MFL-6565-06-06
MFL-6565-08-08
MFL-6565-10-10
MFL-6565-12-12
MFL-6565-15-15
MFL-6565-18-18
MFL-6565-22-22
MFL-6565-28-28
MFL-6565-35-35
MFL-6565-42-42



MFL-6565-H - Str.

- (1) (2) Fem. Flareless Swivel
Heavy

MFL-6565-H-06-06
MFL-6565-H-08-08
MFL-6565-H-10-10
MFL-6565-H-12-12
MFL-6565-H-14-14
MFL-6565-H-16-16
MFL-6565-H-20-20
MFL-6565-H-25-25
MFL-6565-H-30-30
MFL-6565-H-38-38




MFL-6600 - Tee

- (1) (2) Male Flareless
(3) Fem. Flareless Swivel
Light

MFL-6600-06-06-06
MFL-6600-08-08-08
MFL-6600-10-10-10
MFL-6600-12-12-12
MFL-6600-15-15-15
MFL-6600-18-18-18
MFL-6600-22-22-22
MFL-6600-28-28-28
MFL-6600-35-35-35
MFL-6600-42-42-42


METRIC FLARELESS

Styles may vary from picture

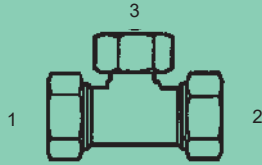


MFL-6600-H - Tee
(1) (2) Male Flareless
(3) Fem. Flareless Swivel
Heavy

MFL-6600-H-06-06-06
MFL-6600-H-08-08-08
MFL-6600-H-10-10-10
MFL-6600-H-12-12-12
MFL-6600-H-14-14-14
MFL-6600-H-16-16-16
MFL-6600-H-20-20-20
MFL-6600-H-25-25-25
MFL-6600-H-30-30-30
MFL-6600-H-38-38-38

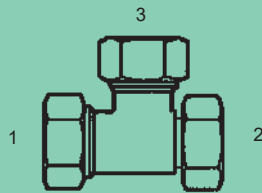

MFL-6602 - Tee
(1) (3) Male Flareless
(2) Fem. Flareless Swivel
Light

MFL-6602-06-06-06
MFL-6602-08-08-08
MFL-6602-10-10-10
MFL-6602-12-12-12
MFL-6602-15-15-15
MFL-6602-18-18-18
MFL-6602-22-22-22
MFL-6602-28-28-28
MFL-6602-35-35-35
MFL-6602-42-42-42

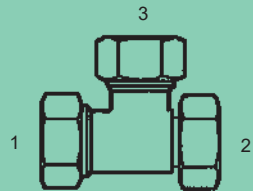

MFL-6602-H - Tee
(1) (3) Male Flareless
(2) Fem. Flareless Swivel
Heavy

MFL-6602-H-06-06-06
MFL-6602-H-08-08-08
MFL-6602-H-10-10-10
MFL-6602-H-12-12-12
MFL-6602-H-14-14-14
MFL-6602-H-16-16-16
MFL-6602-H-20-20-20
MFL-6602-H-25-25-25
MFL-6602-H-30-30-30
MFL-6602-H-38-38-38



MFL-BPP-2404 - Str.
(1) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Light

MFL-BPP-2404-06-02
MFL-BPP-2404-06-04
MFL-BPP-2404-06-06
MFL-BPP-2404-06-08
MFL-BPP-2404-08-02
MFL-BPP-2404-08-04
MFL-BPP-2404-08-06
MFL-BPP-2404-08-08
MFL-BPP-2404-10-04
MFL-BPP-2404-10-06
MFL-BPP-2404-10-08
MFL-BPP-2404-12-04
MFL-BPP-2404-12-06
MFL-BPP-2404-12-08
MFL-BPP-2404-12-12
MFL-BPP-2404-15-06
MFL-BPP-2404-15-08
MFL-BPP-2404-15-12
MFL-BPP-2404-18-06
MFL-BPP-2404-18-08
MFL-BPP-2404-18-12
MFL-BPP-2404-22-08
MFL-BPP-2404-22-12
MFL-BPP-2404-22-16
MFL-BPP-2404-28-08
MFL-BPP-2404-28-12
MFL-BPP-2404-28-16
MFL-BPP-2404-35-16
MFL-BPP-2404-35-20
MFL-BPP-2404-42-24



MFL-BPP-2404-H - Str.
(1) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Heavy

MFL-BPP-2404-H-06-04
MFL-BPP-2404-H-06-08
MFL-BPP-2404-H-08-04
MFL-BPP-2404-H-08-06
MFL-BPP-2404-H-10-04
MFL-BPP-2404-H-10-06
MFL-BPP-2404-H-10-08
MFL-BPP-2404-H-12-04
MFL-BPP-2404-H-12-06
MFL-BPP-2404-H-12-08
MFL-BPP-2404-H-14-06
MFL-BPP-2404-H-14-08
MFL-BPP-2404-H-16-06
MFL-BPP-2404-H-16-08
MFL-BPP-2404-H-16-12
MFL-BPP-2404-H-20-08
MFL-BPP-2404-H-20-12
MFL-BPP-2404-H-25-12
MFL-BPP-2404-H-25-16
MFL-BPP-2404-H-30-16
MFL-BPP-2404-H-30-20
MFL-BPP-2404-H-38-20
MFL-BPP-2404-H-38-24

METRIC FLARELESS

Styles may vary from picture




MFL-BPP-2405 - Str.
(1) Male Flareless
(2) Fem. BPP - Rigid
Light

MFL-BPP-2405-06-02
MFL-BPP-2405-08-04
MFL-BPP-2405-08-06
MFL-BPP-2405-08-08
MFL-BPP-2405-10-04
MFL-BPP-2405-10-06
MFL-BPP-2405-10-08
MFL-BPP-2405-12-06
MFL-BPP-2405-12-08
MFL-BPP-2405-15-08
MFL-BPP-2405-18-08
MFL-BPP-2405-22-12
MFL-BPP-2405-28-16
MFL-BPP-2405-35-20
MFL-BPP-2405-42-24




MFL-BPP-2405-H - Str.
(1) Male Flareless
(2) Fem. BPP - Rigid
Heavy

MFL-BPP-2405-H-06-04
MFL-BPP-2405-H-08-04
MFL-BPP-2405-H-10-06
MFL-BPP-2405-H-12-06
MFL-BPP-2405-H-14-08
MFL-BPP-2405-H-16-08
MFL-BPP-2405-H-20-12
MFL-BPP-2405-H-25-16
MFL-BPP-2405-H-30-20
MFL-BPP-2405-H-38-24




MFL-BPP-2501 - 90°
(1) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Light

MFL-BPP-2501-22-12
MFL-BPP-2501-28-16
MFL-BPP-2501-35-20
MFL-BPP-2501-42-24




MFL-BPP-2501-H - 90°
(1) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Heavy

MFL-BPP-2501-H-20-12
MFL-BPP-2501-H-25-16
MFL-BPP-2501-H-30-20
MFL-BPP-2501-H-38-24

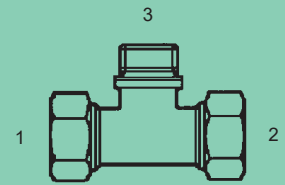


MFL-BPP-2601 - Tee
(1) (2) Male Flareless
(3) Male BPP w/ Cutting Face Seal
Light

MFL-BPP-2601-22-22-12
MFL-BPP-2601-28-28-16
MFL-BPP-2601-35-35-20

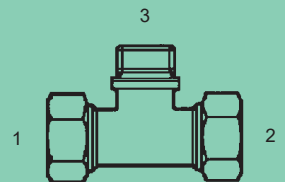


MFL-BPP-2601-H - Tee
(1) (3) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Heavy

MFL-BPP-2601-H-20-20-12
MFL-BPP-2601-H-25-25-16
MFL-BPP-2601-H-30-30-20

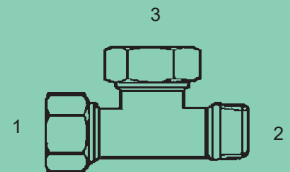

MFL-BPP-2605 - Tee
(1) (3) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Light

MFL-BPP-2605-22-12-22
MFL-BPP-2605-28-16-28

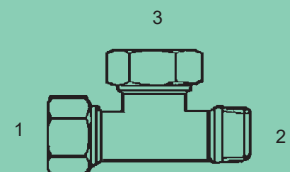


MFL-BPP-2605-H - Tee
(1) (3) Male Flareless
(2) Male BPP w/ Cutting Face Seal
Heavy

MFL-BPP-2605-H-20-12-20 374.15
MFL-BPP-2605-H-25-16-25 419.25
MFL-BPP-2605-H-30-20-30 665.05

METRIC FLARELESS

Styles may vary from picture



MFL-BPP-6400-EO - Str.

- (1) Male Flareless
(2) Male BPP w/ Peflex Seal
Light

MFL-BPP-6400-04-02-EO
MFL-BPP-6400-06-02-EO
MFL-BPP-6400-06-04-EO
MFL-BPP-6400-06-06-EO
MFL-BPP-6400-08-02-EO
MFL-BPP-6400-08-04-EO
MFL-BPP-6400-08-06-EO
MFL-BPP-6400-08-08-EO
MFL-BPP-6400-10-04-EO
MFL-BPP-6400-10-06-EO
MFL-BPP-6400-10-08-EO
MFL-BPP-6400-12-04-EO
MFL-BPP-6400-12-06-EO
MFL-BPP-6400-12-08-EO
MFL-BPP-6400-12-12-EO
MFL-BPP-6400-15-06-EO
MFL-BPP-6400-15-08-EO
MFL-BPP-6400-15-12-EO
MFL-BPP-6400-18-06-EO
MFL-BPP-6400-18-08-EO
MFL-BPP-6400-18-12-EO
MFL-BPP-6400-22-08-EO
MFL-BPP-6400-22-12-EO
MFL-BPP-6400-22-16-EO
MFL-BPP-6400-28-12-EO
MFL-BPP-6400-28-16-EO
MFL-BPP-6400-35-16-EO
MFL-BPP-6400-35-20-EO
MFL-BPP-6400-42-24-EO




MFL-BPP-6400-H-EO - Str.

- (1) Male Flareless
(2) Male BPP w/ Peflex Seal
Heavy

MFL-BPP-6400-H-06-04-EO
MFL-BPP-6400-H-08-04-EO
MFL-BPP-6400-H-08-06-EO
MFL-BPP-6400-H-10-04-EO
MFL-BPP-6400-H-10-06-EO
MFL-BPP-6400-H-10-08-EO
MFL-BPP-6400-H-12-04-EO
MFL-BPP-6400-H-12-06-EO
MFL-BPP-6400-H-12-08-EO
MFL-BPP-6400-H-14-06-EO
MFL-BPP-6400-H-14-08-EO
MFL-BPP-6400-H-16-06-EO


MFL-BPP-6400-H-16-08-EO
MFL-BPP-6400-H-16-12-EO
MFL-BPP-6400-H-20-08-EO
MFL-BPP-6400-H-20-12-EO
MFL-BPP-6400-H-25-08-EO
MFL-BPP-6400-H-25-12-EO
MFL-BPP-6400-H-25-16-EO
MFL-BPP-6400-H-30-16-EO
MFL-BPP-6400-H-30-20-EO
MFL-BPP-6400-H-38-20-EO
MFL-BPP-6400-H-38-24-EO



MFL-BPP-6510 - Str.

- (1) Female Flareless Swivel
(2) Male BPP w/ Cutting Face Seal
Light


MFL-BPP-6510-06-02
MFL-BPP-6510-06-04
MFL-BPP-6510-10-04
MFL-BPP-6510-12-06
MFL-BPP-6510-15-08
MFL-BPP-6510-18-08
MFL-BPP-6510-22-12
MFL-BPP-6510-28-16
MFL-BPP-6510-35-20
MFL-BPP-6510-42-24



MFL-BPP-6510-H - Str.

- (1) Fem. Flareless Swivel
(2) Male BPP - Cutting Face Seal
Heavy


MFL-BPP-6510-H-06-04
MFL-BPP-6510-H-08-04
MFL-BPP-6510-H-10-06
MFL-BPP-6510-H-12-06
MFL-BPP-6510-H-14-08
MFL-BPP-6510-H-16-08
MFL-BPP-6510-H-20-12
MFL-BPP-6510-H-25-16
MFL-BPP-6510-H-30-20
MFL-BPP-6510-H-38-24



MFL-BPP-6510-EO - Str.

- (1) Fem. Flareless Swivel
(2) Male BPP - w/ Peflex Seal
Light


MFL-BPP-6510-06-02-EO
MFL-BPP-6510-08-04-EO
MFL-BPP-6510-10-04-EO
MFL-BPP-6510-12-04-EO
MFL-BPP-6510-12-06-EO
MFL-BPP-6510-15-08-EO
MFL-BPP-6510-18-08-EO
MFL-BPP-6510-22-12-EO
MFL-BPP-6510-28-16-EO
MFL-BPP-6510-35-20-EO
MFL-BPP-6510-42-24-EO



MFL-BPP-6510-H-EO - Str.

- (1) Fem. Flareless Swivel
(2) Male BPP - w/ Peflex Seal
Heavy

MFL-BPP-6510-H-06-04-EO
MFL-BPP-6510-H-08-04-EO
MFL-BPP-6510-H-10-06-EO
MFL-BPP-6510-H-12-06-EO
MFL-BPP-6510-H-12-08-EO
MFL-BPP-6510-H-14-08-EO
MFL-BPP-6510-H-16-08-EO
MFL-BPP-6510-H-20-12-EO
MFL-BPP-6510-H-25-16-EO
MFL-BPP-6510-H-30-20-EO
MFL-BPP-6510-H-38-24-EO




MFL-BPP-6801-NWO - 90°

- (1) Male Flareless
(2) Male BPP w/ Washer O-Ring
Light

MFL-BPP-6801-06-02-NWO
MFL-BPP-6801-08-04-NWO
MFL-BPP-6801-10-04-NWO
MFL-BPP-6801-12-06-NWO
MFL-BPP-6801-15-08-NWO
MFL-BPP-6801-18-08-NWO
MFL-BPP-6801-22-12-NWO
MFL-BPP-6801-28-16-NWO

METRIC FLARELESS


Styles may vary from picture



MFL-BPP-6801-H-NWO - 90°

- (1) Male Flareless
(2) Male BPP w/ Washer O-Ring
Heavy

MFL-BPP-6801-H-06-04-NWO
MFL-BPP-6801-H-08-04-NWO
MFL-BPP-6801-H-10-06-NWO
MFL-BPP-6801-H-12-06-NWO
MFL-BPP-6801-H-16-08-NWO
MFL-BPP-6801-H-20-12-NWO
MFL-BPP-6801-H-30-20-NWO



MFL-BPP-6810-NWO - 45°

- (1) Male Flareless
(2) Male BPP w/ Washer O-Ring
Light


MFL-BPP-6810-08-04-NWO
MFL-BPP-6810-10-04-NWO
MFL-BPP-6810-12-06-NWO



MFL-BST-2404-LL - Str.

- (1) Male Flareless
(2) Male BSPT
Extra Light

MFL-BST-2404-LL-04-02
MFL-BST-2404-LL-06-02
MFL-BST-2404-LL-08-02
MFL-BST-2404-LL-08-04
MFL-BST-2404-LL-10-04
MFL-BST-2404-LL-12-04
MFL-BST-2404-LL-12-06



MFL-BST-2404 - Str.

- (1) Male Flareless
(2) Male BSPT
Light


MFL-BST-2404-06-02
MFL-BST-2404-06-04
MFL-BST-2404-08-04
MFL-BST-2404-10-04
MFL-BST-2404-12-04
MFL-BST-2404-12-06
MFL-BST-2404-12-08
MFL-BST-2404-15-06
MFL-BST-2404-15-08
MFL-BST-2404-18-08
MFL-BST-2404-22-12
MFL-BST-2404-28-16



MFL-BST-2404-H - Str.

- (1) Male Flareless
(2) Male BSPT
Heavy


MFL-BST-2404-H-06-04
MFL-BST-2404-H-08-04
MFL-BST-2404-H-10-06
MFL-BST-2404-H-12-06
MFL-BST-2404-H-14-08
MFL-BST-2404-H-16-08
MFL-BST-2404-H-20-12



MFL-BST-2501-LL - 90°

- (1) Male Flareless
(2) Male BSPT
Extra Light


MFL-BST-2501-LL-04-02
MFL-BST-2501-LL-06-02
MFL-BST-2501-LL-08-02
MFL-BST-2501-LL-10-04
MFL-BST-2501-LL-12-04



MFL-BST-2501 - 90°

- (1) Male Flareless
(2) Male BSPT
Light


MFL-BST-2501-06-02
MFL-BST-2501-08-04
MFL-BST-2501-08-06
MFL-BST-2501-10-04
MFL-BST-2501-10-06
MFL-BST-2501-12-04
MFL-BST-2501-12-06
MFL-BST-2501-12-08
MFL-BST-2501-15-08
MFL-BST-2501-18-08
MFL-BST-2501-22-12
MFL-BST-2501-28-16
MFL-BST-2501-35-20



MFL-BST-2501-H - 90°

- (1) Male Flareless
(2) Male BSPT
Heavy

MFL-BST-2501-H-06-04
MFL-BST-2501-H-08-04
MFL-BST-2501-H-10-06
MFL-BST-2501-H-12-06
MFL-BST-2501-H-12-08
MFL-BST-2501-H-14-08
MFL-BST-2501-H-16-08
MFL-BST-2501-H-20-12
MFL-BST-2501-H-25-16




MFL-BST-2601-LL - Tee

- (1) (2) Male Flareless
(3) Male BSPT
Extra Light

MFL-BST-2601-LL-04-04-02
MFL-BST-2601-LL-06-06-02
MFL-BST-2601-LL-08-08-02

METRIC FLARELESS

Styles may vary from picture




MFL-BST-2601 - Tee

(1) (2) Male Flareless
(3) Male BSPT

Light

MFL-BST-2601-06-06-02
MFL-BST-2601-08-08-04
MFL-BST-2601-10-10-04
MFL-BST-2601-12-12-06
MFL-BST-2601-15-15-08
MFL-BST-2601-18-18-08




MFL-BST-2601-H - Tee

(1) (2) Male Flareless
(3) Male BSPT

Heavy

MFL-BST-2601-H-06-06-04
MFL-BST-2601-H-08-08-04
MFL-BST-2601-H-10-10-06
MFL-BST-2601-H-12-12-06
MFL-BST-2601-H-14-14-08
MFL-BST-2601-H-16-16-08

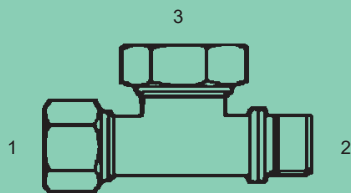


MFL-BST-2605-LL - Tee

(1) (3) Male Flareless
(2) Male BSPT

Extra Light

MFL-BST-2605-LL-04-02-04
MFL-BST-2605-LL-06-02-06
MFL-BST-2605-LL-08-02-08




MFL-BST-2605 - Tee

(1) (3) Male Flareless
(2) Male BSPT

Light

MFL-BST-2605-06-02-06
MFL-BST-2605-08-04-08
MFL-BST-2605-10-04-10
MFL-BST-2605-10-06-10
MFL-BST-2605-12-06-12
MFL-BST-2605-15-08-15
MFL-BST-2605-18-08-18

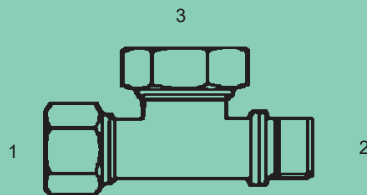

MFL-BST-2605-H - Tee

(1) (3) Male Flareless
(2) Male BSPT

Heavy

MFL-BST-2605-H-06-04-06
MFL-BST-2605-H-08-04-08
MFL-BST-2605-H-10-06-10
MFL-BST-2605-H-12-06-12
MFL-BST-2605-H-14-08-14
MFL-BST-2605-H-16-08-16



MFL-M-2404-LL - Str.

(1) Male Flareless
(2) Male Metric Parallel w/ Cutting Face Seal
Extra Light

MFL-M-2404-LL-04-08X1.0
MFL-M-2404-LL-06-10X1.0
MFL-M-2404-LL-08-10X1.0



MFL-M-2404 - Str.

(1) Male Flareless
(2) Male Metric Parallel w/ Cutting Face Seal
Light

MFL-M-2404-06-10X1.0
MFL-M-2404-08-12X1.5
MFL-M-2404-08-18X1.5
MFL-M-2404-10-14X1.5
MFL-M-2404-10-16X1.5
MFL-M-2404-10-18X1.5
MFL-M-2404-10-22X1.5
MFL-M-2404-12-14X1.5
MFL-M-2404-12-16X1.5
MFL-M-2404-12-18X1.5
MFL-M-2404-12-22X1.5
MFL-M-2404-15-16X1.5
MFL-M-2404-15-18X1.5
MFL-M-2404-15-22X1.5
MFL-M-2404-18-18X1.5
MFL-M-2404-18-22X1.5
MFL-M-2404-22-22X1.5
MFL-M-2404-22-26X1.5
MFL-M-2404-28-33X2.0
MFL-M-2404-35-42X2.0
MFL-M-2404-42-48X2.0

METRIC FLARELESS

Styles may vary from picture



MFL-M-2404-H - Str.

(1) Male Flareless
(2) Male Metric Parallel w/ Cutting Face Seal

Heavy

MFL-M-2404-H-06-12X1.5
MFL-M-2404-H-08-14X1.5
MFL-M-2404-H-10-16X1.5
MFL-M-2404-H-12-18X1.5
MFL-M-2404-H-12-22X1.5
MFL-M-2404-H-14-20X1.5
MFL-M-2404-H-16-18X1.5
MFL-M-2404-H-16-22X1.5
MFL-M-2404-H-20-27X2.0
MFL-M-2404-H-25-33X2.0
MFL-M-2404-H-30-42X2.0
MFL-M-2404-H-38-48X2.0



MFL-M-2405 - Str.

(1) Male Flareless
(2) Fem. Metric Parallel - Rigid

Light

MFL-M-2405-06-10X1.0
MFL-M-2405-08-12X1.5
MFL-M-2405-10-14X1.5
MFL-M-2405-12-16X1.5
MFL-M-2405-15-18X1.5
MFL-M-2405-18-22X1.5
MFL-M-2405-22-26X1.5
MFL-M-2405-28-33X2.0




MFL-M-2405-H - Str.

(1) Male Flareless
(2) Fem. Metric Parallel - Rigid

Heavy

MFL-M-2405-H-06-12X1.5
MFL-M-2405-H-08-14X1.5
MFL-M-2405-H-10-16X1.5
MFL-M-2405-H-12-18X1.5
MFL-M-2405-H-14-20X1.5
MFL-M-2405-H-16-22X1.5
MFL-M-2405-H-20-27X2.0
MFL-M-2405-H-25-33X2.0




MFL-M-2501 - 90°

(1) Male Flareless
(2) Male Metric Parallel w/ Cutting Face Seal

Light

MFL-M-2501-22-26X1.5
MFL-M-2501-28-33X2.0
MFL-M-2501-35-42X2.0
MFL-M-2501-42-48X2.0



MFL-M-2501-H - 90°

(1) Male Flareless
(2) Male Metric Parallel w/ Cutting Face Seal

Heavy

MFL-M-2501-H-20-27X2.0
MFL-M-2501-H-25-33X2.0
MFL-M-2501-H-30-42X2.0
MFL-M-2501-H-38-48X2.0




MFL-M-6400-EO - Str.

(1) Male Flareless
(2) Male Metric w/ Peflex Seal

Light

MFL-M-6400-06-10X1.0-EO
MFL-M-6400-08-12X1.5-EO
MFL-M-6400-08-18X1.5-EO
MFL-M-6400-10-14X1.5-EO
MFL-M-6400-10-16X1.5-EO
MFL-M-6400-10-18X1.5-EO
MFL-M-6400-10-22X1.5-EO
MFL-M-6400-12-14X1.5-EO
MFL-M-6400-12-16X1.5-EO
MFL-M-6400-12-18X1.5-EO
MFL-M-6400-12-22X1.5-EO
MFL-M-6400-15-16X1.5-EO
MFL-M-6400-15-18X1.5-EO
MFL-M-6400-15-22X1.5-EO
MFL-M-6400-18-18X1.5-EO
MFL-M-6400-18-22X1.5-EO
MFL-M-6400-22-22X1.5-EO
MFL-M-6400-22-26X1.5-EO
MFL-M-6400-28-33X2.0-EO
MFL-M-6400-35-42X2.0-EO
MFL-M-6400-42-48X2.0-EO



MFL-M-6400-ISO - Str.


(1) Male Flareless
(2) Male Metric w/ ISO O-Ring 6149

Light

MFL-M-6400-06-10X1.0-ISO
MFL-M-6400-08-12X1.5-ISO
MFL-M-6400-10-14X1.5-ISO
MFL-M-6400-12-16X1.5-ISO
MFL-M-6400-15-18X1.5-ISO
MFL-M-6400-18-22X1.5-ISO
MFL-M-6400-22-27X2.0-ISO
MFL-M-6400-28-33X2.0-ISO
MFL-M-6400-35-42X2.0-ISO
MFL-M-6400-42-48X2.0-ISO

METRIC FLARELESS

Styles may vary from picture



MFL-M-6400-H-EO - Str.

- (1) Male Flareless
 - (2) Male Metric w/ Peflex Seal
- Heavy**

MFL-M-6400-H-06-12X1.5-EO
MFL-M-6400-H-08-14X1.5-EO
MFL-M-6400-H-10-16X1.5-EO
MFL-M-6400-H-12-18X1.5-EO
MFL-M-6400-H-14-20X1.5-EO
MFL-M-6400-H-16-22X1.5-EO
MFL-M-6400-H-20-27X2.0-EO
MFL-M-6400-H-25-33X2.0-EO
MFL-M-6400-H-30-42X2.0-EO
MFL-M-6400-H-38-48X2.0-EO



MFL-M-6400-H-ISO - Str.

- (1) Male Flareless
 - (2) Male Metric w/ ISO O-Ring 6149
- Heavy**

MFL-M-6400-H-06-12X1.5-ISO
MFL-M-6400-H-08-14X1.5-ISO
MFL-M-6400-H-10-16X1.5-ISO
MFL-M-6400-H-12-18X1.5-ISO
MFL-M-6400-H-16-22X1.5-ISO
MFL-M-6400-H-20-27X2.0-ISO
MFL-M-6400-H-25-33X2.0-ISO
MFL-M-6400-H-30-42X2.0-ISO
MFL-M-6400-H-38-48X2.0-ISO




MFL-M-6510 - Str.

- (1) Fem. Flareless Swivel
- (2) Male Metric Parallel w/ Cutting Face Seal

Light


MFL-M-6510-06-10X1.0
MFL-M-6510-08-12X1.5
MFL-M-6510-10-14X1.5
MFL-M-6510-12-16X1.5
MFL-M-6510-15-18X1.5
MFL-M-6510-18-22X1.5
MFL-M-6510-22-26X1.5
MFL-M-6510-28-33X2.0
MFL-M-6510-35-42X2.0
MFL-M-6510-42-48X2.0



MFL-M-6510-EO - Str.

- (1) Fem. Flareless Swivel
 - (2) Male Metric Parallel w/ Peflex Seal
- Light**

MFL-M-6510-06-10X1.0-EO
MFL-M-6510-08-12X1.5-EO
MFL-M-6510-10-14X1.5-EO
MFL-M-6510-12-16X1.5-EO
MFL-M-6510-15-18X1.5-EO
MFL-M-6510-18-22X1.5-EO
MFL-M-6510-22-26X1.5-EO
MFL-M-6510-28-33X2.0-EO
MFL-M-6510-35-42X2.0-EO
MFL-M-6510-42-48X2.0-EO




MFL-M-6510-H - Str.

- (1) Fem. Flareless Swivel
- (2) Male Metric Parallel w/ Cutting Face Seal

Heavy


MFL-M-6510-H-06-12X1.5
MFL-M-6510-H-08-14X1.5
MFL-M-6510-H-10-16X1.5
MFL-M-6510-H-12-18X1.5
MFL-M-6510-H-14-20X1.5
MFL-M-6510-H-16-22X1.5
MFL-M-6510-H-20-27X2.0
MFL-M-6510-H-25-33X2.0
MFL-M-6510-H-30-42X2.0
MFL-M-6510-H-38-48X2.0



MFL-M-6510-H-EO - Str.

- (1) Fem. Flareless Swivel
 - (2) Male Metric Parallel w/ Peflex Seal
- Heavy**


MFL-M-6510-H-06-12X1.5-EO
MFL-M-6510-H-08-14X1.5-EO
MFL-M-6510-H-10-16X1.5-EO
MFL-M-6510-H-12-18X1.5-EO
MFL-M-6510-H-14-20X1.5-EO
MFL-M-6510-H-16-22X1.5-EO
MFL-M-6510-H-20-27X2.0-EO
MFL-M-6510-H-25-33X2.0-EO
MFL-M-6510-H-30-42X2.0-EO
MFL-M-6510-H-38-48X2.0-EO



MFL-M-6801-NWO - 90°

- (1) Male Flareless
 - (2) Male Metric w/ Washer O-Ring
- Light**


MFL-M-6801-06-10X1.0-NWO
MFL-M-6801-08-12X1.5-NWO
MFL-M-6801-10-14X1.5-NWO
MFL-M-6801-12-16X1.5-NWO
MFL-M-6801-18-22X1.5-NWO



MFL-M-6801-H-NWO - 90°

- (1) Male Flareless
 - (2) Male Metric w/ Washer O-Ring
- Heavy**

MFL-M-6801-H-06-12X1.5-NWO
MFL-M-6801-H-08-14X1.5-NWO
MFL-M-6801-H-30-42X2.0-NWO




MFL-M-6801-NWO-ISO - 90°

- (1) Male Flareless
- (2) Male Metric w/ ISO O-Ring 6149

MFL-M-6801-06-10X1.0-NWO-ISO
MFL-M-6801-08-12X1.5-NWO-ISO
MFL-M-6801-10-14X1.5-NWO-ISO
MFL-M-6801-12-16X1.5-NWO-ISO
MFL-M-6801-15-18X1.5-NWO-ISO
MFL-M-6801-18-22X1.5-NWO-ISO
MFL-M-6801-22-27X2.0-NWO-ISO
MFL-M-6801-28-33X2.0-NWO-ISO

METRIC FLARELESS

Styles may vary from picture



MFL-M-6801-H-NWO-ISO - 90°

- (1) Male Flareless
(2) Male Metric w/ ISO O-Ring 6149
Light

MFL-M-6801-H-16-22X1.5-NWO-ISO
MFL-M-6801-H-20-27X2.0-NWO-ISO
MFL-M-6801-H-25-33X2.0-NWO-ISO
MFL-M-6801-H-30-42X2.0-NWO-ISO



MFL-MB-6400-O - Str.

- (1) Male Flareless
(2) Male O-Ring Boss
Light


MFL-MB-6400-06-04-O
MFL-MB-6400-08-04-O
MFL-MB-6400-08-05-O
MFL-MB-6400-08-06-O
MFL-MB-6400-10-04-O
MFL-MB-6400-10-06-O
MFL-MB-6400-12-06-O
MFL-MB-6400-12-08-O
MFL-MB-6400-12-10-O
MFL-MB-6400-15-06-O
MFL-MB-6400-15-08-O
MFL-MB-6400-15-10-O
MFL-MB-6400-18-08-O
MFL-MB-6400-18-10-O
MFL-MB-6400-18-12-O
MFL-MB-6400-22-10-O
MFL-MB-6400-22-12-O
MFL-MB-6400-22-16-O
MFL-MB-6400-28-12-O
MFL-MB-6400-28-16-O
MFL-MB-6400-28-20-O
MFL-MB-6400-35-16-O
MFL-MB-6400-35-20-O
MFL-MB-6400-42-20-O



MFL-MB-6400-H-O - Str.

- (1) Male Flareless
(2) Male O-Ring Boss
Heavy


MFL-MB-6400-H-06-04-O
MFL-MB-6400-H-08-04-O
MFL-MB-6400-H-08-05-O
MFL-MB-6400-H-10-06-O
MFL-MB-6400-H-10-08-O
MFL-MB-6400-H-12-06-O
MFL-MB-6400-H-12-08-O
MFL-MB-6400-H-12-10-O
MFL-MB-6400-H-14-08-O
MFL-MB-6400-H-16-08-O
MFL-MB-6400-H-16-10-O
MFL-MB-6400-H-16-12-O
MFL-MB-6400-H-20-08-O
MFL-MB-6400-H-20-10-O
MFL-MB-6400-H-20-12-O
MFL-MB-6400-H-25-12-O
MFL-MB-6400-H-25-16-O
MFL-MB-6400-H-30-12-O
MFL-MB-6400-H-30-16-O
MFL-MB-6400-H-30-20-O
MFL-MB-6400-H-38-20-O
MFL-MB-6400-H-38-24-O



MFL-MB-6510-O - Str.

- (1) Fem. Flareless Swivel
(2) Male O-Ring Boss
Light


MFL-MB-6510-08-04-O
MFL-MB-6510-10-06-O
MFL-MB-6510-12-08-O
MFL-MB-6510-15-08-O



MFL-MB-6510-H-O - Str.

- (1) Fem. Flareless Swivel
(2) Male O-Ring Boss
Heavy


MFL-MB-6510-H-10-06-O
MFL-MB-6510-H-20-16-O



MFL-MB-6801-NWO - 90°

- (1) Male Flareless
(2) Male O-Ring Boss
Light

MFL-MB-6801-06-04-NWO
MFL-MB-6801-08-04-NWO
MFL-MB-6801-10-06-NWO
MFL-MB-6801-12-06-NWO
MFL-MB-6801-12-08-NWO
MFL-MB-6801-15-08-NWO
MFL-MB-6801-15-10-NWO
MFL-MB-6801-18-10-NWO
MFL-MB-6801-18-12-NWO
MFL-MB-6801-22-12-NWO
MFL-MB-6801-28-16-NWO
MFL-MB-6801-35-20-NWO




MFL-MB-6801-H-NWO - 90°

- (1) Male Flareless
(2) Male O-Ring Boss
Heavy

MFL-MB-6801-H-08-06-NWO
MFL-MB-6801-H-10-06-NWO
MFL-MB-6801-H-12-08-NWO
MFL-MB-6801-H-16-10-NWO
MFL-MB-6801-H-20-12-NWO
MFL-MB-6801-H-25-12-NWO

METRIC FLARELESS


Styles may vary from picture



MFL-MJ-3901-LL - Str.

- (1) Male 37°
- (2) Male Metric Dual Purpose (Port or Tube)
Extra Light


MFL-MJ-3901-LL-04-10X1.0
MFL-MJ-3901-LL-04-12X1.0



MFL-MJ-3901 - Str.

- (1) Male 37°
- (2) Male Metric Dual Purpose (Port of Tube)
Light


MFL-MJ-3901-04-08X1.0
MFL-MJ-3901-04-08X1.25
MFL-MJ-3901-04-10X1.25
MFL-MJ-3901-04-10X1.5
MFL-MJ-3901-04-12X1.5
MFL-MJ-3901-04-14X1.5
MFL-MJ-3901-04-18X1.5
MFL-MJ-3901-06-12X1.0
MFL-MJ-3901-06-14X1.5
MFL-MJ-3901-06-16X1.5
MFL-MJ-3901-06-18X1.5
MFL-MJ-3901-08-16X1.5
MFL-MJ-3901-08-18X1.5
MFL-MJ-3901-08-22X1.5
MFL-MJ-3901-08-26X1.5
MFL-MJ-3901-10-18X1.5
MFL-MJ-3901-10-22X1.5
MFL-MJ-3901-10-26X1.5
MFL-MJ-3901-12-22X1.5
MFL-MJ-3901-12-24X1.5
MFL-MJ-3901-12-26X1.5
MFL-MJ-3901-12-30X1.5
MFL-MJ-3901-12-30X2.0
MFL-MJ-3901-12-36X1.5
MFL-MJ-3901-16-30X1.5
MFL-MJ-3901-16-36X1.5
MFL-MJ-3901-16-36X2.0
MFL-MJ-3901-16-40X1.5
MFL-MJ-3901-16-45X1.5
MFL-MJ-3901-20-45X2.0
MFL-MJ-3901-20-48X1.5
MFL-MJ-3901-24-52X2.0



MFL-MJ-3901-H - Str.

- (1) Male 37°
- (2) Male Metric Dual Purpose (Port or Tube)
Heavy


MFL-MJ-3901-H-04-14X1.5
MFL-MJ-3901-H-04-16X1.5
MFL-MJ-3901-H-04-18X1.5
MFL-MJ-3901-H-06-14X1.5
MFL-MJ-3901-H-06-16X1.5
MFL-MJ-3901-H-06-18X1.5
MFL-MJ-3901-H-06-20X1.5
MFL-MJ-3901-H-06-22X1.5
MFL-MJ-3901-H-08-18X1.5
MFL-MJ-3901-H-08-20X1.5
MFL-MJ-3901-H-08-22X1.5
MFL-MJ-3901-H-08-24X1.5
MFL-MJ-3901-H-10-20X1.5
MFL-MJ-3901-H-10-22X1.5
MFL-MJ-3901-H-10-24X1.5
MFL-MJ-3901-H-10-30X2.0
MFL-MJ-3901-H-12-24X1.5
MFL-MJ-3901-H-12-30X2.0
MFL-MJ-3901-H-12-36X2.0
MFL-MJ-3901-H-16-30X2.0
MFL-MJ-3901-H-16-36X2.0
MFL-MJ-3901-H-16-42X2.0
MFL-MJ-3901-H-20-36X2.0
MFL-MJ-3901-H-20-42X2.0
MFL-MJ-3901-H-20-52X2.0
MFL-MJ-3901-H-24-52X2.0



MFL-MJ-6510 - Str.

- (1) Male 37°
- (2) Fem. Flareless Swivel
Light

MFL-MJ-6510-04-12X1.5
MFL-MJ-6510-04-14X1.5
MFL-MJ-6510-05-12X1.5
MFL-MJ-6510-06-14X1.5
MFL-MJ-6510-06-16X1.5
MFL-MJ-6510-06-18X1.5
MFL-MJ-6510-06-22X1.5
MFL-MJ-6510-08-16X1.5
MFL-MJ-6510-08-18X1.5
MFL-MJ-6510-08-22X1.5
MFL-MJ-6510-10-18X1.5
MFL-MJ-6510-10-22X1.5
MFL-MJ-6510-12-26X1.5
MFL-MJ-6510-12-30X2.0
MFL-MJ-6510-16-30X2.0
MFL-MJ-6510-16-36X2.0
MFL-MJ-6510-20-45X2.0
MFL-MJ-6510-24-52X2.0




MFL-MJ-6510-H - Str.

- (1) Male 37°
- (2) Fem. Flareless Swivel
Heavy

MFL-MJ-6510-H-04-14X1.5
MFL-MJ-6510-H-04-18X1.5
MFL-MJ-6510-H-05-20X1.5
MFL-MJ-6510-H-06-16X1.5
MFL-MJ-6510-H-06-18X1.5
MFL-MJ-6510-H-06-20X1.5
MFL-MJ-6510-H-06-22X1.5
MFL-MJ-6510-H-08-18X1.5
MFL-MJ-6510-H-08-20X1.5
MFL-MJ-6510-H-08-22X1.5
MFL-MJ-6510-H-08-24X1.5
MFL-MJ-6510-H-10-20X1.5
MFL-MJ-6510-H-10-22X1.5
MFL-MJ-6510-H-10-30X2.0
MFL-MJ-6510-H-12-24X1.5
MFL-MJ-6510-H-12-30X2.0
MFL-MJ-6510-H-12-36X2.0
MFL-MJ-6510-H-16-30X2.0
MFL-MJ-6510-H-16-36X2.0
MFL-MJ-6510-H-16-42X2.0
MFL-MJ-6510-H-20-52X2.0
MFL-MJ-6510-H-24-52X2.0

METRIC FLARELESS

Styles may vary from picture



MFL-MJ-6511 - Str.

- (1) Male 37°
(2) Metric Standpipe
Light

MFL-MJ-6511-04-06
MFL-MJ-6511-04-08
MFL-MJ-6511-04-10
MFL-MJ-6511-06-08
MFL-MJ-6511-06-10
MFL-MJ-6511-06-12
MFL-MJ-6511-06-14
MFL-MJ-6511-08-10
MFL-MJ-6511-08-12
MFL-MJ-6511-08-14
MFL-MJ-6511-08-15
MFL-MJ-6511-08-16
MFL-MJ-6511-10-15
MFL-MJ-6511-10-16
MFL-MJ-6511-10-18
MFL-MJ-6511-10-20
MFL-MJ-6511-12-16
MFL-MJ-6511-12-18
MFL-MJ-6511-12-20
MFL-MJ-6511-12-22
MFL-MJ-6511-12-25
MFL-MJ-6511-16-22
MFL-MJ-6511-16-25
MFL-MJ-6511-16-28
MFL-MJ-6511-16-30
MFL-MJ-6511-20-28
MFL-MJ-6511-20-35
MFL-MJ-6511-20-38
MFL-MJ-6511-24-42



MFL-MP-2404-LL - 90°

- (1) Male Flareless
(2) Male NPT
Extra Light

MFL-MP-2404-LL-04-02
MFL-MP-2404-LL-06-02
MFL-MP-2404-LL-08-02



MFL-MP-2404 - Str.

- (1) Male Flareless
(2) Male NPT
Light


MFL-MP-2404-06-02
MFL-MP-2404-06-04
MFL-MP-2404-08-04
MFL-MP-2404-08-06
MFL-MP-2404-10-02
MFL-MP-2404-10-04
MFL-MP-2404-10-06
MFL-MP-2404-10-08
MFL-MP-2404-12-04
MFL-MP-2404-12-06
MFL-MP-2404-12-08
MFL-MP-2404-15-08
MFL-MP-2404-18-08
MFL-MP-2404-22-12
MFL-MP-2404-28-16
MFL-MP-2404-35-20
MFL-MP-2404-42-24



MFL-MP-2404-H - Str.

- (1) Male Flareless
(2) Male NPT
Heavy


MFL-MP-2404-H-06-04
MFL-MP-2404-H-08-04
MFL-MP-2404-H-10-04
MFL-MP-2404-H-10-06
MFL-MP-2404-H-12-04
MFL-MP-2404-H-12-06
MFL-MP-2404-H-12-08
MFL-MP-2404-H-14-08
MFL-MP-2404-H-16-08
MFL-MP-2404-H-20-12
MFL-MP-2404-H-25-12
MFL-MP-2404-H-25-16
MFL-MP-2404-H-30-20
MFL-MP-2404-H-38-24



MFL-MP-2501-LL - 90°

- (1) Male Flareless
(2) Male NPT
Extra Light


MFL-MP-2501-LL-04-02
MFL-MP-2501-LL-06-02
MFL-MP-2501-LL-08-02



MFL-MP-2501 - 90°

- (1) Male Flareless
(2) Male NPT
Light

MFL-MP-2501-06-02
MFL-MP-2501-06-04
MFL-MP-2501-08-04
MFL-MP-2501-10-04
MFL-MP-2501-12-04
MFL-MP-2501-12-06
MFL-MP-2501-12-08
MFL-MP-2501-15-08
MFL-MP-2501-18-08
MFL-MP-2501-22-12
MFL-MP-2501-28-16
MFL-MP-2501-35-20
MFL-MP-2501-42-24




MFL-MP-2501-H - 90°

- (1) Male Flareless
(2) Male NPT
Heavy

MFL-MP-2501-H-06-04
MFL-MP-2501-H-08-04
MFL-MP-2501-H-10-06
MFL-MP-2501-H-12-06
MFL-MP-2501-H-14-08
MFL-MP-2501-H-16-08
MFL-MP-2501-H-20-12
MFL-MP-2501-H-25-16
MFL-MP-2501-H-30-20
MFL-MP-2501-H-38-24

METRIC FLARELESS

Styles may vary from picture




MFL-MP-2601 - Tee

(1) (2) Male Flareless
(3) Male NPT

Light

MFL-MP-2601-06-06-02
MFL-MP-2601-08-08-04
MFL-MP-2601-10-10-04
MFL-MP-2601-12-12-06




MFL-MP-2601-H - Tee

(1) (2) Male Flareless
(3) Male NPT

Heavy

MFL-MP-2601-H-06-06-04
MFL-MP-2601-H-12-12-06




MFL-MP-6510 - Str.

(1) Fem. Flareless Swivel
(2) Male NPT

Light

MFL-MP-6510-06-02
MFL-MP-6510-08-04
MFL-MP-6510-10-04
MFL-MP-6510-12-06
MFL-MP-6510-15-08
MFL-MP-6510-18-08
MFL-MP-6510-22-12
MFL-MP-6510-28-16
MFL-MP-6510-35-20
MFL-MP-6510-42-24




MFL-MP-6510-H - Str.

(1) Fem. Flareless Swivel
(2) Male NPT

Heavy

MFL-MP-6510-H-06-04
MFL-MP-6510-H-08-04
MFL-MP-6510-H-10-06
MFL-MP-6510-H-12-06
MFL-MP-6510-H-14-08
MFL-MP-6510-H-16-08
MFL-MP-6510-H-20-12
MFL-MP-6510-H-25-16
MFL-MP-6510-H-30-20
MFL-MP-6510-H-38-24



MFL-MT-2404-LL - Str.

(1) Male Flareless
(2) Male Metric Taper

Extra Light

MFL-MT-2404-LL-04-06X1.0
MFL-MT-2404-LL-04-08X1.0
MFL-MT-2404-LL-06-08X1.0
MFL-MT-2404-LL-06-10X1.0
MFL-MT-2404-LL-08-10X1.0




MFL-MT-2404 - Str.

(1) Male Flareless
(2) Male Metric Taper

Light

MFL-MT-2404-06-10X1.0
MFL-MT-2404-08-12X1.5
MFL-MT-2404-10-14X1.5
MFL-MT-2404-12-16X1.5
MFL-MT-2404-15-18X1.5
MFL-MT-2404-18-22X1.5
MFL-MT-2404-22-26X1.5
MFL-MT-2404-42-48X2.0




MFL-MT-2404-H - Str.

(1) Male Flareless
(2) Male Metric Taper

Heavy

MFL-MT-2404-H-06-12X1.5
MFL-MT-2404-H-08-14X1.5
MFL-MT-2404-H-10-16X1.5
MFL-MT-2404-H-12-18X1.5
MFL-MT-2404-H-14-20X1.5
MFL-MT-2404-H-16-22X1.5
MFL-MT-2404-H-20-27X2.0




MFL-MT-2501-LL - 90°

(1) Male Flareless
(2) Male Metric Taper

Extra Light

MFL-MT-2501-LL-04-06X1.0
MFL-MT-2501-LL-04-08X1.0
MFL-MT-2501-LL-06-10X1.0
MFL-MT-2501-LL-08-10X1.0



MFL-MT-2501 - 90°


(1) Male Flareless
(2) Male Metric Taper

Light

MFL-MT-2501-06-10X1.0
MFL-MT-2501-08-12X1.5
MFL-MT-2501-10-14X1.5
MFL-MT-2501-12-16X1.5
MFL-MT-2501-15-18X1.5
MFL-MT-2501-18-22X1.5


METRIC FLARELESS

Styles may vary from picture




MFL-MT-2501-H - 90°
(1) Male Flareless
(2) Male Metric Taper
Heavy

MFL-MT-2501-H-06-12X1.5
MFL-MT-2501-H-08-14X1.5
MFL-MT-2501-H-10-16X1.5
MFL-MT-2501-H-12-18X1.5
MFL-MT-2501-H-14-20X1.5
MFL-MT-2501-H-16-22X1.5

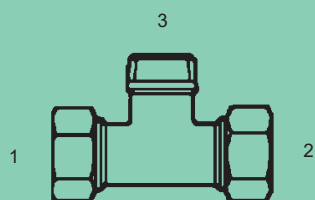


MFL-MT-2601-LL - Tee
(1) (2) Male Flareless
(3) Male Metric Taper
Extra Light

MFL-MT-2601-LL-04-04-08X1.0
MFL-MT-2601-LL-06-06-10X1.0
MFL-MT-2601-LL-08-08-10X1.0

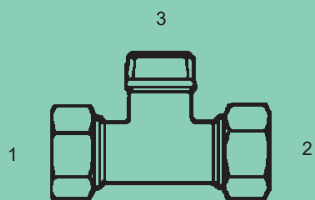


MFL-MT-2601 - Tee
(1) (2) Male Flareless
(3) Male Metric Taper
Light

MFL-MT-2601-06-06-10X1.0
MFL-MT-2601-08-08-12X1.5
MFL-MT-2601-10-10-14X1.5
MFL-MT-2601-12-12-16X1.5
MFL-MT-2601-15-15-18X1.5
MFL-MT-2601-18-18-22X1.5

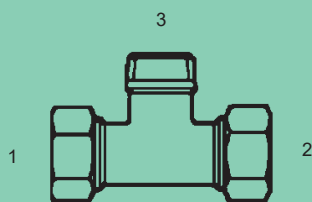


MFL-MT-2601-H - Tee
(1) (2) Male Flareless
(3) Male Metric Taper
Heavy

MFL-MT-2601-H-10-10-16X1.5
MFL-MT-2601-H-12-12-18X1.5
MFL-MT-2601-H-16-16-22X1.5

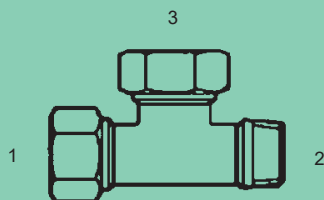


MFL-MT-2605-LL - Tee
(1) (3) Male Flareless
(2) Male Metric Taper
Extra Light

MFL-MT-2605-LL-04-08X1.0-04
MFL-MT-2605-LL-06-10X1.0-06
MFL-MT-2605-LL-08-10X1.0-08

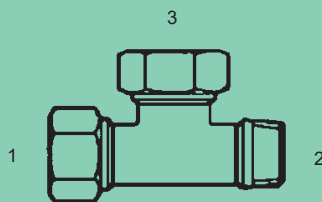


MFL-MT-2605 - Tee
(1) (3) Male Flareless
(2) Male Metric Taper
Light

MFL-MT-2605-06-10X1.0-06
MFL-MT-2605-08-12X1.5-08
MFL-MT-2605-10-14X1.5-10
MFL-MT-2605-12-16X1.5-12
MFL-MT-2605-15-18X1.5-15
MFL-MT-2605-18-22X1.5-18

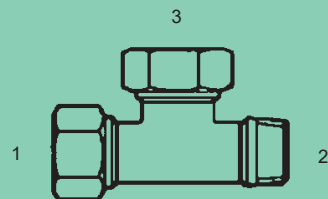

MFL-MT-2605-H - Tee
(1) (3) Male Flareless
(2) Male Metric Taper
Heavy

MFL-MT-2605-H-08-14X1.5-08
MFL-MT-2605-H-10-16X1.5-10
MFL-MT-2605-H-12-18X1.5-12

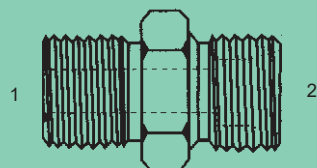

MFL-OFS-3901 - Str.
(1) Male O-Ring Face Seal
(2) Male Metric Dual Purpose

MFL-OFS-3901-04-12X1.5
MFL-OFS-3901-06-18X1.5
MFL-OFS-3901-08-22X1.5



MFL-SPO-2272 - Str.
(1) Male Push On
(2) Male Metric 24°

MFL-SPO-2272-04-06
MFL-SPO-2272-04-08
MFL-SPO-2272-06-10
MFL-SPO-2272-06-12

METRIC FLARELESS


Styles may vary from picture



MFL-SPO-2278 - Str.

- (1) Male Push On
(2) Fem. Metric 24° Swivel


MFL-SPO-2278-04-06
MFL-SPO-2278-04-08
MFL-SPO-2278-06-10
MFL-SPO-2278-06-12
MFL-SPO-2278-08-15
MFL-SPO-2278-10-18
MFL-SPO-2278-12-22



MFL-SPO-2305 - 45°

- (1) Male Push On
(2) Fem. Metric 24° Swivel

MFL-SPO-2305-06-10




MFL-SPO-2306 - 90°

- (1) Male Push On
(2) Fem. Metric 24° Swivel

MFL-SPO-2306-06-10
MFL-SPO-2306-06-12
MFL-SPO-2306-08-15

METRIC MISCELLANEOUS

Styles may vary from picture



MT-FJX-6505 - Str.

(1) Fem. 37° Swivel

(2) Male Metric Taper

MT-FJX-6505-04-10X1.0

MT-FJX-6505-05-12X1.5

MT-FJX-6505-06-14X1.5

MT-FJX-6505-08-16X1.5

MT-FJX-6505-10-20X1.5

MT-FJX-6505-12-24X1.5

MT-FJX-6505-16-27X2.0

MT-FJX-6505-20-36X2.0

PARTS INDEX

BPP-0304-C.....	3	BPP-MJ-2404	13	JISM-0304-C	22
BPP-0306	3	BPP-MJ-2405	13	JISM-2403	23
BPP-1404	3	BPP-MJ-2501	13	JISM-2408	23
BPP-1406	3	BPP-MJ-6400-DS	13	JISM-6500	23
BPP-1501	3	BPP-MJ-6400-WO	14	JISM-6602	23
BPP-1501-L	3	BPP-MJ-6400-L-WO	14	JISM-MJ-2403	23
BPP-1503-L	4	BPP-MJ-6500	14	JISM-MJ-2406	23
BPP-1506	4	BPP-MJ-6500-L	14	JISM-MOFS-2406	23
BPP-1506-L	4	BPP-MJ-6502-L	14	JISM-MP-2404.....	23
BPP-1514-L	4	BPP-MJ-6510	14	JISM-OFS-2403.....	23
BPP-1603	4	BPP-MJ-6801-NWO	15	M-0319.....	24
BPP-1652	4	BPP-MJ-6801-L-NWO	15	M-4000.....	24
BPP-1660	4	BPP-MJ-6802-NWO	15	M-4000-EO	24
BPP-1662	4	BPP-MJ-6803-NWO	15	M-4000-ISO	24
BPP-1663	5	BPP-MJ-6804-NWO	15	M-5000.....	24
BPP-4000	5	BPP-MP-1404	16	M-5404.....	24
BPP-4000-EO	5	BPP-MP-1501	16	M-6000.....	25
BPP-5000	5	BPP-MP-5404	16	M-6001.....	25
BPP-5404	5	BPP-MP-5405	16	M-6408.....	25
BPP-5404-BH-LN	6	BPP-MP-5500	16	M-6408-ISO	25
BPP-5405	6	BPP-OFS-2404	17	M-6408-HHP-EO	25
BPP-5406	6	BPP-OFS-6400-EO	17	M-6408-HHP-ISO	25
BPP-5500	6	BPP-OFS-6400-WO	17	M-6410.....	25
BPP-5502	6	BPP-OFS-6400-L-WO	17	M-FB-6410-WO	26
BPP-5504	6	BPP-OFS-6801-NWO	17	M-FBPP-5405	26
BPP-5505	7	BPP-OFS-6802-NWO	17	M-FBPP-6510	26
BPP-5600	7	BPP-OFS-6803-NWO	17	M-FJX-6402-DS.....	26
BPP-5605	7	BPP-OFS-6804-NWO	18	M-FJX-6402-WO	26
BPP-6000	7	BPPOFS-MJ-6510.....	18	M-FJX-6505.....	26
BPP-6000-C.....	7	BPP-SPO-2272	18	MFL-0304-C.....	31
BPP-6001	7	BPP-SPO-2278	18	MFL-0304-C-H.....	31
BPP-6403-EO	7	BPP-SPO-2305	18	MFL-0306	31
BPP-6408	7	BPP-SPO-2306	18	MFL-0306-H.....	31
BPP-6408-HHP-EO	8	BST-5404	19	MFL-0318	31
BPP-6410-EO	8	BST-5406	19	MFL-0318-H.....	31
BPP-7801-NWO	8	BST-5406-HHP	19	MFL-0318-LL	31
BPP-7802-NWO	8	BST-5406-P	19	MFL-0319	31
BPP-7803-NWO	8	BST-BPO-2272	19	MFL-0319-H.....	32
BPP-7804-NWO	8	BST-FBPP-5405	19	MFL-0319-LL	31
BPP-BST-5404	8, 9	BST-FJX-6505.....	19	MFL-0320	32
BPP-BST-5500	9	BST-FP-5405.....	20	MFL-0320-H.....	32
BPP-BST-5501	9	BST-MJ-2404.....	20	MFL-2403	32
BPP-FB-6410.....	9	BST-MJ-2501.....	20	MFL-2403-H.....	32
BPP-FB-6410-WO	9	BST-MJ-2503	20	MFL-2403-LL	32
BPP-FBST-1405	9	BST-MJ-2601	20	MFL-2406	33
BPP-FBST-5405	9	BST-MJ-2605.....	20	MFL-2406-H.....	33
BPP-FJX-6402-DS.....	9	BST-MP-5404	20	MFL-2408	33
BPP-FJX-6402-EO	10	BST-SPO-2272	19	MFL-2408-H.....	33
BPP-FJX-6402-WO	10	JISBP-0304-C	21	MFL-2500	33
BPP-FJX-6501.....	10	JISBP-0321	21	MFL-2500-H.....	34
BPP-FJX-6505.....	10	JISBP-2403	21	MFL-2500-LL	33
BPP-FJX-6565.....	10	JISBP-2408	21	MFL-2603	34
BPP-FOFS-6510	10	JISBP-6500	21	MFL-2603-H.....	34
BPP-FP-5000.....	11	JISBP-6602	21	MFL-2603-LL	34
BPP-FP-5405.....	11	JISBP-BPP-6801-NWO	21	MFL-2650	34
BPP-FP-6405-DS.....	11	JISBP-BST-2404	21	MFL-2650-H.....	34
BPP-FP-6405-WO	11	JISBP-BST-2501	22	MFL-2650-LL	34
BPP-M-5404	11	JISBP-BST-2503	22	MFL-2700-H-LN.....	35
BPP-MB-6401-O	12	JISBP-MB-6400-O	22	MFL-2700-LN.....	35
BPP-MB-6803-NWO	12	JISBP-MJ-2403	22	MFL-2701-H-LN.....	35
BPP-MB-6804-NWO	12	JISBP-MJ-2406	22	MFL-2701-LN.....	35
BPP-MB-6806-NWO	12	JISBP-MOFS-2406	22	MFL-6500	35
BPP-MBST-1404	12	JISBP-MP-2404.....	22	MFL-6500-H.....	35
BPP-MBST-1501	12	JISBP-OFS-2403.....	22	MFL-6565	35

PARTS INDEX

MFL-6565-H.....	35	MFL-MJ-3901-H.....	44
MFL-6600	35	MFL-MJ-3901-LL	44
MFL-6600-H.....	36	MFL-MJ-6510.....	44
MFL-6602	36	MFL-MJ-6510-H.....	44
MFL-6602-H.....	36	MFL-MJ-6511	45
MFL-BPP-2404	36	MFL-MP-2404	45
MFL-BPP-2404-H	36	MFL-MP-2404-H	45
MFL-BPP-2405	37	MFL-MP-2404-LL.....	45
MFL-BPP-2405-H	37	MFL-MP-2501	45
MFL-BPP-2501	37	MFL-MP-2501-H	45
MFL-BPP-2501-H	37	MFL-MP-2501-LL.....	45
MFL-BPP-2601	37	MFL-MP-2601	46
MFL-BPP-2601-H	37	MFL-MP-2601-H	46
MFL-BPP-2605	37	MFL-MP-6510	46
MFL-BPP-2605-H	37	MFL-MP-6510-H	46
MFL-BPP-6400-EO	38	MFL-MT-2404.....	46
MFL-BPP-6400-H-EO	38	MFL-MT-2404-H.....	46
MFL-BPP-6510	38	MFL-MT-2404-LL	46
MFL-BPP-6510-EO	38	MFL-MT-2501.....	46
MFL-BPP-6510-H	38	MFL-MT-2501-H.....	47
MFL-BPP-6510-H-EO	38	MFL-MT-2501-LL	46
MFL-BPP-6801-NWO	38	MFL-MT-2601.....	47
MFL-BPP-6801-H-NWO	39	MFL-MT-2601-H.....	47
MFL-BPP-6810-NWO	39	MFL-MT-2601-LL	47
MFL-BST-2404	39	MFL-MT-2605.....	47
MFL-BST-2404-H.....	39	MFL-MT-2605-H.....	47
MFL-BST-2404-LL	39	MFL-MT-2605-LL	47
MFL-BST-2501	39	MFL-OFS-3901	47
MFL-BST-2501-H.....	39	MFL-SPO-2272	47
MFL-BST-2501-LL	39	MFL-SPO-2278	48
MFL-BST-2601	40	MFL-SPO-2305	48
MFL-BST-2601-H.....	40	MFL-SPO-2306	48
MFL-BST-2601-LL	39	M-FP-5405	26
MFL-BST-2605	40	M-FP-6405-DS.....	27
MFL-BST-2605-H.....	40	M-FP-6405-WO	27
MFL-BST-2605-LL	40	M-MJ-2404	27
MFL-M-2404	40	M-MJ-6400-DS.....	28
MFL-M-2404-H	41	M-MJ-6400-WO	28
MFL-M-2404-LL.....	40	M-MJ-6801-NWO	28
MFL-M-2405	41	M-MJ-6801-L-NWO	28
MFL-M-2405-H	41	M-MJ-6802-NWO	28
MFL-M-2501	41	M-MJ-6803-NWO	29
MFL-M-2501-H	41	M-MJ-6804-NWO	29
MFL-M-6400-EO	41	M-MP-5405	29
MFL-M-6400-ISO.....	41	M-OFS-6400-EO	29
MFL-M-6400-H-EO	42	M-OFS-6400-WO	29
MFL-M-6400-H-ISO	42	M-OFS-6400-L-WO	29
MFL-M-6510.....	42	M-OFS-6801-NWO	29
MFL-M-6510-EO	42	M-OFS-6801-NWO-ISO	30
MFL-M-6510-H.....	42	M-OFS-6802-NWO-ISO	30
MFL-M-6510-H-EO	42	M-OFS-6803-NWO-ISO	30
MFL-M-6801-NWO.....	42	M-OFS-6804-NWO	30
MFL-M-6801-NWO-ISO	42	M-SBT-2404.....	30
MFL-M-6801-H-NWO.....	42	MT-FJX-6505	49
MFL-M-6801-H-NWO-ISO	43		
MFL-MB-6400-O	43		
MFL-MB-6400-H-O	43		
MFL-MB-6510-O	43		
MFL-MB-6510-H-O	43		
MFL-MB-6801-NWO	43		
MFL-MB-6801-H-NWO	43		
MFL-MJ-3901.....	44		



1-800-348-8467